

USER'S MANUAL

LAYER 3 12PORT GIGABIT INTELLIGENT SWITCH

SF-0408MGL

PLANEX COMMUNICATIONS INC.

Management Guide

LAYER 3 12PORT GIGABIT INTELLIGENT SWITCH

*Layer 3 Workgroup Switch with 8 SFP Ports,
and 4 Gigabit Combination (RJ-45/SFP) Ports*

Planex L3 Switch SF-0408MGL
E092005-R01

Contents

Chapter 1: Introduction	1-1
Key Features	1-1
Description of Software Features	1-2
System Defaults	1-6

Chapter 2: Initial Configuration	2-1
Connecting to the Switch	2-1
Configuration Options	2-1
Required Connections	2-2
Remote Connections	2-3
Basic Configuration	2-3
Console Connection	2-3
Setting Passwords	2-4
Setting an IP Address	2-4
Manual Configuration	2-4
Dynamic Configuration	2-5
Enabling SNMP Management Access	2-6
Community Strings (for SNMP version 1 and 2c clients)	2-6
Trap Receivers	2-7
Configuring Access for SNMP Version 3 Clients	2-8
Saving Configuration Settings	2-8
Managing System Files	2-9

Chapter 3: Configuring the Switch	3-1
Using the Web Interface	3-1
Navigating the Web Browser Interface	3-2
Home Page	3-2
Configuration Options	3-3
Panel Display	3-3
Main Menu	3-4
Basic Configuration	3-11
Displaying System Information	3-11
Displaying Switch Hardware/Software Versions	3-12
Displaying Bridge Extension Capabilities	3-14
Setting the Switch's IP Address	3-15
Manual Configuration	3-16
Using DHCP/BOOTP	3-18
Managing Firmware	3-19
Downloading System Software from a Server	3-20
Saving or Restoring Configuration Settings	3-22
Downloading Configuration Settings from a Server	3-23

Console Port Settings	3-24
Telnet Settings	3-26
Configuring Event Logging	3-28
System Log Configuration	3-28
Remote Log Configuration	3-30
Displaying Log Messages	3-32
Resetting the System	3-32
Setting the System Clock	3-33
Configuring SNTP	3-33
Setting the Time Zone	3-34
Simple Network Management Protocol	3-35
Enabling the SNMP Agent	3-36
Setting Community Access Strings	3-36
Specifying Trap Managers and Trap Types	3-37
Configuring SNMPv3 Management Access	3-38
Setting an Engine ID	3-38
Configuring SNMPv3 Users	3-39
Configuring SNMPv3 Groups	3-41
Setting SNMPv3 Views	3-43
User Authentication	3-44
Configuring User Accounts	3-44
Configuring Local/Remote Logon Authentication	3-46
Configuring HTTPS	3-48
Replacing the Default Secure-site Certificate	3-49
Configuring the Secure Shell	3-50
Generating the Host Key Pair	3-52
Configuring the SSH Server	3-54
Configuring Port Security	3-55
Configuring 802.1X Port Authentication	3-57
Displaying 802.1X Global Settings	3-58
Configuring 802.1X Global Settings	3-60
Configuring Port Authorization Mode	3-61
Displaying 802.1X Statistics	3-62
Filtering IP Addresses for Management Access	3-64
Access Control Lists	3-66
Configuring Access Control Lists	3-66
Setting the ACL Name and Type	3-67
Configuring a Standard IP ACL	3-67
Configuring an Extended IP ACL	3-69
Configuring a MAC ACL	3-71
Configuring ACL Masks	3-73
Specifying the Mask Type	3-73
Configuring an IP ACL Mask	3-74
Configuring a MAC ACL Mask	3-76
Binding a Port to an Access Control List	3-77

Port Configuration	3-78
Displaying Connection Status	3-78
Configuring Interface Connections	3-81
Creating Trunk Groups	3-84
Statically Configuring a Trunk	3-85
Enabling LACP on Selected Ports	3-86
Configuring LACP Parameters	3-88
Displaying LACP Port Counters	3-90
Displaying LACP Settings and Status for the Local Side	3-91
Displaying LACP Settings and Status for the Remote Side	3-93
Setting Broadcast Storm Thresholds	3-94
Configuring Port Mirroring	3-96
Configuring Rate Limits	3-97
Showing Port Statistics	3-98
Address Table Settings	3-102
Setting Static Addresses	3-102
Displaying the Address Table	3-103
Changing the Aging Time	3-105
Spanning Tree Algorithm Configuration	3-105
Displaying Global Settings	3-106
Configuring Global Settings	3-109
Displaying Interface Settings	3-113
Configuring Interface Settings	3-116
Configuring Multiple Spanning Trees	3-118
Displaying Interface Settings for MSTP	3-121
Configuring Interface Settings for MSTP	3-122
VLAN Configuration	3-124
IEEE 802.1Q VLANs	3-124
Enabling or Disabling GVRP (Global Setting)	3-127
Displaying Basic VLAN Information	3-127
Displaying Current VLANs	3-128
Creating VLANs	3-129
Adding Static Members to VLANs (VLAN Index)	3-130
Adding Static Members to VLANs (Port Index)	3-132
Configuring VLAN Behavior for Interfaces	3-133
Configuring Private VLANs	3-135
Enabling Private VLANs	3-135
Configuring Uplink and Downlink Ports	3-136
Configuring Protocol-Based VLANs	3-136
Configuring Protocol Groups	3-137
Mapping Protocols to VLANs	3-138
Class of Service Configuration	3-139
Layer 2 Queue Settings	3-139
Setting the Default Priority for Interfaces	3-139
Mapping CoS Values to Egress Queues	3-141

Selecting the Queue Mode	3-143
Setting the Service Weight for Traffic Classes	3-143
Layer 3/4 Priority Settings	3-145
Mapping Layer 3/4 Priorities to CoS Values	3-145
Selecting IP Precedence/DSCP Priority	3-145
Mapping IP Precedence	3-146
Mapping DSCP Priority	3-147
Mapping IP Port Priority	3-149
Mapping CoS Values to ACLs	3-150
Changing Priorities Based on ACL Rules	3-151
Multicast Filtering	3-153
IGMP Protocol	3-153
Layer 2 IGMP (Snooping and Query)	3-154
Configuring IGMP Snooping and Query Parameters	3-155
Displaying Interfaces Attached to a Multicast Router	3-157
Specifying Static Interfaces for a Multicast Router	3-158
Displaying Port Members of Multicast Services	3-159
Assigning Ports to Multicast Services	3-160
Layer 3 IGMP (Query used with Multicast Routing)	3-161
Configuring IGMP Interface Parameters	3-161
Displaying Multicast Group Information	3-164
Configuring Domain Name Service	3-165
Configuring General DNS Server Parameters	3-165
Configuring Static DNS Host to Address Entries	3-167
Displaying the DNS Cache	3-169
Dynamic Host Configuration Protocol	3-170
Configuring DHCP Relay Service	3-170
Configuring the DHCP Server	3-172
Enabling the Server, Setting Excluded Addresses	3-172
Configuring Address Pools	3-174
Displaying Address Bindings	3-178
Configuring Router Redundancy	3-179
Virtual Router Redundancy Protocol	3-180
Configuring VRRP Groups	3-180
Displaying VRRP Global Statistics	3-185
Displaying VRRP Group Statistics	3-186
IP Routing	3-188
Overview	3-188
Initial Configuration	3-188
IP Switching	3-189
Routing Path Management	3-190
Routing Protocols	3-190
Basic IP Interface Configuration	3-191
Configuring IP Routing Interfaces	3-192
Address Resolution Protocol	3-194

Proxy ARP	3-194
Basic ARP Configuration	3-195
Configuring Static ARP Addresses	3-196
Displaying Dynamically Learned ARP Entries	3-197
Displaying Local ARP Entries	3-198
Displaying ARP Statistics	3-199
Displaying Statistics for IP Protocols	3-200
IP Statistics	3-200
ICMP Statistics	3-202
UDP Statistics	3-204
TCP Statistics	3-205
Configuring Static Routes	3-206
Displaying the Routing Table	3-207
Configuring the Routing Information Protocol	3-208
Configuring General Protocol Settings	3-209
Specifying Network Interfaces for RIP	3-211
Configuring Network Interfaces for RIP	3-212
Displaying RIP Information and Statistics	3-215
Configuring the Open Shortest Path First Protocol	3-218
Configuring General Protocol Settings	3-219
Configuring OSPF Areas	3-222
Configuring Area Ranges (Route Summarization for ABRs)	3-225
Configuring OSPF Interfaces	3-227
Configuring Virtual Links	3-231
Configuring Network Area Addresses	3-233
Configuring Summary Addresses (for External AS Routes)	3-236
Redistributing External Routes	3-237
Configuring NSSA Settings	3-238
Displaying Link State Database Information	3-240
Displaying Information on Border Routers	3-242
Displaying Information on Neighbor Routers	3-243
Multicast Routing	3-244
Configuring Global Settings for Multicast Routing	3-244
Displaying the Multicast Routing Table	3-245
Configuring DVMRP	3-248
Configuring Global DVMRP Settings	3-248
Configuring DVMRP Interface Settings	3-251
Displaying Neighbor Information	3-253
Displaying the Routing Table	3-254
Configuring PIM-DM	3-255
Configuring Global PIM-DM Settings	3-255
Configuring PIM-DM Interface Settings	3-256
Displaying Interface Information	3-259
Displaying Neighbor Information	3-259

Chapter 4: Command Line Interface	4-1
Using the Command Line Interface	4-1
Accessing the CLI	4-1
Console Connection	4-1
Telnet Connection	4-1
Entering Commands	4-3
Keywords and Arguments	4-3
Minimum Abbreviation	4-3
Command Completion	4-3
Getting Help on Commands	4-3
Showing Commands	4-4
Partial Keyword Lookup	4-5
Negating the Effect of Commands	4-5
Using Command History	4-5
Understanding Command Modes	4-6
Exec Commands	4-6
Configuration Commands	4-7
Command Line Processing	4-9
Command Groups	4-10
Line Commands	4-11
line	4-12
login	4-12
password	4-13
timeout login response	4-14
exec-timeout	4-15
password-thresh	4-15
silent-time	4-16
databits	4-17
parity	4-17
speed	4-18
stopbits	4-18
disconnect	4-19
show line	4-19
General Commands	4-20
enable	4-20
disable	4-21
configure	4-22
show history	4-22
reload	4-23
end	4-23
exit	4-24
quit	4-24

System Management Commands	4-25
Device Designation Commands	4-25
prompt	4-25
hostname	4-26
User Access Commands	4-26
username	4-27
enable password	4-28
IP Filter Commands	4-29
management	4-29
show management	4-30
Web Server Commands	4-31
ip http port	4-31
ip http server	4-31
ip http secure-server	4-32
ip http secure-port	4-33
Telnet Server Commands	4-34
ip telnet port	4-34
ip telnet server	4-34
Secure Shell Commands	4-35
ip ssh server	4-37
ip ssh timeout	4-38
ip ssh authentication-retries	4-38
ip ssh server-key size	4-39
delete public-key	4-39
ip ssh crypto host-key generate	4-40
ip ssh crypto zeroize	4-40
ip ssh save host-key	4-41
show ip ssh	4-41
show ssh	4-42
show public-key	4-43
Event Logging Commands	4-44
logging on	4-44
logging history	4-45
logging host	4-46
logging facility	4-46
logging trap	4-47
clear logging	4-47
show logging	4-48
SMTP Alert Commands	4-49
logging sendmail host	4-50
logging sendmail level	4-50
logging sendmail source-email	4-51
logging sendmail destination-email	4-51
logging sendmail	4-52
show logging sendmail	4-52

Time Commands	4-53
ntp client	4-53
ntp server	4-54
ntp poll	4-55
show ntp	4-55
clock timezone	4-56
calendar set	4-56
show calendar	4-57
System Status Commands	4-58
show startup-config	4-58
show running-config	4-59
show system	4-61
show users	4-62
show version	4-62
Frame Size Commands	4-63
jumbo frame	4-63
Flash/File Commands	4-64
copy	4-64
delete	4-67
dir	4-67
whichboot	4-68
boot system	4-69
Authentication Commands	4-70
Authentication Sequence	4-70
authentication login	4-70
authentication enable	4-71
RADIUS Client	4-72
radius-server host	4-72
radius-server port	4-73
radius-server key	4-73
radius-server retransmit	4-74
radius-server timeout	4-74
show radius-server	4-74
TACACS+ Client	4-75
tacacs-server host	4-75
tacacs-server port	4-76
tacacs-server key	4-76
show tacacs-server	4-77
Port Security Commands	4-77
port security	4-78
802.1X Port Authentication	4-79
authentication dot1x default	4-80
dot1x default	4-80
dot1x max-req	4-80
dot1x port-control	4-81

dot1x operation-mode	4-82
dot1x re-authenticate	4-82
dot1x re-authentication	4-83
dot1x timeout quiet-period	4-83
dot1x timeout re-authperiod	4-84
dot1x timeout tx-period	4-84
show dot1x	4-85
Access Control List Commands	4-87
IP ACLs	4-88
access-list ip	4-89
permit, deny (Standard ACL)	4-90
permit, deny (Extended ACL)	4-91
show ip access-list	4-93
access-list ip mask-precedence	4-93
mask (IP ACL)	4-94
show access-list ip mask-precedence	4-97
ip access-group	4-98
show ip access-group	4-98
map access-list ip	4-99
show map access-list ip	4-100
match access-list ip	4-100
show marking	4-101
MAC ACLs	4-102
access-list mac	4-102
permit, deny (MAC ACL)	4-103
show mac access-list	4-104
access-list mac mask-precedence	4-105
mask (MAC ACL)	4-106
show access-list mac mask-precedence	4-108
mac access-group	4-108
show mac access-group	4-109
map access-list mac	4-109
show map access-list mac	4-110
match access-list mac	4-111
ACL Information	4-112
show access-list	4-112
show access-group	4-112
SNMP Commands	4-113
snmp-server	4-113
show snmp	4-114
snmp-server community	4-115
snmp-server contact	4-115
snmp-server location	4-116
snmp-server host	4-117
snmp-server enable traps	4-118

snmp-server engine-id	4-119
show snmp engine-id	4-119
snmp-server view	4-120
show snmp view	4-121
snmp-server group	4-121
show snmp group	4-123
snmp-server user	4-124
show snmp user	4-125
snmp ip filter	4-125
DHCP Commands	4-126
DHCP Client	4-127
ip dhcp client-identifier	4-127
ip dhcp restart client	4-127
DHCP Relay	4-128
ip dhcp restart relay	4-128
ip dhcp relay server	4-129
DHCP Server	4-130
service dhcp	4-130
ip dhcp excluded-address	4-131
ip dhcp pool	4-131
network	4-132
default-router	4-133
domain-name	4-133
dns-server	4-134
next-server	4-134
bootfile	4-135
netbios-name-server	4-135
netbios-node-type	4-136
lease	4-136
host	4-137
client-identifier	4-138
hardware-address	4-139
clear ip dhcp binding	4-139
show ip dhcp binding	4-140
DNS Commands	4-141
ip host	4-141
clear host	4-142
ip domain-name	4-142
ip domain-list	4-143
ip name-server	4-144
ip domain-lookup	4-145
show hosts	4-146
show dns	4-147
show dns cache	4-147
clear dns cache	4-148

Interface Commands	4-149
interface	4-149
description	4-150
speed-duplex	4-150
negotiation	4-151
capabilities	4-152
media-type	4-154
shutdown	4-154
switchport broadcast packet-rate	4-155
clear counters	4-156
show interfaces status	4-156
show interfaces counters	4-157
show interfaces switchport	4-158
Mirror Port Commands	4-160
port monitor	4-160
show port monitor	4-161
Rate Limit Commands	4-162
rate-limit	4-162
Link Aggregation Commands	4-163
channel-group	4-164
lacp	4-164
Address Table Commands	4-166
mac-address-table static	4-166
clear mac-address-table dynamic	4-167
show mac-address-table	4-167
mac-address-table aging-time	4-168
show mac-address-table aging-time	4-169
Spanning Tree Commands	4-169
spanning-tree	4-170
spanning-tree mode	4-171
spanning-tree forward-time	4-172
spanning-tree hello-time	4-173
spanning-tree max-age	4-173
spanning-tree priority	4-174
spanning-tree pathcost method	4-174
spanning-tree transmission-limit	4-175
spanning-tree mst-configuration	4-175
mst vlan	4-176
mst priority	4-177
name	4-177
revision	4-178
max-hops	4-179
spanning-tree spanning-disabled	4-179
spanning-tree cost	4-180
spanning-tree port-priority	4-180

spanning-tree edge-port	4-181
spanning-tree portfast	4-182
spanning-tree link-type	4-183
spanning-tree mst cost	4-183
spanning-tree mst port-priority	4-184
spanning-tree protocol-migration	4-185
show spanning-tree	4-186
show spanning-tree mst configuration	4-188
VLAN Commands	4-188
Editing VLAN Groups	4-189
vlan database	4-189
vlan	4-190
Configuring VLAN Interfaces	4-191
interface vlan	4-191
switchport mode	4-192
switchport acceptable-frame-types	4-192
switchport ingress-filtering	4-193
switchport native vlan	4-194
switchport allowed vlan	4-195
switchport forbidden vlan	4-196
Displaying VLAN Information	4-197
show vlan	4-197
Configuring Private VLANs	4-198
pvlan	4-198
show pvlan	4-199
Configuring Protocol-based VLANs	4-199
protocol-vlan protocol-group (Configuring Groups)	4-200
protocol-vlan protocol-group (Configuring Interfaces)	4-200
show protocol-vlan protocol-group	4-201
show interfaces protocol-vlan protocol-group	4-202
GVRP and Bridge Extension Commands	4-203
bridge-ext gvrp	4-203
show bridge-ext	4-204
switchport gvrp	4-204
show gvrp configuration	4-205
garp timer	4-205
show garp timer	4-206
Priority Commands	4-207
Priority Commands (Layer 2)	4-207
queue mode	4-208
switchport priority default	4-209
queue bandwidth	4-210
queue cos-map	4-210
show queue mode	4-211
show queue bandwidth	4-212

show queue cos-map	4-212
Priority Commands (Layer 3 and 4)	4-213
map ip port (Global Configuration)	4-213
map ip port (Interface Configuration)	4-214
map ip precedence (Global Configuration)	4-214
map ip precedence (Interface Configuration)	4-215
map ip dscp (Global Configuration)	4-216
map ip dscp (Interface Configuration)	4-216
show map ip port	4-217
show map ip precedence	4-218
show map ip dscp	4-219
Multicast Filtering Commands	4-220
IGMP Snooping Commands	4-221
ip igmp snooping	4-221
ip igmp snooping vlan static	4-221
ip igmp snooping version	4-222
show ip igmp snooping	4-222
show mac-address-table multicast	4-223
IGMP Query Commands (Layer 2)	4-224
ip igmp snooping querier	4-224
ip igmp snooping query-count	4-224
ip igmp snooping query-interval	4-225
ip igmp snooping query-max-response-time	4-226
ip igmp snooping router-port-expire-time	4-226
Static Multicast Routing Commands	4-227
ip igmp snooping vlan mrouter	4-227
show ip igmp snooping mrouter	4-228
IGMP Commands (Layer 3)	4-229
ip igmp	4-229
ip igmp robustval	4-230
ip igmp query-interval	4-230
ip igmp max-resp-interval	4-231
ip igmp last-memb-query-interval	4-232
ip igmp version	4-232
show ip igmp interface	4-233
clear ip igmp group	4-234
show ip igmp groups	4-234
IP Interface Commands	4-236
Basic IP Configuration	4-236
ip address	4-236
ip default-gateway	4-238
show ip interface	4-238
show ip redirects	4-239
ping	4-239

Address Resolution Protocol (ARP)	4-241
arp	4-241
arp-timeout	4-242
clear arp-cache	4-242
show arp	4-242
ip proxy-arp	4-243
IP Routing Commands	4-244
Global Routing Configuration	4-244
ip routing	4-244
ip route	4-245
clear ip route	4-246
show ip route	4-246
show ip host-route	4-247
show ip traffic	4-248
Routing Information Protocol (RIP)	4-248
router rip	4-249
timers basic	4-249
network	4-250
neighbor	4-251
version	4-252
ip rip receive version	4-253
ip rip send version	4-254
ip split-horizon	4-255
ip rip authentication key	4-255
ip rip authentication mode	4-256
show rip globals	4-257
show ip rip	4-257
Open Shortest Path First (OSPF)	4-259
router ospf	4-260
router-id	4-260
compatible rfc1583	4-261
default-information originate	4-262
timers spf	4-263
area range	4-264
area default-cost	4-264
summary-address	4-265
redistribute	4-266
network area	4-267
area stub	4-268
area nssa	4-269
area virtual-link	4-270
ip ospf authentication	4-272
ip ospf authentication-key	4-273
ip ospf message-digest-key	4-274
ip ospf cost	4-275

ip ospf dead-interval	4-275
ip ospf hello-interval	4-276
ip ospf priority	4-276
ip ospf retransmit-interval	4-277
ip ospf transmit-delay	4-278
show ip ospf	4-278
show ip ospf border-routers	4-279
show ip ospf database	4-280
show ip ospf interface	4-288
show ip ospf neighbor	4-289
show ip ospf summary-address	4-290
show ip ospf virtual-links	4-290
Multicast Routing Commands	4-291
Static Multicast Routing Commands	4-291
ip igmp snooping vlan mrouter	4-291
show ip igmp snooping mrouter	4-292
General Multicast Routing Commands	4-293
ip multicast-routing	4-293
show ip mroute	4-293
DVMRP Multicast Routing Commands	4-295
router dvmrp	4-295
probe-interval	4-296
nbr-timeout	4-297
report-interval	4-297
flash-update-interval	4-298
prune-lifetime	4-298
default-gateway	4-299
ip dvmrp	4-299
ip dvmrp metric	4-300
clear ip dvmrp route	4-301
show router dvmrp	4-301
show ip dvmrp route	4-302
show ip dvmrp neighbor	4-303
show ip dvmrp interface	4-303
PIM-DM Multicast Routing Commands	4-304
router pim	4-304
ip pim dense-mode	4-305
ip pim hello-interval	4-306
ip pim hello-holdtime	4-306
ip pim trigger-hello-interval	4-307
ip pim join-prune-holdtime	4-307
ip pim graft-retry-interval	4-308
ip pim max-graft-retries	4-309
show router pim	4-309
show ip pim interface	4-309

show ip pim neighbor	4-310
Router Redundancy Commands	4-311
Virtual Router Redundancy Protocol Commands	4-311
vrrp ip	4-312
vrrp authentication	4-313
vrrp priority	4-313
vrrp timers advertise	4-314
vrrp preempt	4-315
show vrrp	4-316
show vrrp interface	4-318
show vrrp router counters	4-318
show vrrp interface counters	4-319
clear vrrp router counters	4-319
clear vrrp interface counters	4-319

Appendix A: Software Specifications	A-1
Software Features	A-1
Management Features	A-2
Standards	A-2
Management Information Bases	A-3

Appendix B: Troubleshooting	B-1
Problems Accessing the Management Interface	B-1
Using System Logs	B-2

Glossary

Index

Tables

Table 1-1	Key Features	1-1
Table 1-2	System Defaults	1-6
Table 3-1	Web Page Configuration Buttons	3-3
Table 3-2	Switch Main Menu	3-4
Table 3-3	Logging Levels	3-29
Table 3-4	SNMPv3 Security Models and Levels	3-35
Table 3-5	HTTPS System Support	3-49
Table 3-6	802.1X Statistics	3-62
Table 3-7	LACP Port Counters	3-90
Table 3-8	LACP Internal Configuration Information	3-91
Table 3-9	LACP Neighbor Configuration Information	3-93
Table 3-10	Port Statistics	3-98
Table 3-11	Mapping CoS Values to Egress Queues	3-141
Table 3-12	CoS Priority Levels	3-141
Table 3-13	Mapping IP Precedence	3-146
Table 3-14	Mapping DSCP Priority	3-147
Table 3-15	Mapping CoS Values to IP ACLs	3-150
Table 3-16	Address Resolution Protocol	3-194
Table 3-17	ARP Statistics	3-199
Table 3-18	IP Statistics	3-200
Table 3-19	ICMP Statistics	3-202
Table 3-20	UDP Statistics	3-204
Table 3-21	TCP Statistics	3-205
Table 3-22	RIP Information and Statistics	3-215
Table 4-1	General Command Modes	4-6
Table 4-2	Configuration Command Modes	4-8
Table 4-3	Keystroke Commands	4-9
Table 4-4	Command Group Index	4-10
Table 4-5	Line Commands	4-11
Table 4-6	General Commands	4-20
Table 4-7	System Management Commands	4-25
Table 4-8	Device Designation Commands	4-25
Table 4-9	User Access Commands	4-26
Table 4-10	Default Login Settings	4-27
Table 4-11	IP Filter Commands	4-29
Table 4-12	Web Server Commands	4-31
Table 4-13	HTTPS System Support	4-32
Table 4-14	Secure Shell Commands	4-35
Table 4-15	show ssh - display description	4-42
Table 4-16	Event Logging Commands	4-44
Table 4-17	Logging Levels	4-45

Table 4-18	show logging flash - display description	4-48
Table 4-19	show logging trap - display description	4-49
Table 4-20	SMTP Alert Commands	4-49
Table 4-21	Time Commands	4-53
Table 4-22	System Status Commands	4-58
Table 4-23	Frame Size Commands	4-63
Table 4-24	Flash/File Commands	4-64
Table 4-25	File Directory Information	4-68
Table 4-26	Authentication Commands	4-70
Table 4-27	Authentication Sequence Commands	4-70
Table 4-28	RADIUS Client Commands	4-72
Table 4-29	TACACS+ Client Commands	4-75
Table 4-30	Port Security Commands	4-77
Table 4-31	802.1X Port Authentication Commands	4-79
Table 4-32	Access Control List Commands	4-88
Table 4-33	IP ACL Commands	4-88
Table 4-34	Mapping CoS Values to IP ACLs	4-99
Table 4-35	MAC ACL Commands	4-102
Table 4-36	Mapping CoS Values to MAC ACLs	4-109
Table 4-37	ACL Information Commands	4-112
Table 4-38	SNMP Commands	4-113
Table 4-39	show snmp engine-id - display description	4-120
Table 4-40	show snmp view - display description	4-121
Table 4-41	show snmp group - display description	4-124
Table 4-42	show snmp user - display description	4-125
Table 4-43	DHCP Commands	4-126
Table 4-44	DHCP Client Commands	4-127
Table 4-45	DHCP Relay Commands	4-128
Table 4-46	DHCP Server Commands	4-130
Table 4-47	DNS Commands	4-141
Table 4-48	show dns cache - display description	4-147
Table 4-49	Interface Commands	4-149
Table 4-50	show interfaces switchport - display description	4-159
Table 4-51	Mirror Port Commands	4-160
Table 4-52	Rate Limit Commands	4-162
Table 4-53	Link Aggregation Commands	4-163
Table 4-54	Address Table Commands	4-166
Table 4-55	Spanning Tree Commands	4-169
Table 4-56	VLAN Commands	4-188
Table 4-57	Commands for Editing VLAN Groups	4-189
Table 4-58	Commands for Configuring VLAN Interfaces	4-191
Table 4-59	Commands for Displaying VLAN Information	4-197
Table 4-60	Private VLAN Commands	4-198
Table 4-61	Protocol-based VLAN Commands	4-199
Table 4-62	GVRP and Bridge Extension Commands	4-203

Table 4-63	Priority Commands	4-207
Table 4-64	Priority Commands (Layer 2)	4-207
Table 4-65	Default CoS Priority Levels	4-211
Table 4-66	Priority Commands (Layer 3 and 4)	4-213
Table 4-67	Mapping IP Precedence to CoS Values	4-215
Table 4-68	Mapping IP DSCP to CoS Values	4-217
Table 4-69	Multicast Filtering Commands	4-220
Table 4-70	IGMP Snooping Commands	4-221
Table 4-71	IGMP Query Commands (Layer 2)	4-224
Table 4-72	Static Multicast Routing Commands	4-227
Table 4-73	IGMP Commands (Layer 3)	4-229
Table 4-74	show ip igmp groups - display description	4-235
Table 4-75	IP Interface Commands	4-236
Table 4-76	Basic IP Configuration Commands	4-236
Table 4-77	Address Resolution Protocol Commands	4-241
Table 4-78	IP Routing Commands	4-244
Table 4-79	Global Routing Configuration Commands	4-244
Table 4-80	show ip route - display description	4-247
Table 4-81	show ip host-route - display description	4-247
Table 4-82	Routing Information Protocol Commands	4-248
Table 4-83	show rip globals - display description	4-257
Table 4-84	show ip rip - display description	4-258
Table 4-85	Open Shortest Path First Commands	4-259
Table 4-87	show ip ospf border-routers - display description	4-279
Table 4-86	show ip ospf - display description	4-279
Table 4-88	show ip ospf database - display description	4-281
Table 4-89	show ip ospf asbr-summary - display description	4-282
Table 4-90	show ip ospf database-summary - display description	4-283
Table 4-91	show ip ospf external - display description	4-284
Table 4-92	show ip ospf network - display description	4-285
Table 4-93	show ip ospf router - display description	4-286
Table 4-94	show ip ospf summary - display description	4-287
Table 4-95	show ip ospf interface - display description	4-288
Table 4-96	show ip ospf neighbor - display description	4-289
Table 4-97	show ip ospf virtual-links - display description	4-290
Table 4-98	Multicast Routing Commands	4-291
Table 4-99	Static Multicast Routing Commands	4-291
Table 4-100	General Multicast Routing Commands	4-293
Table 4-101	show ip mroute - display description	4-294
Table 4-102	DVMRP Multicast Routing Commands	4-295
Table 4-103	show ip dvmrp route - display description	4-302
Table 4-104	show ip dvmrp neighbor - display description	4-303
Table 4-105	PIM-DM Multicast Routing Commands	4-304
Table 4-106	show ip pim neighbor - display description	4-310
Table 4-107	Router Redundancy Commands	4-311

Tables

Table 4-108	VRRP Commands	4-311
Table 4-110	show vrrp brief - display description	4-317
Table 4-109	show vrrp - display description	4-317
Table B-1	Troubleshooting Chart	B-1

Figures

Figure 3-1	Home Page	3-2
Figure 3-2	Front Panel Indicators	3-3
Figure 3-3	System Information	3-11
Figure 3-4	Switch Information	3-13
Figure 3-5	Bridge Extension Configuration	3-14
Figure 3-6	IP Interface Configuration - Manual	3-16
Figure 3-7	Default Gateway	3-17
Figure 3-8	IP Interface Configuration - DHCP	3-18
Figure 3-9	Copy Firmware	3-20
Figure 3-10	Setting the Startup Code	3-20
Figure 3-11	Deleting Files	3-21
Figure 3-12	Downloading Configuration Settings for Start-Up	3-23
Figure 3-13	Setting the Startup Configuration Settings	3-23
Figure 3-14	Configuring the Console Port	3-25
Figure 3-15	Configuring the Telnet Interface	3-27
Figure 3-16	System Logs	3-29
Figure 3-17	Remote Logs	3-31
Figure 3-18	Displaying Logs	3-32
Figure 3-19	Resetting the System	3-32
Figure 3-20	SNTP Configuration	3-33
Figure 3-21	Clock Time Zone	3-34
Figure 3-22	Enabling the SNMP Agent	3-36
Figure 3-23	Configuring SNMP Community Strings	3-37
Figure 3-24	Configuring SNMP Trap Managers	3-38
Figure 3-25	Setting the SNMPv3 Engine ID	3-39
Figure 3-26	Configuring SNMPv3 Users	3-40
Figure 3-27	Configuring SNMPv3 Groups	3-42
Figure 3-28	Configuring SNMPv3 Views	3-43
Figure 3-29	User Accounts	3-45
Figure 3-30	Authentication Server Settings	3-47
Figure 3-31	HTTPS Settings	3-49
Figure 3-32	SSH Host-Key Settings	3-53
Figure 3-33	SSH Server Settings	3-54
Figure 3-34	Port Security	3-56
Figure 3-35	802.1X Information	3-59
Figure 3-36	802.1X Configuration	3-61
Figure 3-37	802.1X Port Configuration	3-62
Figure 3-38	802.1X Statistics	3-63
Figure 3-39	IP Filter	3-65
Figure 3-40	Selecting ACL Type	3-67
Figure 3-41	ACL Configuration - Standard IP	3-68

Figure 3-42	ACL Configuration - Extended IP	3-70
Figure 3-43	ACL Configuration - MAC	3-72
Figure 3-44	Selecting ACL Mask Types	3-73
Figure 3-45	ACL Mask Configuration - IP	3-75
Figure 3-46	ACL Mask Configuration - MAC	3-76
Figure 3-47	ACL Port Binding	3-78
Figure 3-48	Port - Port Information	3-79
Figure 3-49	Port - Port Configuration	3-82
Figure 3-50	Static Trunk Configuration	3-85
Figure 3-51	LACP Trunk Configuration	3-87
Figure 3-52	LACP - Aggregation Port	3-89
Figure 3-53	LACP - Port Counters Information	3-90
Figure 3-54	LACP - Port Internal Information	3-92
Figure 3-55	LACP - Port Neighbors Information	3-93
Figure 3-56	Port Broadcast Control	3-94
Figure 3-57	Mirror Port Configuration	3-96
Figure 3-58	Rate Limit Configuration	3-97
Figure 3-59	Port Statistics	3-101
Figure 3-60	Static Addresses	3-103
Figure 3-61	Dynamic Addresses	3-104
Figure 3-62	Address Aging	3-105
Figure 3-63	STA Information	3-108
Figure 3-64	STA Global Configuration	3-112
Figure 3-65	STA Port Information	3-115
Figure 3-66	STA Port Configuration	3-118
Figure 3-67	MSTP VLAN Configuration	3-119
Figure 3-68	MSTP Port Information	3-121
Figure 3-69	MSTP Port Configuration	3-123
Figure 3-70	Globally Enabling GVRP	3-127
Figure 3-71	VLAN Basic Information	3-127
Figure 3-72	VLAN Current Table	3-128
Figure 3-73	VLAN Static List - Creating VLANs	3-130
Figure 3-74	VLAN Static Table - Adding Static Members	3-131
Figure 3-75	VLAN Static Membership by Port	3-132
Figure 3-76	VLAN Port Configuration	3-134
Figure 3-77	Private VLAN Status	3-135
Figure 3-78	Private VLAN Link Status	3-136
Figure 3-79	Protocol VLAN Configuration	3-137
Figure 3-80	Protocol VLAN Port Configuration	3-138
Figure 3-81	Default Port Priority	3-140
Figure 3-82	Traffic Classes	3-142
Figure 3-83	Queue Mode	3-143
Figure 3-84	Queue Scheduling	3-144
Figure 3-85	IP Precedence/DSCP Priority Status	3-145
Figure 3-86	IP Precedence Priority	3-146

Figure 3-87	IP DSCP Priority	3-148
Figure 3-88	IP Port Priority Status	3-149
Figure 3-89	IP Port Priority	3-149
Figure 3-90	ACL CoS Priority	3-151
Figure 3-91	ACL Marker	3-152
Figure 3-92	IGMP Configuration	3-156
Figure 3-93	Multicast Router Port Information	3-157
Figure 3-94	Static Multicast Router Port Configuration	3-158
Figure 3-95	IP Multicast Registration Table	3-159
Figure 3-96	IGMP Member Port Table	3-160
Figure 3-97	IGMP Interface Settings	3-163
Figure 3-98	IGMP Group Membership	3-164
Figure 3-99	DNS General Configuration	3-166
Figure 3-100	DNS Static Host Table	3-168
Figure 3-101	DNS Cache	3-169
Figure 3-102	DHCP Relay Configuration	3-171
Figure 3-103	DHCP Server General Configuration	3-173
Figure 3-104	DHCP Server Pool Configuration	3-175
Figure 3-105	DHCP Server Pool - Network Configuration	3-176
Figure 3-106	DHCP Server Pool - Host Configuration	3-177
Figure 3-107	DHCP Server - IP Binding	3-178
Figure 3-108	VRRP Group Configuration	3-183
Figure 3-109	VRRP Group Configuration Detail	3-184
Figure 3-110	VRRP Global Statistics	3-185
Figure 3-111	VRRP Group Statistics	3-187
Figure 3-112	IP Global Settings	3-191
Figure 3-113	IP Routing Interface	3-193
Figure 3-114	ARP General	3-195
Figure 3-115	ARP Static Addresses	3-196
Figure 3-116	ARP Dynamic Addresses	3-197
Figure 3-117	ARP Other Addresses	3-198
Figure 3-118	ARP Statistics	3-199
Figure 3-119	IP Statistics	3-202
Figure 3-120	ICMP Statistics	3-203
Figure 3-121	UDP Statistics	3-204
Figure 3-122	TCP Statistics	3-205
Figure 3-123	IP Static Routes	3-206
Figure 3-124	IP Routing Table	3-207
Figure 3-125	RIP General Settings	3-210
Figure 3-126	RIP Network Addresses	3-211
Figure 3-127	RIP Interface Settings	3-214
Figure 3-128	RIP Statistics	3-216
Figure 3-129	OSPF General Configuration	3-221
Figure 3-130	OSPF Area Configuration	3-224
Figure 3-131	OSPF Range Configuration	3-226

Figure 3-132	OSPF Interface Configuration	3-229
Figure 3-133	OSPF Interface Configuration - Detailed	3-230
Figure 3-134	OSPF Virtual Link Configuration	3-232
Figure 3-135	OSPF Network Area Address Configuration	3-234
Figure 3-136	OSPF Summary Address Configuration	3-236
Figure 3-137	OSPF Redistribute Configuration	3-238
Figure 3-138	OSPF NSSA Settings	3-239
Figure 3-139	OSPF Link State Database Information	3-241
Figure 3-140	OSPF Border Router Information	3-242
Figure 3-141	OSPF Neighbor Information	3-243
Figure 3-142	Multicast Routing General Settings	3-244
Figure 3-143	Multicast Routing Table	3-246
Figure 3-144	DVMRP General Settings	3-251
Figure 3-145	DVMRP Interface Settings	3-252
Figure 3-146	DVMRP Neighbor Information	3-253
Figure 3-147	DVMRP Routing Table	3-254
Figure 3-148	PIM-DM General Settings	3-256
Figure 3-149	PIM-DM Interface Settings	3-258
Figure 3-150	PIM-DM Interface Information	3-259
Figure 3-151	PIM-DM Neighbor Information	3-260

Chapter 1: Introduction

This switch provides a broad range of features for Layer 2 switching and Layer 3 routing. It includes a management agent that allows you to configure the features listed in this manual. The default configuration can be used for most of the features provided by this switch. However, there are many options that you should configure to maximize the switch's performance for your particular network environment.

Key Features

Table 1-1 Key Features

Feature	Description
Configuration Backup and Restore	Backup to TFTP server
Authentication	Console, Telnet, web – User name / password, RADIUS, TACACS+ Web – HTTPS; Telnet – SSH SNMP v1/2c - Community strings SNMP version 3 – MD5 or SHA password Port – IEEE 802.1X, MAC address filtering
Access Control Lists	Supports up to 32 IP or MAC ACLs
DHCP Client, Relay and Server	Supported
DNS Server	Supported
Port Configuration	Speed, duplex mode and flow control
Rate Limiting	Input and output rate limiting per port
Port Mirroring	One or more ports mirrored to single analysis port
Port Trunking	Supports up to 6 trunks using either static or dynamic trunking (LACP)
Broadcast Storm Control	Supported
Address Table	Up to 16K MAC addresses in the forwarding table, 1024 static MAC addresses; Up to 4K IP entries in ARP cache, 2045 IP entries in routing table, 256 static IP routes, 255 IP interfaces; 1024 multicast groups
IEEE 802.1D Bridge	Supports dynamic data switching and addresses learning
Store-and-Forward Switching	Supported to ensure wire-speed switching while eliminating bad frames
Spanning Tree Protocol	Supports standard STP, Rapid Spanning Tree Protocol (RSTP), and Multiple Spanning Trees (MSTP)
Virtual LANs	Up to 255 using IEEE 802.1Q, port-based, protocol-based, or private VLANs
Traffic Prioritization	Default port priority, traffic class map, queue scheduling, IP Precedence, or Differentiated Services Code Point (DSCP), and TCP/UDP Port

Table 1-1 Key Features (Continued)

Feature	Description
Router Redundancy	Router backup is provided with the Virtual Router Redundancy Protocol (VRRP)
IP Routing	Routing Information Protocol (RIP), Open Shortest Path First (OSPF), static routes
ARP	Static and dynamic address configuration, proxy ARP
Multicast Filtering	Supports IGMP snooping and query for Layer 2, and IGMP for Layer 3
Multicast Routing	Supports DVMRP and PIM-DM

Description of Software Features

The switch provides a wide range of advanced performance enhancing features. Flow control eliminates the loss of packets due to bottlenecks caused by port saturation. Broadcast storm suppression prevents broadcast traffic storms from engulfing the network. Untagged (port-based), tagged, and protocol-based VLANs, plus support for automatic GVRP VLAN registration provide traffic security and efficient use of network bandwidth. CoS priority queueing ensures the minimum delay for moving real-time multimedia data across the network. While multicast filtering and routing provides support for real-time network applications. Some of the management features are briefly described below.

Configuration Backup and Restore – You can save the current configuration settings to a file on a TFTP server, and later download this file to restore the switch configuration settings.

Authentication – This switch authenticates management access via the console port, Telnet or web browser. User names and passwords can be configured locally or can be verified via a remote authentication server (i.e., RADIUS or TACACS+). Port-based authentication is also supported via the IEEE 802.1x protocol. This protocol uses Extensible Authentication Protocol over LANs (EAPOL) to request user credentials from the 802.1x client, and then uses the EAP between the switch and the authentication server to verify the client’s right to access the network via an authentication server (i.e., RADIUS server).

Other authentication options include HTTPS for secure management access via the web, SSH for secure management access over a Telnet-equivalent connection, SNMP Version 3, IP address filtering for SNMP/web/Telnet management access, and MAC address filtering for port access.

Access Control Lists – ACLs provide packet filtering for IP frames (based on address, protocol, TCP/UDP port number or TCP control code) or any frames (based on MAC address or Ethernet type). ACLs can be used to improve performance by blocking unnecessary network traffic or to implement security controls by restricting access to specific network resources or protocols.

DHCP Server and DHCP Relay – A DHCP server is provided to assign IP addresses to host devices. Since DHCP uses a broadcast mechanism, a DHCP server and its client must physically reside on the same subnet. Since it is not practical to have a DHCP server on every subnet, DHCP Relay is also supported to allow dynamic configuration of local clients from a DHCP server located in a different network.

Port Configuration – You can manually configure the speed, duplex mode, and flow control used on specific ports, or use auto-negotiation to detect the connection settings used by the attached device. Use the full-duplex mode on ports whenever possible to double the throughput of switch connections. Flow control should also be enabled to control network traffic during periods of congestion and prevent the loss of packets when port buffer thresholds are exceeded. The switch supports flow control based on the IEEE 802.3x standard.

Rate Limiting – This feature controls the maximum rate for traffic transmitted or received on an interface. Rate limiting is configured on interfaces at the edge of a network to limit traffic into or out of the network. Traffic that falls within the rate limit is transmitted, while packets that exceed the acceptable amount of traffic are dropped.

Port Mirroring – The switch can unobtrusively mirror traffic from any port to a monitor port. You can then attach a protocol analyzer or RMON probe to this port to perform traffic analysis and verify connection integrity.

Port Trunking – Ports can be combined into an aggregate connection. Trunks can be manually set up or dynamically configured using IEEE 802.3-2002 (formerly IEEE 802.3ad) Link Aggregation Control Protocol (LACP). The additional ports dramatically increase the throughput across any connection, and provide redundancy by taking over the load if a port in the trunk should fail. The switch supports up to 6 trunks.

Broadcast Storm Control – Broadcast suppression prevents broadcast traffic from overwhelming the network. When enabled on a port, the level of broadcast traffic passing through the port is restricted. If broadcast traffic rises above a pre-defined threshold, it will be throttled until the level falls back beneath the threshold.

Static Addresses – A static address can be assigned to a specific interface on this switch. Static addresses are bound to the assigned interface and will not be moved. When a static address is seen on another interface, the address will be ignored and will not be written to the address table. Static addresses can be used to provide network security by restricting access for a known host to a specific port.

IEEE 802.1D Bridge – The switch supports IEEE 802.1D transparent bridging. The address table facilitates data switching by learning addresses, and then filtering or forwarding traffic based on this information. The address table supports up to 16K addresses.

Store-and-Forward Switching – The switch copies each frame into its memory before forwarding them to another port. This ensures that all frames are a standard Ethernet size and have been verified for accuracy with the cyclic redundancy check (CRC). This prevents bad frames from entering the network and wasting bandwidth.

To avoid dropping frames on congested ports, the switch provides 1 MB for frame buffering. This buffer can queue packets awaiting transmission on congested networks.

Spanning Tree Algorithm – The switch supports these spanning tree protocols:

Spanning Tree Protocol (STP, IEEE 802.1D) – This protocol provides loop detection and recovery by allowing two or more redundant connections to be created between a pair of LAN segments. When there are multiple physical paths between segments, this protocol will choose a single path and disable all others to ensure that only one route exists between any two stations on the network. This prevents the creation of network loops. However, if the chosen path should fail for any reason, an alternate path will be activated to maintain the connection.

Rapid Spanning Tree Protocol (RSTP, IEEE 802.1w) – This protocol reduces the convergence time for network topology changes to about 3 to 5 seconds, compared to 30 seconds or more for the older IEEE 802.1D STP standard. It is intended as a complete replacement for STP, but can still interoperate with switches running the older standard by automatically reconfiguring ports to STP-compliant mode if they detect STP protocol messages from attached devices.

Multiple Spanning Tree Protocol (MSTP, IEEE 802.1s) – This protocol is a direct extension of RSTP. It can provide an independent spanning tree for different VLANs. It simplifies network management, provides for even faster convergence than RSTP by limiting the size of each region, and prevents VLAN members from being segmented from the rest of the group (as sometimes occurs with IEEE 802.1D STP).

Virtual LANs – The switch supports up to 255 VLANs. A Virtual LAN is a collection of network nodes that share the same collision domain regardless of their physical location or connection point in the network. The switch supports tagged VLANs based on the IEEE 802.1Q standard. Members of VLAN groups can be dynamically learned via GVRP, or ports can be manually assigned to a specific set of VLANs. This allows the switch to restrict traffic to the VLAN groups to which a user has been assigned. By segmenting your network into VLANs, you can:

- Eliminate broadcast storms which severely degrade performance in a flat network.
- Simplify network management for node changes/moves by remotely configuring VLAN membership for any port, rather than having to manually change the network connection.
- Provide data security by restricting all traffic to the originating VLAN, except where a connection is explicitly defined via the switch's routing service.
- Use private VLANs to restrict traffic to pass only between data ports and the uplink ports, thereby isolating adjacent ports within the same VLAN, and allowing you to limit the total number of VLANs that need to be configured.
- Use protocol VLANs to restrict traffic to specified interfaces based on protocol type.

Traffic Prioritization – This switch prioritizes each packet based on the required level of service, using eight priority queues with strict or Weighted Round Robin Queuing. It uses IEEE 802.1p and 802.1Q tags to prioritize incoming traffic based on input from the end-station application. These functions can be used to provide independent priorities for delay-sensitive data and best-effort data.

This switch also supports several common methods of prioritizing layer 3/4 traffic to meet application requirements. Traffic can be prioritized based on the priority bits in the IP frame's Type of Service (ToS) octet or the number of the TCP/UDP port. When these services are enabled, the priorities are mapped to a Class of Service value by the switch, and the traffic then sent to the corresponding output queue.

IP Routing – The switch provides Layer 3 IP routing. To maintain a high rate of throughput, the switch forwards all traffic passing within the same segment, and routes only traffic that passes between different subnetworks. The wire-speed routing provided by this switch lets you easily link network segments or VLANs together without having to deal with the bottlenecks or configuration hassles normally associated with conventional routers.

Routing for unicast traffic is supported with the Routing Information Protocol (RIP) and the Open Shortest Path First (OSPF) protocol.

RIP – This protocol uses a distance-vector approach to routing. Routes are determined on the basis of minimizing the distance vector, or hop count, which serves as a rough estimate of transmission cost.

OSPF – This approach uses a link state routing protocol to generate a shortest-path tree, then builds up its routing table based on this tree. OSPF produces a more stable network because the participating routers act on network changes predictably and simultaneously, converging on the best route more quickly than RIP.

Router Redundancy – Virtual Router Redundancy Protocol (VRRP) uses a virtual IP address to support a primary router and multiple backup routers. The backups can be configured to take over the workload if the master fails or to load share the traffic. The primary goal of this protocol is to allow a host device which has been configured with a fixed gateway to maintain network connectivity in case the primary gateway goes down.

Address Resolution Protocol – The switch uses ARP and Proxy ARP to convert between IP addresses and MAC (i.e., hardware) addresses. This switch supports conventional ARP, which locates the MAC address corresponding to a given IP address. This allows the switch to use IP addresses for routing decisions and the corresponding MAC addresses to forward packets from one hop to the next. You can configure either static or dynamic entries in the ARP cache.

Proxy ARP allows hosts that do not support routing to determine the MAC address of a device on another network or subnet. When a host sends an ARP request for a remote network, the switch checks to see if it has the best route. If it does, it sends its own MAC address to the host. The host then sends traffic for the remote destination via the switch, which uses its own routing table to reach the destination on the other network.

Multicast Filtering – Specific multicast traffic can be assigned to its own VLAN to ensure that it does not interfere with normal network traffic and to guarantee real-time delivery by setting the required priority level for the designated VLAN. The switch uses IGMP Snooping and Query at Layer 2 and IGMP at Layer 3 to manage multicast group registration.

Multicast Routing – Routing for multicast packets is supported by the Distance Vector Multicast Routing Protocol (DVMRP) and Protocol-Independent Multicasting - Dense Mode (PIM-DM). These protocols work in conjunction with IGMP to filter and route multicast traffic. DVMRP is a more comprehensive implementation that maintains its own routing table, but is gradually being replaced by most network managers with PIM, Dense Mode and Sparse Mode. PIM is a very simple protocol that uses the routing table of the unicast routing protocol enabled on an interface. Dense Mode is designed for areas where the probability of multicast clients is relatively high, and the overhead of frequent flooding is justified. While Sparse mode is designed for network areas, such as the Wide Area Network, where the probability of multicast clients is low. This switch currently supports DVMRP and PIM-DM.

System Defaults

The switch's system defaults are provided in the configuration file "Factory_Default_Config.cfg." To reset the switch defaults, this file should be set as the startup configuration file (page 3-23).

The following table lists some of the basic system defaults.

Table 1-2 System Defaults

Function	Parameter	Default
Console Port Connection	Baud Rate	Auto
	Data bits	8
	Stop bits	1
	Parity	none
	Local Console Timeout	0 (disabled)
Authentication	Privileged Exec Level	Username "admin" Password "admin"
	Normal Exec Level	Username "guest" Password "guest"
	Enable Privileged Exec from Normal Exec Level	Password "super"
	RADIUS Authentication	Disabled
	TACACS Authentication	Disabled
	802.1X Port Authentication	Disabled
	HTTPS	Enabled
	SSH	Disabled
	Port Security	Disabled
	IP Filtering	Disabled

Table 1-2 System Defaults (Continued)

Function	Parameter	Default
Web Management	HTTP Server	Enabled
	HTTP Port Number	80
	HTTP Secure Server	Enabled
	HTTP Secure Port Number	443
SNMP	Community Strings	"public" (read only) "private" (read/write)
	Traps	Authentication traps: enabled Link-up-down events: enabled
	SNMP V3	View: defaultview Group: public (read only), private (read/write)
Port Configuration	Admin Status	Enabled
	Auto-negotiation	Enabled
	Flow Control	Disabled
Rate Limiting	Input and output limits	Disabled
Port Trunking	Static Trunks	None
	LACP (all ports)	Disabled
Broadcast Storm Protection	Status	Enabled (all ports)
	Broadcast Limit Rate	500 packets per second
Spanning Tree Protocol	Status	Enabled, MSTP (Defaults: All values based on IEEE 802.1s)
	Fast Forwarding (Edge Port)	Disabled
Address Table	Aging Time	300 seconds
Virtual LANs	Default VLAN	1
	PVID	1
	Acceptable Frame Type	All
	Ingress Filtering	Disabled
	Switchport Mode (Egress Mode)	Hybrid: tagged/untagged frames
	GVRP (global)	Disabled
	GVRP (port interface)	Disabled

Table 1-2 System Defaults (Continued)

Function	Parameter	Default
Traffic Prioritization	Ingress Port Priority	0
	Weighted Round Robin	Queue: 0 1 2 3 4 5 6 7 Weight: 1 2 4 6 8 10 12 14
	IP Precedence Priority	Disabled
	IP DSCP Priority	Disabled
	IP Port Priority	Disabled
IP Settings	Management. VLAN	Any VLAN configured with an IP address
	IP Address	0.0.0.0
	Subnet Mask	255.0.0.0
	Default Gateway	0.0.0.0
	DHCP	Client: Enabled Relay: Disabled Server: Disabled
	DNS	Server: Disabled
	BOOTP	Disabled
Unicast Routing	ARP	Enabled Cache Timeout: 20 minutes Proxy: Disabled
	RIP	Disabled
Router Redundancy	OSPF	Disabled
	VRRP	Disabled
Multicast Filtering	IGMP Snooping (Layer 2)	Snooping: Enabled Querier: Disabled
	IGMP (Layer 3)	Disabled
Multicast Routing	DVMRP	Disabled
	PIM-DM	Disabled
System Log	Status	Enabled
	Messages Logged	Levels 0-7 (all)
	Messages Logged to Flash	Levels 0-3
SMTP Email Alerts	Event Handler	Disabled
SNTP	Clock Synchronization	Disabled

Chapter 2: Initial Configuration

Connecting to the Switch

Configuration Options

The switch includes a built-in network management agent. The agent offers a variety of management options, including SNMP, RMON and a web-based interface. A PC may also be connected directly to the switch for configuration and monitoring via a command line interface (CLI).

Note: The IP address for this switch is obtained via DHCP by default. To change this address, see “Setting an IP Address” on page 2-4.

The switch’s HTTP web agent allows you to configure switch parameters, monitor port connections, and display statistics using a standard web browser such as Netscape Navigator version 6.2 and higher or Microsoft IE version 5.0 and higher. The switch’s web management interface can be accessed from any computer attached to the network.

The CLI program can be accessed by a direct connection to the RS-232 serial console port on the switch, or remotely by a Telnet connection over the network.

The switch’s management agent also supports SNMP (Simple Network Management Protocol). This SNMP agent permits the switch to be managed from any system in the network using network management software such as HP OpenView.

The switch’s web interface, CLI configuration program, and SNMP agent allow you to perform the following management functions:

- Set user names and passwords
- Set an IP interface for any VLAN
- Configure SNMP parameters
- Enable/disable any port
- Set the speed/duplex mode for any port
- Configure the bandwidth of any port by limiting input or output rates
- Control port access through IEEE 802.1X security or static address filtering
- Filter packets using Access Control Lists (ACLs)
- Configure up to 255 IEEE 802.1Q VLANs
- Enable GVRP automatic VLAN registration
- Configure IP routing for unicast or multicast traffic
- Configure router redundancy
- Configure IGMP multicast filtering
- Upload and download system firmware via TFTP
- Upload and download switch configuration files via TFTP

- Configure Spanning Tree parameters
- Configure Class of Service (CoS) priority queuing
- Configure up to 6 static or LACP trunks
- Enable port mirroring
- Set broadcast storm control on any port
- Display system information and statistics

Required Connections

The switch provides an RS-232 serial port that enables a connection to a PC or terminal for monitoring and configuring the switch. A null-modem console cable is provided with the switch.

Attach a VT100-compatible terminal, or a PC running a terminal emulation program to the switch. You can use the console cable provided with this package, or use a null-modem cable that complies with the wiring assignments shown in the Installation Guide.

To connect a terminal to the console port, complete the following steps:

1. Connect the console cable to the serial port on a terminal, or a PC running terminal emulation software, and tighten the captive retaining screws on the DB-9 connector.
2. Connect the other end of the cable to the RS-232 serial port on the switch.
3. Make sure the terminal emulation software is set as follows:
 - Select the appropriate serial port (COM port 1 or COM port 2).
 - Set to the baud rate to 9600 bps.
 - Set the data format to 8 data bits, 1 stop bit, and no parity.
 - Set flow control to none.
 - Set the emulation mode to VT100.
 - When using HyperTerminal, select Terminal keys, not Windows keys.

- Notes:**
1. When using HyperTerminal with Microsoft® Windows® 2000, make sure that you have Windows 2000 Service Pack 2 or later installed. Windows 2000 Service Pack 2 fixes the problem of arrow keys not functioning in HyperTerminal's VT100 emulation. See www.microsoft.com for information on Windows 2000 service packs.
 2. Refer to "Line Commands" on page 4-11 for a complete description of console configuration options.
 3. Once you have set up the terminal correctly, the console login screen will be displayed.

For a description of how to use the CLI, see "Using the Command Line Interface" on page 4-1. For a list of all the CLI commands and detailed information on using the CLI, refer to "Command Groups" on page 4-10.

Remote Connections

Prior to accessing the switch's onboard agent via a network connection, you must first configure it with a valid IP address, subnet mask, and default gateway using a console connection, DHCP or BOOTP protocol.

The IP address for this switch is obtained via DHCP by default. To manually configure this address or enable dynamic address assignment via DHCP or BOOTP, see "Setting an IP Address" on page 2-4.

- Notes:**
1. This switch supports four concurrent Telnet/SSH sessions.
 2. Each VLAN group can be assigned its own IP interface address (page 2-4). You can manage the switch via any of these addresses.

After configuring the switch's IP parameters, you can access the onboard configuration program from anywhere within the attached network. The onboard configuration program can be accessed using Telnet from any computer attached to the network. The switch can also be managed by any computer using a web browser (Internet Explorer 5.0 or above, or Netscape Navigator 6.2 or above), or from a network computer using SNMP network management software.

Note: The onboard program only provides access to basic configuration functions. To access the full range of SNMP management functions, you must use SNMP-based network management software.

Basic Configuration

Console Connection

The CLI program provides two different command levels — normal access level (Normal Exec) and privileged access level (Privileged Exec). The commands available at the Normal Exec level are a limited subset of those available at the Privileged Exec level and allow you to only display information and use basic utilities. To fully configure the switch parameters, you must access the CLI at the Privileged Exec level.

Access to both CLI levels are controlled by user names and passwords. The switch has a default user name and password for each level. To log into the CLI at the Privileged Exec level using the default user name and password, perform these steps:

1. To initiate your console connection, press <Enter>. The "User Access Verification" procedure starts.
2. At the Username prompt, enter "admin."
3. At the Password prompt, also enter "admin." (The password characters are not displayed on the console screen.)
4. The session is opened and the CLI displays the "Console#" prompt indicating you have access at the Privileged Exec level.

Setting Passwords

Note: If this is your first time to log into the CLI program, you should define new passwords for both default user names using the “username” command, record them and put them in a safe place.

Passwords can consist of up to 8 alphanumeric characters and are case sensitive. To prevent unauthorized access to the switch, set the passwords as follows:

1. Open the console interface with the default user name and password “admin” to access the Privileged Exec level.
2. Type “configure” and press <Enter>.
3. Type “username guest password 0 *password*,” for the Normal Exec level, where *password* is your new password. Press <Enter>.
4. Type “username admin password 0 *password*,” for the Privileged Exec level, where *password* is your new password. Press <Enter>.

```
Username: admin
Password:

      CLI session with the LAYER 3 12PORT GIGABIT INTELLIGENT
      SWITCH is opened.
      To end the CLI session, enter [Exit].
Console#configure
Console(config)#username guest password 0 [password]
Console(config)#username admin password 0 [password]
Console(config)#
```

Setting an IP Address

You must establish IP address information for the switch to obtain management access through the network. This can be done in either of the following ways:

Manual — You have to input the information, including IP address and subnet mask. If your management station is not in the same IP subnet as the switch, you will also need to specify the default gateway router.

Dynamic — The switch sends IP configuration requests to BOOTP or DHCP address allocation servers on the network.

Manual Configuration

You can manually assign an IP address to the switch. You may also need to specify a default gateway that resides between this device and management stations that exist on another network segment (if routing is not enabled on this switch). Valid IP addresses consist of four decimal numbers, 0 to 255, separated by periods. Anything outside this format will not be accepted by the CLI program.

Note: The IP address for this switch is obtained via DHCP by default.

Before you can assign an IP address to the switch, you must obtain the following information from your network administrator:

- IP address for the switch
- Default gateway for the network
- Network mask for this network

To assign an IP address to the switch, complete the following steps:

1. From the Privileged Exec level global configuration mode prompt, type “interface vlan 1” to access the interface-configuration mode. Press <Enter>.
2. Type “ip address *ip-address netmask*,” where “ip-address” is the switch IP address and “netmask” is the network mask for the network. Press <Enter>.
3. Type “exit” to return to the global configuration mode prompt. Press <Enter>.
4. To set the IP address of the default gateway for the network to which the switch belongs, type “ip default-gateway *gateway*,” where “gateway” is the IP address of the default gateway. Press <Enter>.

```
Console(config)#interface vlan 1
Console(config-if)#ip address 192.168.1.5 255.255.255.0
Console(config-if)#exit
Console(config)#ip default-gateway 192.168.1.254
Console(config)#
```

Dynamic Configuration

If you select the “bootp” or “dhcp” option, IP will be enabled but will not function until a BOOTP or DHCP reply has been received. You therefore need to use the “ip dhcp restart client” command to start broadcasting service requests. Requests will be sent periodically in an effort to obtain IP configuration information. (BOOTP and DHCP values can include the IP address, subnet mask, and default gateway.)

If the “bootp” or “dhcp” option is saved to the startup-config file (step 6), then the switch will start broadcasting service requests as soon as it is powered on.

To automatically configure the switch by communicating with BOOTP or DHCP address allocation servers on the network, complete the following steps:

1. From the Global Configuration mode prompt, type “interface vlan 1” to access the interface-configuration mode. Press <Enter>.
2. At the interface-configuration mode prompt, use one of the following commands:
 - To obtain IP settings via DHCP, type “ip address dhcp” and press <Enter>.
 - To obtain IP settings via BOOTP, type “ip address bootp” and press <Enter>.
3. Type “end” to return to the Privileged Exec mode. Press <Enter>.
4. Type “ip dhcp restart client” to begin broadcasting service requests. Press <Enter>.

2 Initial Configuration

5. Wait a few minutes, and then check the IP configuration settings by typing the “show ip interface” command. Press <Enter>.
6. Then save your configuration changes by typing “copy running-config startup-config.” Enter the startup file name and press <Enter>.

```
Console(config)#interface vlan 1
Console(config-if)#ip address dhcp
Console(config-if)#end
Console#ip dhcp restart client
Console#show ip interface
  IP address and netmask: 192.168.1.54 255.255.255.0 on VLAN 1,
  and address mode: User specified.
Console#copy running-config startup-config
Startup configuration file name []: startup
\Write to FLASH Programming.

\Write to FLASH finish.
Success.
```

Enabling SNMP Management Access

The switch can be configured to accept management commands from Simple Network Management Protocol (SNMP) applications such as HP OpenView. You can configure the switch to (1) respond to SNMP requests or (2) generate SNMP traps.

When SNMP management stations send requests to the switch (either to return information or to set a parameter), the switch provides the requested data or sets the specified parameter. The switch can also be configured to send information to SNMP managers (without being requested by the managers) through trap messages, which inform the manager that certain events have occurred.

The switch includes an SNMP agent that supports SNMP version 1, 2c, and 3 clients. To provide management access for version 1 or 2c clients, you must specify a community string. The switch provides a default MIB View (i.e., an SNMPv3 construct) for the default “public” community string that provides read access to the entire MIB tree, and a default view for the “private” community string that provides read/write access to the entire MIB tree. However, you may assign new views to version 1 or 2c community strings that suit your specific security requirements (see page 3-43).

Community Strings (for SNMP version 1 and 2c clients)

Community strings are used to control management access to SNMP version 1 and 2c stations, as well as to authorize SNMP stations to receive trap messages from the switch. You therefore need to assign community strings to specified users, and set the access level.

The default strings are:

- **public** - with read-only access. Authorized management stations are only able to retrieve MIB objects.
- **private** - with read-write access. Authorized management stations are able to both retrieve and modify MIB objects.

To prevent unauthorized access to the switch from SNMP version 1 or 2c clients, it is recommended that you change the default community strings.

To configure a community string, complete the following steps:

1. From the Privileged Exec level global configuration mode prompt, type “snmp-server community *string mode*,” where “string” is the community access string and “mode” is **rw** (read/write) or **ro** (read only). Press <Enter>. (Note that the default mode is read only.)
2. To remove an existing string, simply type “no snmp-server community *string*,” where “string” is the community access string to remove. Press <Enter>.

```
Console(config)#snmp-server community admin rw
Console(config)#snmp-server community private
Console(config)#
```

Note: If you do not intend to support access to SNMP version 1 and 2c clients, we recommend that you delete both of the default community strings. If there are no community strings, then SNMP management access from SNMP v1 and v2c clients is disabled.

Trap Receivers

You can also specify SNMP stations that are to receive traps from the switch. To configure a trap receiver, use the “snmp-server host” command. From the Privileged Exec level global configuration mode prompt, type:

```
“snmp-server host host-address community-string
[version {1 | 2c | 3 {auth | noauth | priv}}]”
```

where “host-address” is the IP address for the trap receiver, “community-string” specifies access rights for a version 1/2c host, or is the user name of a version 3 host, “version” indicates the SNMP client version, and “auth | noauth | priv” means that authentication, no authentication, or authentication and privacy is used for v3 clients. Then press <Enter>. For a more detailed description of these parameters, see “snmp-server host” on page 4-117. The following example creates a trap host for each type of SNMP client.

```
Console(config)#snmp-server host 10.1.19.23 batman
Console(config)#snmp-server host 10.1.19.98 robin version 2c
Console(config)#snmp-server host 10.1.19.34 barbie version 3 auth
Console(config)#
```

Configuring Access for SNMP Version 3 Clients

To configure management access for SNMPv3 clients, you need to first create a view that defines the portions of MIB that the client can read or write, assign the view to a group, and then assign the user to a group. The following example creates one view called “mib-2” that includes the entire MIB-2 tree branch, and then another view that includes the IEEE 802.1d bridge MIB. It assigns these respective read and read/write views to a group call “r&d” and specifies group authentication via MD5 or SHA. In the last step, it assigns a v3 user to this group, indicating that MD5 will be used for authentication, provides the password “greenpeace” for authentication, and the password “einstien” for encryption.

```
Console(config)#snmp-server view mib-2 1.3.6.1.2.1 included
Console(config)#snmp-server view 802.1d 1.3.6.1.2.1.17 included
Console(config)#snmp-server group r&d v3 auth mib-2 802.1d
Console(config)#snmp-server user steve group r&d v3 auth md5 greenpeace
priv des56 einstien
Console(config)#
```

For a more detailed explanation on how to configure the switch for access from SNMP v3 clients, refer to “Simple Network Management Protocol” on page 3-35, or refer to the specific CLI commands for SNMP starting on page 4-113.

Saving Configuration Settings

Configuration commands only modify the running configuration file and are not saved when the switch is rebooted. To save all your configuration changes in nonvolatile storage, you must copy the running configuration file to the start-up configuration file using the “copy” command.

To save the current configuration settings, enter the following command:

1. From the Privileged Exec mode prompt, type “copy running-config startup-config” and press <Enter>.
2. Enter the name of the start-up file. Press <Enter>.

```
Console#copy running-config startup-config
Startup configuration file name []: startup
\Write to FLASH Programming.

\Write to FLASH finish.
Success.

Console#
```

Managing System Files

The switch's flash memory supports three types of system files that can be managed by the CLI program, web interface, or SNMP. The switch's file system allows files to be uploaded and downloaded, copied, deleted, and set as a start-up file.

The three types of files are:

- **Configuration** — This file stores system configuration information and is created when configuration settings are saved. Saved configuration files can be selected as a system start-up file or can be uploaded via TFTP to a server for backup. A file named "Factory_Default_Config.cfg" contains all the system default settings and cannot be deleted from the system. See "Saving or Restoring Configuration Settings" on page 3-22 for more information.
- **Operation Code** — System software that is executed after boot-up, also known as run-time code. This code runs the switch operations and provides the CLI and web management interfaces. See "Managing Firmware" on page 3-19 for more information.
- **Diagnostic Code** — Software that is run during system boot-up, also known as POST (Power On Self-Test).

Due to the size limit of the flash memory, the switch supports only two operation code files. However, you can have as many diagnostic code files and configuration files as available flash memory space allows.

In the system flash memory, one file of each type must be set as the start-up file. During a system boot, the diagnostic and operation code files set as the start-up file are run, and then the start-up configuration file is loaded.

Note that configuration files should be downloaded using a file name that reflects the contents or usage of the file settings. If you download directly to the running-config, the system will reboot, and the settings will have to be copied from the running-config to a permanent file.

2 Initial Configuration

Chapter 3: Configuring the Switch

Using the Web Interface

This switch provides an embedded HTTP web agent. Using a web browser you can configure the switch and view statistics to monitor network activity. The web agent can be accessed by any computer on the network using a standard web browser (Internet Explorer 5.0 or above, or Netscape Navigator 6.2 or above).

Note: You can also use the Command Line Interface (CLI) to manage the switch over a serial connection to the console port or via Telnet. For more information on using the CLI, refer to Chapter 4: “Command Line Interface.”

Prior to accessing the switch from a web browser, be sure you have first performed the following tasks:

1. Configure the switch with a valid IP address, subnet mask, and default gateway using an out-of-band serial connection, BOOTP or DHCP protocol. (See “Setting an IP Address” on page 2-4.)
2. Set user names and passwords using an out-of-band serial connection. Access to the web agent is controlled by the same user names and passwords as the onboard configuration program. (See “Setting Passwords” on page 2-4.)
3. After you enter a user name and password, you will have access to the system configuration program.

- Notes:**
1. You are allowed three attempts to enter the correct password; on the third failed attempt the current connection is terminated.
 2. If you log into the web interface as guest (Normal Exec level), you can view the configuration settings or change the guest password. If you log in as “admin” (Privileged Exec level), you can change the settings on any page.
 3. If the path between your management station and this switch does not pass through any device that uses the Spanning Tree Algorithm, then you can set the switch port attached to your management station to fast forwarding (i.e., enable Admin Edge Port) to improve the switch’s response time to management commands issued through the web interface. See “Configuring Interface Settings” on page 3-110.

Navigating the Web Browser Interface

To access the web-browser interface you must first enter a user name and password. The administrator has Read/Write access to all configuration parameters and statistics. The default user name and password for the administrator is “admin.”

Home Page

When your web browser connects with the switch’s web agent, the home page is displayed as shown below. The home page displays the Main Menu on the left side of the screen and System Information on the right side. The Main Menu links are used to navigate to other menus, and display configuration parameters and statistics.

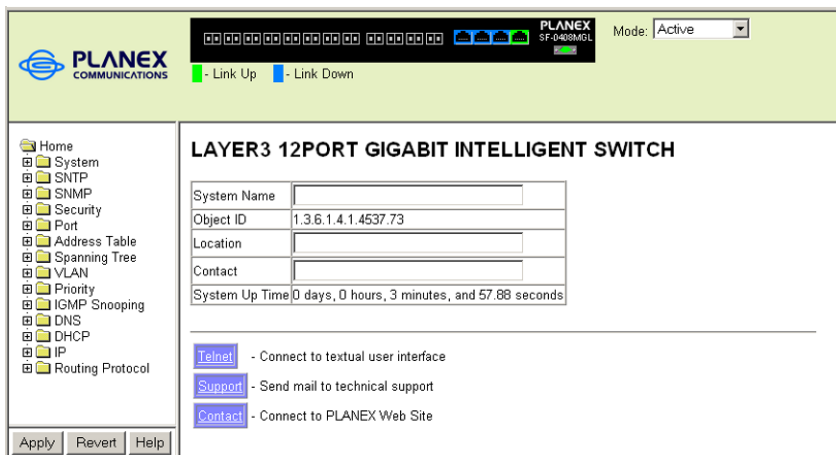


Figure 3-1 Home Page

Configuration Options

Configurable parameters have a dialog box or a drop-down list. Once a configuration change has been made on a page, be sure to click on the Apply button to confirm the new setting. The following table summarizes the web page configuration buttons.

Table 3-1 Web Page Configuration Buttons

Button	Action
Revert	Cancels specified values and restores current values prior to pressing "Apply" or "Apply Changes."
Refresh	Immediately updates values for the current page.
Apply	Sets specified values to the system.
Help	Links directly to web help.

- Notes:**
1. To ensure proper screen refresh, be sure that Internet Explorer 5.x is configured as follows: Under the menu "Tools / Internet Options / General / Temporary Internet Files / Settings," the setting for item "Check for newer versions of stored pages" should be "Every visit to the page."
 2. When using Internet Explorer 5.0, you may have to manually refresh the screen after making configuration changes by pressing the browser's refresh button.

Panel Display

The web agent displays an image of the switch's ports. The Mode can be set to display different information for the ports, including Active (i.e., up or down), Duplex (i.e., half or full duplex), or Flow Control (i.e., with or without flow control). Clicking on the image of a port opens the Port Configuration page as described on page 3-81.



Figure 3-2 Front Panel Indicators

Main Menu

Using the onboard web agent, you can define system parameters, manage and control the switch, and all its ports, or monitor network conditions. The following table briefly describes the selections available from this program.

Table 3-2 Switch Main Menu

Menu	Description	Page
System		3-11
System Information	Provides basic system description, including contact information	3-11
Switch Information	Shows the number of ports, hardware/firmware version numbers, and power status	3-12
Bridge Extension	Shows the bridge extension parameters	3-14
File Management		3-19
Copy Operation	Allows the transfer and copying files	3-19
Delete	Allows deletion of files from the flash memory	3-19
Set Startup	Sets the startup file	3-19
Line		3-24
Console	Sets console port connection parameters	3-24
Telnet	Sets Telnet connection parameters	3-26
Log		3-28
Logs	Sends error messages to a logging process	3-28
System Logs	Stores and displays error messages	3-32
Remote Logs	Configures the logging of messages to a remote logging process	3-30
Reset	Restarts the switch	3-32
SNTP		3-33
Configuration	Configures SNTP client settings, including broadcast mode or a specified list of servers	3-33
Clock Time Zone	Sets the local time zone for the system clock	3-34
SNMP		3-35
Configuration	Configures community strings and related trap functions	3-36
Agent Status	Enables or disables SNMP	3-36
SNMPv3		3-38
Engine ID	Sets the SNMP v3 engine ID	3-38
Users	Configures SNMP v3 users	3-39
Groups	Configures SNMP v3 groups	3-41
Views	Configures SNMP v3 views	3-43

Table 3-2 Switch Main Menu (Continued)

Menu	Description	Page
Security		3-36
User Accounts	Configures user names, passwords, and access levels	3-44
Authentication Settings	Configures authentication sequence, RADIUS and TACACS	3-46
HTTPS Settings	Configures secure HTTP settings	3-48
SSH		3-50
Settings	Configures Secure Shell server settings	3-54
Host-Key Settings	Generates the host key pair (public and private)	3-52
Port Security	Configures per port security, including status, response for security breach, and maximum allowed MAC addresses	3-55
802.1X	Port authentication	3-57
Information	Displays global configuration settings	3-58
Configuration	Configures protocol parameters	3-60
Port Configuration	Sets the authentication mode for individual ports	3-61
Statistics	Displays protocol statistics for the selected port	3-62
ACL		3-66
Configuration	Configures packet filtering based on IP or MAC addresses	3-66
Mask Configuration	Controls the order in which ACL rules are checked	3-73
Port Binding	Binds a port to the specified ACL	3-77
IP Filter	Configures IP addresses that are allowed management access	3-64
Port		3-78
Port Information	Displays port connection status	3-78
Trunk Information	Displays trunk connection status	3-78
Port Configuration	Configures port connection settings	3-81
Trunk Configuration	Configures trunk connection settings	3-81
Trunk Membership	Specifies ports to group into static trunks	3-85
LACP		3-84
Port Broadcast Control	Sets the broadcast storm threshold for each port	3-88
Mirror Port Configuration	Sets the source and target ports for mirroring	3-90
Rate Limit		3-91
Input Port Configuration	Sets the input rate limit for each port	3-91
Input Trunk Configuration	Sets the input rate limit for each trunk	3-91
Output Port Configuration	Sets the output rate limit for each port	3-91
Output Trunk Configuration	Sets the output rate limit for each trunk	3-91

3 Configuring the Switch

Table 3-2 Switch Main Menu (Continued)

Menu	Description	Page
Port Statistics	Lists Ethernet and RMON port statistics	3-92
Address Table		3-96
Static Addresses	Displays entries for interface, address or VLAN	3-96
Dynamic Addresses	Displays or edits static entries in the Address Table	3-97
Address Aging	Sets timeout for dynamically learned entries	3-99
Spanning Tree		3-99
STA		
Information	Displays STA values used for the bridge	3-100
Configuration	Configures global bridge settings for STA, RSTP and MSTP	3-103
Port Information	Displays individual port settings for STA	3-107
Trunk Information	Displays individual trunk settings for STA	3-107
Port Configuration	Configures individual port settings for STA	3-110
Trunk Configuration	Configures individual trunk settings for STA	3-110
MSTP		
VLAN Configuration	Configures priority and VLANs for a spanning tree instance	3-112
Port Information	Displays port settings for a specified MST instance	3-115
Trunk Information	Displays trunk settings for a specified MST instance	3-115
Port Configuration	Configures port settings for a specified MST instance	3-116
Trunk Configuration	Configures trunk settings for a specified MST instance	3-116
VLAN		3-118
802.1Q VLAN		
GVRP Status	Enables GVRP VLAN registration protocol	3-121
Basic Information	Displays information on the VLAN type supported by this switch	3-121
Current Table	Shows the current port members of each VLAN and whether or not the port is tagged or untagged	3-122
Static List	Used to create or remove VLAN groups	3-123
Static Table	Modifies the settings for an existing VLAN	3-124
Static Membership	Configures membership type for interfaces, including tagged, untagged or forbidden	3-126
Port Configuration	Specifies default PVID and VLAN attributes	3-127
Trunk Configuration	Specifies default trunk VID and VLAN attributes	3-127
Private VLAN		
Status	Enables or disables the private VLAN	3-129

Table 3-2 Switch Main Menu (Continued)

Menu	Description	Page
Link Status	Configures the private VLAN	3-130
Protocol VLAN		
Configuration	Creates a protocol group, specifying the supported protocols	3-131
Port Configuration	Maps a protocol group to a VLAN	3-132
Priority		3-133
Default Port Priority	Sets the default priority for each port	3-133
Default Trunk Priority	Sets the default priority for each trunk	3-133
Traffic Classes	Maps IEEE 802.1p priority tags to output queues	3-135
Traffic Classes Status	Enables/disables traffic class priorities (not implemented)	NA
Queue Mode	Sets queue mode to strict priority or Weighted Round-Robin	3-137
Queue Scheduling	Configures Weighted Round Robin queueing	3-137
IP Precedence/ DSCP Priority Status	Globally selects IP Precedence or DSCP Priority, or disables both.	3-139
IP Precedence Priority	Sets IP Type of Service priority, mapping the precedence tag to a class-of-service value	3-140
IP DSCP Priority	Sets IP Differentiated Services Code Point priority, mapping a DSCP tag to a class-of-service value	3-141
IP Port Priority Status	Globally enables or disables IP Port Priority	3-143
IP Port Priority	Sets TCP/UDP port priority, defining the socket number and associated class-of-service value	3-143
ACL CoS Priority	Sets the CoS value and corresponding output queue for packets matching an ACL rule	3-144
ACL Marker	Change traffic priorities for frames matching an ACL rule	3-145
IGMP Snooping		3-147
IGMP Configuration	Enables multicast filtering; configures parameters for multicast query	3-149
Multicast Router Port Information	Displays the ports that are attached to a neighboring multicast router for each VLAN ID	3-151
Static Multicast Router Port Configuration	Assigns ports that are attached to a neighboring multicast router	3-152
IP Multicast Registration Table	Displays all multicast groups active on this switch, including multicast IP addresses and VLAN ID	3-153
IGMP Member Port Table	Indicates multicast addresses associated with the selected VLAN	3-154

3 Configuring the Switch

Table 3-2 Switch Main Menu (Continued)

Menu	Description	Page
DNS		3-159
General Configuration	Enables DNS; configures domain name and domain list; and specifies IP address of name servers for dynamic lookup	3-159
Static Host Table	Configures static entries for domain name to address mapping	3-161
Cache	Displays cache entries discovered by designated name servers	3-163
DHCP		3-164
Relay Configuration	Specifies DHCP relay servers; enables or disables relay service	3-164
Server	Configures DHCP server parameters	3-164
General	Enables DHCP server; configures excluded address range	3-166
Pool Configuration	Configures address pools for network groups or a specific host	3-168
IP Binding	Displays addresses currently bound to DHCP clients	3-172
IP		3-182
General		3-185
Global Settings	Enables or disables routing, specifies the default gateway	3-185
Routing Interface	Configures the IP interface for the specified VLAN	3-186
ARP		3-188
General	Sets the protocol timeout, and enables or disables proxy ARP for the specified VLAN	3-189
Static Addresses	Statically maps a physical address to an IP address	3-190
Dynamic Addresses	Shows dynamically learned entries in the IP routing table	3-191
Other Addresses	Shows internal addresses used by the switch	3-192
Statistics	Shows statistics on ARP requests sent and received	3-193
IGMP		3-154
Interface Settings	Configures Layer 3 IGMP for specific VLAN interfaces	3-155
Group Membership	Displays the current multicast groups learned via IGMP	3-158
Statistics		3-194
IP	Shows statistics for IP traffic, including the amount of traffic, address errors, routing, fragmentation and reassembly	3-194
ICMP	Shows statistics for ICMP traffic, including the amount of traffic, protocol errors, and the number of echoes, timestamps, and address masks	3-196
UDP	Shows statistics for UDP, including the amount of traffic and errors	3-198
TCP	Shows statistics for TCP, including the amount of traffic and TCP connection activity	3-199

Table 3-2 Switch Main Menu (Continued)

Menu	Description	Page
Routing		3-183
Static Routes	Configures and display static routing entries	3-200
Routing Table	Shows all routing entries, including local, static and dynamic routes	3-201
Multicast Routing		3-238
General Settings	Globally enables multicast routing	3-238
Multicast Routing Table	Shows each multicast route this switch has learned	3-239
VRRP		3-174
Group Configuration	Configures VRRP groups, including virtual interface address, advertisement interval, preemption, priority, and authentication	3-174
Global Statistics	Displays global statistics for VRRP protocol packet errors	3-179
Group Statistics	Displays statistics for VRRP protocol events and errors on the specified VRRP group and interface	3-180
Routing Protocol		3-184
RIP		3-202
General Settings	Enables or disables RIP, sets the global RIP version and timer values	3-203
Network Addresses	Configures the network interfaces that will use RIP	3-205
Interface Settings	Configures RIP parameters for each interface, including send and receive versions, message loopback prevention, and authentication	3-206
Statistics	Displays general information on update time, route changes and number of queries, as well as a list of statistics for known interfaces and neighbors	3-209
OSPF		3-212
General Configuration	Enables or disables OSPF; also configures the Router ID and various other global settings	3-213
Area Configuration	Specifies rules for importing routes into each area	3-216
Area Range Configuration	Configures route summaries to advertise at an area boundary	3-219
Interface Configuration	Shows area ID and designated router; also configures OSPF protocol settings and authentication for each interface	3-221
Virtual Link Configuration	Configures a virtual link through a transit area to the backbone	3-225
Network Area Address Configuration	Defines OSPF areas and associated interfaces	3-227
Summary Address Configuration	Aggregates routes learned from other protocols for advertising into other autonomous systems	3-230
Redistribute Configuration	Redistributes routes from one routing domain to another	3-231

3 Configuring the Switch

Table 3-2 Switch Main Menu (Continued)

Menu	Description	Page
NSSA Settings	Configures settings for importing routes into or exporting routes out of not-so-stubby areas	3-232
Link State Database Information	Shows information about different OSPF Link State Advertisements (LSAs) stored in this router's database	3-234
Border Router Information	Displays routing table entries for area border routers and autonomous system boundary routers	3-236
Neighbor Information	Displays information about neighboring routers on each interface within an OSPF area	3-237
DVMRP		3-242
General Settings	Configure global settings for prune and graft messages, and the exchange of routing information	3-242
Interface Settings	Enables/disables DVMRP per interface and sets the route metric	3-245
Neighbor Information	Displays neighboring DVMRP routers	3-247
Routing Table	Displays DVMRP routing information	3-248
PIM-DM		
General Settings	Enables or disables PIM-DM globally for the switch	3-249
Interface Settings	Enables or disables PIM-DM per interface, configures protocol settings for hello, prune and graft messages	3-250
Interface Information	Displays summary information for each interface	3-253
Neighbor Information	Displays neighboring PIM-DM routers	3-253

Basic Configuration

Displaying System Information

You can easily identify the system by displaying the device name, location and contact information.

Field Attributes

- **System Name** – Name assigned to the switch system.
- **Object ID** – MIB II object ID for switch's network management subsystem.
- **Location** – Specifies the system location.
- **Contact** – Administrator responsible for the system.
- **System Up Time** – Length of time the management agent has been up.

These additional parameters are displayed for the CLI.

- **MAC Address** – The physical layer address for this switch.
- **Web server** – Shows if management access via HTTP is enabled.
- **Web server port** – Shows the TCP port number used by the web interface.
- **Web secure server** – Shows if management access via HTTPS is enabled.
- **Web secure server port** – Shows the TCP port used by the HTTPS interface.
- **Telnet server** – Shows if management access via Telnet is enabled.
- **Telnet server port** – Shows the TCP port used by the Telnet interface.
- **Jumbo Frame** – Shows if jumbo frames are enabled.
- **POST result** – Shows results of the power-on self-test

Web – Click System, System Information. Specify the system name, location, and contact information for the system administrator, then click Apply. (This page also includes a Telnet button that allows access to the Command Line Interface via Telnet.)

LAYER3 12PORT GIGABIT INTELLIGENT SWITCH

System Name	<input type="text"/>
Object ID	1.3.6.1.4.1.4537.73
Location	<input type="text"/>
Contact	<input type="text"/>
System Up Time	0 days, 0 hours, 9 minutes, and 30.45 seconds

[Telnet](#) - Connect to textual user interface
[Support](#) - Send mail to technical support
[Contact](#) - Connect to PLANEX Web Site

Figure 3-3 System Information

3 Configuring the Switch

CLI – Specify the hostname, location and contact information.

```
Console(config)#hostname R&D 5 4-26
Console(config)#snmp-server location WC 9 4-116
Console(config)#snmp-server contact Ted 4-115
Console(config)#exit
Console#show system 4-61
System description: LAYER 3 12PORT GIGABIT INTELLIGENT SWITCH
System OID string: 1.3.6.1.4.1.4537.73
System information
System Up time: 0 days, 2 hours, 4 minutes, and 7.13 seconds
System Name : R&D 5
System Location : WC 9
System Contact : Ted
MAC address : 00-30-f1-47-58-3a
Web server : enable
Web server port : 80
Web secure server : enable
Web secure server port : 443
Telnet server : enable
Telnet server port : 23
Jumbo Frame : Disabled
POST result
DUMMY Test 1.....PASS
UART LOOP BACK Test.....PASS
DRAM Test.....PASS
Timer Test.....PASS
PCI Device 1 Test.....PASS
PCI Device 2 Test.....PASS
I2C bus Initialization.....PASS
RTC Initialization.....PASS
Switch Int Loopback test....PASS

Done All Pass.
Console#
```

Displaying Switch Hardware/Software Versions

Use the Switch Information page to display hardware/firmware version numbers for the main board and management software, as well as the power status of the system.

Field Attributes

Main Board

- **Serial Number** – The serial number of the switch.
- **Number of Ports** – Number of built-in ports.
- **Hardware Version** – Hardware version of the main board.
- **Internal Power Status** – Displays the status of the internal power supply.

Management Software

- **Loader Version** – Version number of loader code.
- **Boot-ROM Version** – Version of Power-On Self-Test (POST) and boot code.
- **Operation Code Version** – Version number of runtime code.
- **Role** – Shows that this switch is operating as Master (i.e., operating stand-alone).

These additional parameters are displayed for the CLI.

- **Unit ID** – Unit number in stack.
- **Redundant Power Status** – Displays the status of the redundant power supply.

Web – Click System, Switch Information.

Switch Information	
Main Board:	
Serial Number	A322043872
Number of Ports	12
Hardware Version	R01
Internal Power Status	Active
Management Software:	
Loader Version	2.1.0.0
Boot-ROM Version	2.0.5.1
Operation Code Version	1.0.2.16
Role	Master

Figure 3-4 Switch Information

CLI – Use the following command to display version information.

```

Console#show version
Unit1
  Serial number       : A322043872
  Hardware version    : R01
  Number of ports     : 12
  Main power status   : up
  Redundant power status :not present

Agent (master)
  Unit ID             : 1
  Loader version      : 2.1.0.0
  Boot ROM version    : 2.0.5.1
  Operation code version : 1.0.2.31

Console#

```

4-62

Displaying Bridge Extension Capabilities

The Bridge MIB includes extensions for managed devices that support Multicast Filtering, Traffic Classes, and Virtual LANs. You can access these extensions to display default settings for the key variables.

Field Attributes

- **Extended Multicast Filtering Services** – This switch does not support the filtering of individual multicast addresses based on GMRP (GARP Multicast Registration Protocol).
- **Traffic Classes** – This switch provides mapping of user priorities to multiple traffic classes. (Refer to “Class of Service Configuration” on page 3-133.)
- **Static Entry Individual Port** – This switch allows static filtering for unicast and multicast addresses. (Refer to “Setting Static Addresses” on page 3-96.)
- **VLAN Learning** – This switch uses Independent VLAN Learning (IVL), where each port maintains its own filtering database.
- **Configurable PVID Tagging** – This switch allows you to override the default Port VLAN ID (PVID used in frame tags) and egress status (VLAN-Tagged or Untagged) on each port. (Refer to “VLAN Configuration” on page 3-118.)
- **Local VLAN Capable** – This switch does not support multiple local bridges outside of the scope of 802.1Q defined VLANs.
- **GMRP** – GARP Multicast Registration Protocol (GMRP) allows network devices to register endstations with multicast groups. This switch does not support GMRP; it uses the Internet Group Management Protocol (IGMP) to provide automatic multicast filtering.

Web – Click System, Bridge Extension.

The screenshot shows a web interface for "Bridge Extension Configuration". Under the "Bridge Capability" section, there is a table with the following data:

Extended Multicast Filtering Services	No
Traffic Classes	Enabled
Static Entry Individual Port	Yes
VLAN Learning	IVL
Configurable PVID Tagging	Yes
Local VLAN Capable	No

Below the table, there is a checkbox for "GMRP" which is currently unchecked, with the text "Enable" next to it.

Figure 3-5 Bridge Extension Configuration

CLI – Enter the following command.

```
Console#show bridge-ext 4-204
Max support vlan numbers: 255
Max support vlan ID: 4094
Extended multicast filtering services: No
Static entry individual port: Yes
VLAN learning: IVL
Configurable PVID tagging: Yes
Local VLAN capable: Yes
Traffic classes: Enabled
Global GVRP status: Disabled
GMRP: Disabled
Console#
```

Setting the Switch's IP Address

This section describes how to configure an initial IP interface for management access over the network. The IP address for this switch is obtained via DHCP by default. To manually configure an address, you need to change the switch's default settings to values that are compatible with your network. You may also need to establish a default gateway between the switch and management stations that exist on another network segment (if routing is not enabled on this switch).

You can manually configure a specific IP address, or direct the device to obtain an address from a BOOTP or DHCP server. Valid IP addresses consist of four decimal numbers, 0 to 255, separated by periods. Anything outside this format will not be accepted by the CLI program.

Command Usage

- This section describes how to configure a single local interface for initial access to the switch. To configure multiple IP interfaces on this switch, you must set up an IP interface for each VLAN (page 3-186).
- To enable routing between the different interfaces on this switch, you must enable IP routing (page 3-185).
- To enable routing between the interfaces defined on this switch and external network interfaces, you must configure static routes (page 3-200) or use dynamic routing; i.e., either RIP (page 3-202) or OSPF (page 3-212).
- The precedence for configuring IP interfaces is the IP / General / Routing Interface menu (page 3-186), static routes (page 3-200), and then dynamic routing.


3 Configuring the Switch

Command Attributes

- **VLAN** – ID of the configured VLAN (1-4094, no leading zeroes). By default, all ports on the switch are members of VLAN 1. However, the management station can be attached to a port belonging to any VLAN, as long as that VLAN has been assigned an IP address.
- **IP Address Mode** – Specifies whether IP functionality is enabled via manual configuration (Static), Dynamic Host Configuration Protocol (DHCP), or Boot Protocol (BOOTP). If DHCP/BOOTP is enabled, IP will not function until a reply has been received from the server. Requests will be broadcast periodically by the switch for an IP address. (DHCP/BOOTP values can include the IP address, subnet mask, and default gateway.)
- **IP Address** – Address of the VLAN to which the management station is attached. (Note you can manage the switch through any configured IP interface.) Valid IP addresses consist of four numbers, 0 to 255, separated by periods. (Default: 0.0.0.0)
- **Subnet Mask** – This mask identifies the host address bits used for routing to specific subnets. (Default: 255.0.0.0)
- **Default Gateway** – IP address of the gateway router between this device and management stations that exist on other network segments. (Default: 0.0.0.0)

Manual Configuration

Web – Click IP, General, Routing Interface. Select the VLAN through which the management station is attached, set the IP Address Mode to “Static,” and specify a “Primary” interface. Enter the IP address, subnet mask and gateway, then click Apply.

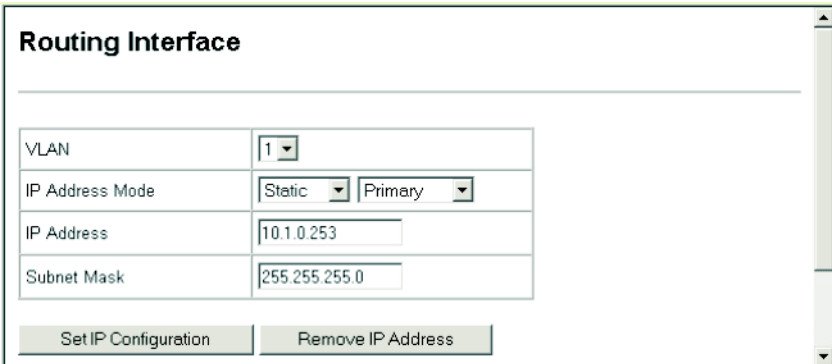

The screenshot shows a web interface titled "Routing Interface". It contains a form with the following fields and values:

VLAN	1
IP Address Mode	Static Primary
IP Address	10.1.0.253
Subnet Mask	255.255.255.0

At the bottom of the form are two buttons: "Set IP Configuration" and "Remove IP Address".

Figure 3-6 IP Interface Configuration - Manual

Click IP, Global Setting. If this switch and management stations exist on other network segments, then specify the default gateway, and click Apply.

Global Settings

IP Routing Status	Enabled ▾
Default Gateway	10.1.0.254

Clear default gateway

Figure 3-7 Default Gateway

CLI – Specify the management interface, IP address and default gateway.

```
Console#config
Console(config)#interface vlan 1                               4-149
Console(config-if)#ip address 10.1.0.253 255.255.255.0       4-236
Console(config-if)#exit
Console(config)#ip default-gateway 10.1.0.254                4-238
Console(config)#
```

3 Configuring the Switch

Using DHCP/BOOTP

If your network provides DHCP/BOOTP services, you can configure the switch to be dynamically configured by these services.

Web – Click IP, General, Routing Interface. Specify the VLAN to which the management station is attached, set the IP Address Mode to DHCP or BOOTP. Click Apply to save your changes. Then click Restart DHCP to immediately request a new address. Note that the switch will also broadcast a request for IP configuration settings on each power reset.

Routing Interface

VLAN	1
IP Address Mode	DHCP Primary
IP Address	192.168.1.51
Subnet Mask	255.255.255.0

Set IP Configuration Remove IP Address

Restart DHCP

Figure 3-8 IP Interface Configuration - DHCP

Note: If you lose your management connection, use a console connection and enter “show ip interface” to determine the new switch address.

CLI – Specify the management interface, and set the IP address mode to DHCP or BOOTP, and then enter the “ip dhcp restart client” command.

```
Console#config
Console(config)#interface vlan 1                               4-149
Console(config-if)#ip address dhcp                             4-236
Console(config-if)#end
Console#ip dhcp restart client                                 4-127
Console#show ip interface                                     4-238
  IP address and netmask: 192.168.1.54 255.255.255.0 on VLAN 1,
  and address mode: User specified.
Console#
```

Renewing DHCP – DHCP may lease addresses to clients indefinitely or for a specific period of time. If the address expires or the switch is moved to another network segment, you will lose management access to the switch. In this case, you can reboot the switch or submit a client request to restart DHCP service via the CLI.

Web – If the address assigned by DHCP is no longer functioning, you will not be able to renew the IP settings via the web interface. You can only restart DHCP service via the web interface if the current address is still available.

CLI – Enter the following command to restart DHCP service.

```
Console#ip dhcp restart client
Console#
```

4-127

Managing Firmware

You can upload/download firmware to or from a TFTP server. By saving runtime code to a file on a TFTP server, that file can later be downloaded to the switch to restore operation. You can also set the switch to use new firmware without overwriting the previous version. You must specify the method of file transfer, along with the file type and file names as required.

Command Attributes

- **File Transfer Method** – The firmware copy operation includes these options:
 - file to file – Copies a file within the switch directory, assigning it a new name.
 - file to tftp – Copies a file from the switch to a TFTP server.
 - tftp to file – Copies a file from a TFTP server to the switch.
 - file to unit¹ – Copies a file from this switch to another unit in the stack.
 - unit to file¹ – Copies a file from another unit in the stack to this switch.
- **TFTP Server IP Address** – The IP address of a TFTP server.
- **File Type** – Specify opcode (operational code) to copy firmware.
- **File Name** – The file name should not contain slashes (\ or /), the leading letter of the file name should not be a period (.), and the maximum length for file names on the TFTP server is 127 characters or 31 characters for files on the switch. (Valid characters: A-Z, a-z, 0-9, ".", "-", "_")

Note: Up to two copies of the system software (i.e., the runtime firmware) can be stored in the file directory on the switch. The currently designated startup version of this file cannot be deleted.

1. These operations are not supported for this switch.

3 Configuring the Switch

Downloading System Software from a Server

When downloading runtime code, you can specify the destination file name to replace the current image, or first download the file using a different name from the current runtime code file, and then set the new file as the startup file.

Web – Click System, File Management, Copy Operation. Select “tftp to file” as the file transfer method, enter the IP address of the TFTP server, set the file type to “opcode,” enter the file name of the software to download, select a file on the switch to overwrite or specify a new file name, then click Apply. If you replaced the current firmware used for startup and want to start using the new operation code, reboot the system via the System/Reset menu.

Copy

tftp to file

TFTP Server IP Address

File Type

Source File Name

Destination File Name V1025

Figure 3-9 Copy Firmware

If you download to a new destination file, go to the File Management, Set Start-Up menu, mark the operation code file used at startup, and click Apply. To start the new firmware, reboot the system via the System/Reset menu.

Set Start-Up

	Name	Type	Startup	Size(bytes)
<input type="radio"/>	Factory_Default_Config.cfg	Config_File	N	455
<input checked="" type="radio"/>	startup	Config_File	Y	1766
<input type="radio"/>	V10111	Operation_Code	N	2926528
<input checked="" type="radio"/>	V1025	Operation_Code	Y	2895644

Figure 3-10 Setting the Startup Code

To delete a file select System, File Management, Delete. Select the file name from the given list by checking the tick box and click Apply. Note that the file currently designated as the startup code cannot be deleted.

Delete				
	Name	Type	Startup	Size (bytes)
<input type="checkbox"/>	Factory_Default_Config.cfg	Config_File	N	455
<input checked="" type="checkbox"/>	startup	Config_File	Y	1766
<input type="checkbox"/>	V10111	Operation_Code	N	2926528
<input checked="" type="checkbox"/>	V1025	Operation_Code	Y	2895644

Figure 3-11 Deleting Files

CLI – To download new firmware form a TFTP server, enter the IP address of the TFTP server, select “config” as the file type, then enter the source and destination file names. When the file has finished downloading, set the new file to start up the system, and then restart the switch.

To start the new firmware, enter the “reload” command or reboot the system

```

Console#copy tftp file                                     4-64
TFTP server ip address: 10.1.0.19
Choose file type:
 1. config:  2. opcode: <1-2>: 2
Source file name: V1025.bix
Destination file name: V1025
\Write to FLASH Programming.
-Write to FLASH finish.
Success.
Console#config
Console(config)#boot system opcode:V1025                4-69
Console(config)#exit
Console#reload                                           4-23

```

Saving or Restoring Configuration Settings

You can upload/download configuration settings to/from a TFTP server. The configuration file can be later downloaded to restore the switch's settings.

Command Attributes

- **File Transfer Method** – The configuration copy operation includes these options:
 - file to file – Copies a file within the switch directory, assigning it a new name.
 - file to running-config – Copies a file in the switch to the running configuration.
 - file to startup-config – Copies a file in the switch to the startup configuration.
 - file to tftp – Copies a file from the switch to a TFTP server.
 - running-config to file – Copies the running configuration to a file.
 - running-config to startup-config – Copies the running config to the startup config.
 - running-config to tftp – Copies the running configuration to a TFTP server.
 - startup-config to file – Copies the startup configuration to a file on the switch.
 - startup-config to running-config – Copies the startup config to the running config.
 - startup-config to tftp – Copies the startup configuration to a TFTP server.
 - tftp to file – Copies a file from a TFTP server to the switch.
 - tftp to running-config – Copies a file from a TFTP server to the running config.
 - tftp to startup-config – Copies a file from a TFTP server to the startup config.
 - file to unit² – Copies a file from this switch to another unit in the stack.
 - unit to file² – Copies a file from another unit in the stack to this switch.
- **TFTP Server IP Address** – The IP address of a TFTP server.
- **File Type** – Specify config (configuration) to copy configuration settings.
- **File Name** — The configuration file name should not contain slashes (\ or /), the leading letter of the file name should not be a period (.), and the maximum length for file names on the TFTP server is 127 characters or 31 characters for files on the switch. (Valid characters: A-Z, a-z, 0-9, ".", "-", "_")

Note: The maximum number of user-defined configuration files is limited only by available flash memory space.

2. These operations are not supported for this switch.

Downloading Configuration Settings from a Server

You can download the configuration file under a new file name and then set it as the startup file, or you can specify the current startup configuration file as the destination file to directly replace it. Note that the file “Factory_Default_Config.cfg” can be copied to the TFTP server, but cannot be used as the destination on the switch.

Web – Click System, File Management, Copy Operation. Choose “tftp to startup-config” or “tftp to file,” and enter the IP address of the TFTP server. Specify the name of the file to download, select a file on the switch to overwrite or specify a new file name, and then click Apply.

Copy

TFTP Server IP Address	<input type="text" value="192.168.1.19"/>
Source File Name	<input type="text" value="config-startup"/>
Startup File Name	<input type="radio"/> <input type="text" value="Factory_Default_Config.cfg"/>
	<input checked="" type="radio"/> <input type="text" value="startup"/>

Figure 3-12 Downloading Configuration Settings for Start-Up

If you download to a new file name using “tftp to startup-config” or “tftp to file,” the file is automatically set as the start-up configuration file. To use the new settings, reboot the system via the System/Reset menu. You can also select any configuration file as the start-up configuration by using the System/File Management/Set Start-Up page.

Set Start-Up

	Name	Type	Startup	Size(bytes)
<input type="radio"/>	Factory_Default_Config.cfg	Config_File	N	455
<input type="radio"/>	startup	Config_File	Y	1766
<input checked="" type="radio"/>	startup-rd	Config_File	N	1766
<input type="radio"/>	V10111	Operation_Code	N	2926528
<input checked="" type="radio"/>	V1025	Operation_Code	Y	2895644

Figure 3-13 Setting the Startup Configuration Settings

3 Configuring the Switch

CLI – Enter the IP address of the TFTP server, specify the source file on the server, set the startup file name on the switch, and then restart the switch.

```
Console#copy tftp startup-config                               4-64
TFTP server ip address: 192.168.1.19
Source configuration file name: config-1
Startup configuration file name [] : startup
\Write to FLASH Programming.
-Write to FLASH finish.
Success.

Console#reload
```

To select another configuration file as the start-up configuration, use the boot system command and then restart the switch.

```
Console#config
Console(config)#boot system config: startup-new              4-69
Console(config)#exit
Console#reload                                               4-23
```

Console Port Settings

You can access the onboard configuration program by attaching a VT100 compatible device to the switch's serial console port. Management access through the console port is controlled by various parameters, including a password, timeouts, and basic communication settings. These parameters can be configured via the web or CLI interface.

Command Attributes

- **Login Timeout** – Sets the interval that the system waits for a user to log into the CLI. If a login attempt is not detected within the timeout interval, the connection is terminated for the session. (Range: 0 - 300 seconds; Default: 0)
- **Exec Timeout** – Sets the interval that the system waits until user input is detected. If user input is not detected within the timeout interval, the current session is terminated. (Range: 0 - 65535 seconds; Default: 0)
- **Password Threshold** – Sets the password intrusion threshold, which limits the number of failed logon attempts. When the logon attempt threshold is reached, the system interface becomes silent for a specified amount of time (set by the Silent Time parameter) before allowing the next logon attempt. (Range: 0-120; Default: 3 attempts)
- **Silent Time** – Sets the amount of time the management console is inaccessible after the number of unsuccessful logon attempts has been exceeded. (Range: 0-65535; Default: 0)
- **Data Bits** – Sets the number of data bits per character that are interpreted and generated by the console port. If parity is being generated, specify 7 data bits per character. If no parity is required, specify 8 data bits per character. (Default: 8 bits)
- **Parity** – Defines the generation of a parity bit. Communication protocols provided by some terminals can require a specific parity bit setting. Specify Even, Odd, or None. (Default: None)

- **Speed** – Sets the terminal line's baud rate for transmit (to terminal) and receive (from terminal). Set the speed to match the baud rate of the device connected to the serial port. (Range: 9600, 19200, 38400, 57600, 115200 baud, or Auto; Default: Auto)
- **Stop Bits** – Sets the number of the stop bits transmitted per byte. (Range: 1-2; Default: 1 stop bit)
- **Password**³ – Specifies a password for the line connection. When a connection is started on a line with password protection, the system prompts for the password. If you enter the correct password, the system shows a prompt. (Default: No password)
- **Login**³ – Enables password checking at login. You can select authentication by a single global password as configured for the Password parameter, or by passwords set up for specific user-name accounts. (Default: Local)

Web – Click System, Line, Console. Specify the console port connection parameters as required, then click Apply.

Console

Login Timeout (0-300)	<input style="width: 50px;" type="text" value="0"/> secs (0 : Disabled)
Exec Timeout (0-65535)	<input style="width: 50px;" type="text" value="0"/> secs (0 : Disabled)
Password Threshold (0-120)	<input style="width: 50px;" type="text" value="3"/> (0 : Disabled)
Silent Time (0-65535)	<input style="width: 50px;" type="text" value="0"/> secs (0 : Disabled)
Data Bits	<input style="width: 50px;" type="text" value="8"/>
Parity	<input style="width: 50px;" type="text" value="None"/>
Speed	<input style="width: 50px;" type="text" value="Auto"/>
Stop Bits	<input style="width: 50px;" type="text" value="1"/>

Figure 3-14 Configuring the Console Port

3. CLI only.

3 Configuring the Switch

CLI – Enter Line Configuration mode for the console, then specify the connection parameters as required. To display the current console port settings, use the **show line** command from the Normal Exec level.

```
Console(config)#line console 4-12
Console(config-line)#login local 4-12
Console(config-line)#password 0 secret 4-13
Console(config-line)#timeout login response 0 4-14
Console(config-line)#exec-timeout 0 4-15
Console(config-line)#password-thresh 5 4-15
Console(config-line)#silent-time 60 4-16
Console(config-line)#databits 8 4-17
Console(config-line)#parity none 4-17
Console(config-line)#speed auto 4-18
Console(config-line)#stopbits 1 4-18
Console(config-line)#end
Console#show line 4-19
Console configuration:
  Password threshold: 5 times
  Interactive timeout: Disabled
  Login timeout: Disabled
  Silent time: 60
  Baudrate: auto
  Databits: 8
  Parity: none
  Stopbits: 1
VTY configuration:
  Password threshold: 3 times
  Interactive timeout: 600 sec
  Login timeout: 300 sec
Console#
```

Telnet Settings

You can access the onboard configuration program over the network using Telnet (i.e., a virtual terminal). Management access via Telnet can be enabled/disabled and other various parameters set, including the TCP port number, timeouts, and a password. These parameters can be configured via the web or CLI interface.

Command Attributes

- **Telnet Status** – Enables or disables Telnet access to the switch.
(Default: Enabled)
- **Telnet Port Number** – Sets the TCP port number for Telnet on the switch.
(Default: 23)
- **Login Timeout** – Sets the interval that the system waits for a user to log into the CLI. If a login attempt is not detected within the timeout interval, the connection is terminated for the session. (Range: 0 - 300 seconds; Default: 300 seconds)
- **Exec Timeout** – Sets the interval that the system waits until user input is detected. If user input is not detected within the timeout interval, the current session is terminated. (Range: 0 - 65535 seconds; Default: 600 seconds)

- **Password Threshold** – Sets the password intrusion threshold, which limits the number of failed logon attempts. When the logon attempt threshold is reached, the system interface becomes silent for a specified amount of time (set by the Silent Time parameter) before allowing the next logon attempt. (Range: 0-120; Default: 3 attempts)
- **Password⁴** – Specifies a password for the line connection. When a connection is started on a line with password protection, the system prompts for the password. If you enter the correct password, the system shows a prompt. (Default: No password)
- **Login⁴** – Enables password checking at login. You can select authentication by a single global password as configured for the Password parameter, or by passwords set up for specific user-name accounts. (Default: Local)

Web – Click System, Line, Telnet. Specify the connection parameters for Telnet access, then click Apply.

Telnet	
Telnet Status	<input checked="" type="checkbox"/> Enabled
Telnet Port Number	<input type="text" value="23"/>
Login Timeout (0-300)	<input type="text" value="300"/> secs (0 : Disabled)
Exec Timeout (0-65535)	<input type="text" value="600"/> secs (0 : Disabled)
Password Threshold (0-120)	<input type="text" value="8"/> (0 : Disabled)

Figure 3-15 Configuring the Telnet Interface

4. CLI only.

3 Configuring the Switch

CLI – Enter Line Configuration mode for a virtual terminal, then specify the connection parameters as required. To display the current virtual terminal settings, use the **show line** command from the Normal Exec level.

```
Console(config)#line vty                                4-12
Console(config-line)#login local                       4-12
Console(config-line)#password 0 secret                 4-13
Console(config-line)#timeout login response 0         4-14
Console(config-line)#exec-timeout 600                 4-15
Console(config-line)#password-thresh 3                4-15
Console(config-line)#end
Console#show line                                     4-19
  Console configuration:
    Password threshold: 5 times
    Interactive timeout: Disabled
    Login timeout: Disabled
    Silent time: 60
    Baudrate: auto
    Databits: 8
    Parity: none
    Stopbits: 1

  VTY configuration:
    Password threshold: 3 times
    Interactive timeout: 600 sec
    Login timeout: 300 sec
Console#
```

Configuring Event Logging

The switch allows you to control the logging of error messages, including the type of events that are recorded in switch memory, logging to a remote System Log (syslog) server, and displays a list of recent event messages.

System Log Configuration

The system allows you to enable or disable event logging, and specify which levels are logged to RAM or flash memory.

Severe error messages that are logged to flash memory are permanently stored in the switch to assist in troubleshooting network problems. Up to 4096 log entries can be stored in the flash memory, with the oldest entries being overwritten first when the available log memory (256 kilobytes) has been exceeded.

The System Logs page allows you to configure and limit system messages that are logged to flash or RAM memory. The default is for event levels 0 to 3 to be logged to flash and levels 0 to 7 to be logged to RAM.

Command Attributes

- **System Log Status** – Enables/disables the logging of debug or error messages to the logging process. (Default: Enabled)
- **Flash Level** – Limits log messages saved to the switch's permanent flash memory for all levels up to the specified level. For example, if level 3 is specified, all messages from level 0 to level 3 will be logged to flash. (Range: 0-7, Default: 3)

Table 3-3 Logging Levels

Level Name	Level	Description
debugging	7	Debugging messages
informational	6	Informational messages only
notifications	5	Normal but significant condition, such as cold start
warnings	4	Warning conditions (e.g., return false, unexpected return)
errors	3	Error conditions (e.g., invalid input, default used)
critical	2	Critical conditions (e.g., memory allocation, or free memory error - resource exhausted)
alerts	1	Immediate action needed
emergencies	0	System unusable

* There are only Level 2, 5 and 6 error messages for the current firmware release.

- **RAM Level** – Limits log messages saved to the switch’s temporary RAM memory for all levels up to the specified level. For example, if level 7 is specified, all messages from level 0 to level 7 will be logged to RAM. (Range: 0-7, Default: 7)

Note: The Flash Level must be equal to or less than the RAM Level.

Web – Click System, Logs, System Logs. Specify System Log Status, set the level of event messages to be logged to RAM and flash memory, and click Apply.

System Logs

System Log Status	<input type="text" value="Disabled"/>
Flash Level (0-7)	<input type="text" value="3"/>
Ram Level (0-7)	<input type="text" value="7"/>

Figure 3-16 System Logs

CLI – Enable system logging and then specify the level of messages to be logged to RAM and flash memory. Use the **show logging** command to display the current settings.

```

Console(config)#logging on           4-44
Console(config)#logging history ram 0 4-45
Console(config)#
Console#show logging flash           4-48
Syslog logging: Disable
History logging in FLASH: level errors
Console#

```

Remote Log Configuration

The Remote Logs page allows you to configure the logging of messages that are sent to syslog servers or other management stations. You can also limit the event messages sent to only those messages at or above a specified level.

Command Attributes

- **Remote Log Status** – Enables/disables the logging of debug or error messages to the remote logging process. (Default: Disabled)
- **Logging Facility** – Sets the facility type for remote logging of syslog messages. There are eight facility types specified by values of 16 to 23. The facility type is used by the syslog server to dispatch log messages to an appropriate service. The attribute specifies the facility type tag sent in syslog messages. (See RFC 3164.) This type has no effect on the kind of messages reported by the switch. However, it may be used by the syslog server to process messages, such as sorting or storing messages in the corresponding database. (Range: 16-23, Default: 23)
- **Logging Trap** – Limits log messages that are sent to the remote syslog server for all levels up to the specified level. For example, if level 3 is specified, all messages from level 0 to level 3 will be sent to the remote server. (Range: 0-7, Default: 3)
- **Host IP List** – Displays the list of remote server IP addresses that will receive syslog messages. The maximum number of host IP addresses allowed is five.
- **Host IP Address** – Specifies a new server IP address to add to the Host IP List.

Web – Click System, Logs, Remote Logs. To add an IP address to the Host IP List, type the new IP address in the Host IP Address box, and then click Add. To delete an IP address, click the entry in the Host IP List, and then click Remove.

Remote Logs

Remote Log Status	Disabled ▾
Logging Facility (16-23)	<input style="width: 50px;" type="text" value="23"/>
Logging Trap (0-7)	<input style="width: 50px;" type="text" value="7"/>

Host IP Address:

Current:

Host IP List

(none)

New:

Host IP Address

Figure 3-17 Remote Logs

CLI – Enter the syslog server host IP address, choose the facility type and set the logging trap.

```

Console(config)#logging host 10.1.0.9           4-46
Console(config)#logging facility 23           4-46
Console(config)#logging trap 4                4-47
Console(config)#logging trap
Console(config)#
Console#show logging trap                      4-48
Syslog logging: Enable
REMOTELOG status: enable
REMOTELOG facility type: local use 7
REMOTELOG level type: Warning conditions
REMOTELOG server ip address: 10.1.0.9
REMOTELOG server ip address: 0.0.0.0
REMOTELOG server ip address: 0.0.0.0
REMOTELOG server ip address: 0.0.0.0
REMOTELOG server ip address: 0.0.0.0
Console#

```

3 Configuring the Switch

Displaying Log Messages

Use the Logs page to scroll through the logged system and event messages. The switch can store up to 2048 log entries in temporary random access memory (RAM; i.e., memory flushed on power reset) and up to 4096 entries in permanent flash memory.

Web – Click System, Log, Logs.

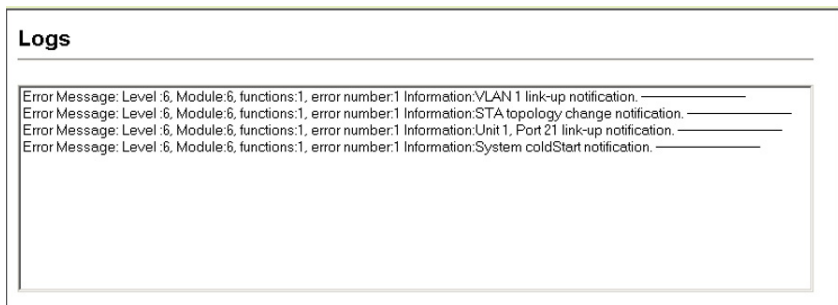


Figure 3-18 Displaying Logs

CLI – This example shows that system logging is enabled, the message level for flash memory is “errors” (i.e., default level 3 - 0), the message level for RAM is “debugging” (i.e., default level 7 - 0), and lists one sample error.

```
Console#show logging flash 4-48
Syslog logging: Enable
History logging in FLASH: level errors
Console#show logging ram 4-48
Syslog logging: Enable
History logging in RAM: level debugging
[0] 0:0:5 1/1/1 PRI_MGR_InitDefault function fails."
    level: 3, module: 13, function: 0, and event no.: 0
Console#
```

Resetting the System

Web – Click System, Reset. Click the Reset button to restart the switch. When prompted, confirm that you want reset the switch.



Figure 3-19 Resetting the System

CLI – Use the reload command to restart the switch.

```
Console#reload 4-23
System will be restarted, continue <y/n>?
```

Note: When restarting the system, it will always run the Power-On Self-Test.

Setting the System Clock

Simple Network Time Protocol (SNTP) allows the switch to set its internal clock based on periodic updates from a time server (SNTP or NTP). Maintaining an accurate time on the switch enables the system log to record meaningful dates and times for event entries. You can also manually set the clock using the CLI. (See “calendar set” on page 4-56.) If the clock is not set, the switch will only record the time from the factory default set at the last bootstrap.

When the SNTP client is enabled, the switch periodically sends a request for a time update to a configured time server. You can configure up to three time server IP addresses. The switch will attempt to poll each server in the configured sequence.

Configuring SNTP

You can configure the switch to send time synchronization requests to time servers.

Command Attributes

- **SNTP Client** – Configures the switch to operate as an SNTP client. This requires at least one time server to be specified in the SNTP Server field. (Default: Disabled)
- **SNTP Poll Interval** – Sets the interval between sending requests for a time update from a time server. (Range: 16-16384 seconds; Default: 16 seconds)
- **SNTP Server** – Sets the IP address for up to three time servers. The switch attempts to update the time from the first server, if this fails it attempts an update from the next server in the sequence.

Web – Select SNTP, Configuration. Modify any of the required parameters, and click Apply.

SNTP Configuration			
SNTP Client	<input checked="" type="checkbox"/> Enable		
SNTP Broadcast client	<input checked="" type="checkbox"/> Enable		
SNTP Poll Interval (16-16284)	16		
SNTP Server	10.1.0.19	137.82.140.80	128.250.36.2

Figure 3-20 SNTP Configuration

3 Configuring the Switch

CLI – This example configures the switch to operate as an SNTP client and then displays the current time and settings.

```
Console(config)#sntp client 4-53
Console(config)#sntp poll 16 4-55
Console(config)#sntp server 10.1.0.19 137.82.140.80 128.250.36.2 4-54
Console(config)#exit
Console#show sntp 4-55
Current time: Jan 6 14:56:05 2004
Poll interval: 60
Current mode: unicast
SNTP status : Enabled
SNTP server 10.1.0.19 137.82.140.80 128.250.36.2
Current server: 128.250.36.2
Console#
```

Setting the Time Zone

SNTP uses Coordinated Universal Time (or UTC, formerly Greenwich Mean Time, or GMT) based on the time at the Earth's prime meridian, zero degrees longitude. To display a time corresponding to your local time, you must indicate the number of hours and minutes your time zone is east (before) or west (after) of UTC.

Command Attributes

- **Current Time** – Displays the current time.
- **Name** – Assigns a name to the time zone. (Range: 1-29 characters)
- **Hours (0-13)** – The number of hours before/after UTC.
- **Minutes (0-59)** – The number of minutes before/after UTC.
- **Direction** – Configures the time zone to be before (east) or after (west) UTC.

Web – Select SNTP, Clock Time Zone. Set the offset for your time zone relative to the UTC, and click Apply.

Clock Time Zone

Current Time	Jan 1 05:43:00 2001
Name	<input type="text" value="Dhaka"/>
Hours(0~23)	<input type="text" value="6"/>
Minutes(0~59)	<input type="text" value="0"/>
Direction	<input type="radio"/> before-utc <input checked="" type="radio"/> after-utc

Figure 3-21 Clock Time Zone

CLI - This example shows how to set the time zone for the system clock.

```
Console(config)#clock timezone Dhaka hours 6 minute 0 after-UTC 4-56
Console#
```


Simple Network Management Protocol

Simple Network Management Protocol (SNMP) is a communication protocol designed specifically for managing devices on a network. Equipment commonly managed with SNMP includes switches, routers and host computers. SNMP is typically used to configure these devices for proper operation in a network environment, as well as to monitor them to evaluate performance or detect potential problems.

Managed devices supporting SNMP contain software, which runs locally on the device and is referred to as an agent. A defined set of variables, known as managed objects, is maintained by the SNMP agent and used to manage the device. These objects are defined in a Management Information Base (MIB) that provides a standard presentation of the information controlled by the agent. SNMP defines both the format of the MIB specifications and the protocol used to access this information over the network.

The switch includes an onboard agent that supports SNMP versions 1, 2c, and 3. This agent continuously monitors the status of the switch hardware, as well as the traffic passing through its ports. A network management station can access this information using software such as HP OpenView. Access to the onboard agent from clients using SNMP v1 and v2c is controlled by community strings. To communicate with the switch, the management station must first submit a valid community string for authentication.

Access to the switch using from clients using SNMPv3 provides additional security features that cover message integrity, authentication, and encryption; as well as controlling user access to specific areas of the MIB tree.

The SNMPv3 security structure consists of security models, with each model having it's own security levels. There are three security models defined, SNMPv1, SNMPv2c, and SNMPv3. Users are assigned to "groups" that are defined by a security model and specified security levels. Each group also has a defined security access to set of MIB objects for reading and writing, which are known as "views." The switch has a default view (all MIB objects) and default groups defined for security models v1 and v2c. The following table shows the security models and levels available and the system default settings.

Table 3-4 SNMPv3 Security Models and Levels

Model	Level	Group	Read View	Write View	Security
v1	noAuthNoPriv	public	defaultview	none	Community string only
v1	noAuthNoPriv	private	defaultview	defaultview	Community string only
v1	noAuthNoPriv	user defined	user defined	user defined	Community string only
v2c	noAuthNoPriv	public	defaultview	none	Community string only
v2c	noAuthNoPriv	private	defaultview	defaultview	Community string only
v2c	noAuthNoPriv	user defined	user defined	user defined	Community string only
v3	noAuthNoPriv	user defined	user defined	user defined	A user name match only

3 Configuring the Switch

Table 3-4 SNMPv3 Security Models and Levels (Continued)

Model	Level	Group	Read View	Write View	Security
v3	AuthNoPriv	user defined	user defined	user defined	Provides user authentication via MD5 or SHA algorithms
v3	AuthPriv	user defined	user defined	user defined	Provides user authentication via MD5 or SHA algorithms and data privacy using DES 56-bit encryption

Note: The predefined default groups and view can be deleted from the system. You can then define customized groups and views for the SNMP clients that require access.

Enabling the SNMP Agent

Enables SNMPv3 service for all management clients (i.e., versions 1, 2c, 3).

Command Attributes

- **SNMP Agent Status** – Enables SNMP on the switch.

Web – Click SNMP, Agent Status. Enable the SNMP Agent by marking the Enabled checkbox, and click Apply.



SNMP Agent Status

Snm Agent Status Enabled

Figure 3-22 Enabling the SNMP Agent

CLI – The following example enables SNMP on the switch.

```
Console (config) #snmp-server  
Console (config) #
```

4-113

Setting Community Access Strings

You may configure up to five community strings authorized for management access by clients using SNMP v1 and v2c. All community strings used for IP Trap Managers should be listed in this table. For security reasons, you should consider removing the default strings.

Command Attributes

- **SNMP Community Capability** – The switch supports up to five community strings.
- **Community String** – A community string that acts like a password and permits access to the SNMP protocol.

Default strings: “public” (read-only access), “private” (read/write access)

Range: 1-32 characters, case sensitive

- **Access Mode** – Specifies the access rights for the community string:
 - **Read-Only** – Authorized management stations are only able to retrieve MIB objects.
 - **Read/Write** – Authorized management stations are able to both retrieve and modify MIB objects.

Web – Click SNMP, Configuration. Add new community strings as required, select the access rights from the Access Mode drop-down list, then click Add.

The screenshot shows the 'SNMP Configuration' page. Under 'SNMP Community:', the 'SNMP Community Capability' is set to 5. There are two columns: 'Current' and 'New'. The 'Current' column contains a list with 'private RW' and 'public RO'. The 'New' column has a 'Community String' field with 'spiderman' and an 'Access Mode' dropdown menu set to 'Read/Write'. There are '<< Add' and 'Remove' buttons between the columns.

Figure 3-23 Configuring SNMP Community Strings

CLI – The following example adds the string “spiderman” with read/write access.

```
Console(config)#snmp-server community spiderman rw
Console(config)#
```

4-115

Specifying Trap Managers and Trap Types

Traps indicating status changes are issued by the switch to specified trap managers. You must specify trap managers so that key events are reported by this switch to your management station (using network management platforms such as HP OpenView). You can specify up to five management stations that will receive authentication failure messages and other trap messages from the switch.

Command Attributes

- **Trap Manager Capability** – This switch supports up to five trap managers.
- **Trap Manager IP Address** – IP address of a new management station to receive trap messages.
- **Trap Manager Community String** – Specifies a valid community string for the new trap manager entry. Though you can set this string in the Trap Managers table, we recommend that you define this string in the SNMP Configuration page (for Version 1 or 2c clients), or define a corresponding “User Name” in the SNMPv3 Users page (for Version 3 clients). (Range: 1-32 characters, case sensitive)
- **Trap UDP Port** – Specifies the UDP port number used by the trap manager.
- **Trap Version** – Indicates if the user is running SNMP v1, v2c, or v3. (Default: v1)

3 Configuring the Switch

- **Enable Authentication Traps** – Issues a trap message to specified IP trap managers whenever authentication of an SNMP request fails. (Default: Enabled)
- **Enable Link-up and Link-down Traps** – Issues a trap message whenever a port link is established or broken. (Default: Enabled)

Web – Click SNMP, Configuration. Enter the IP address and community string for each management station that will receive trap messages, specify the UDP port and SNMP version, and then click Add. Select the trap types required using the check boxes for Authentication and Link-up/down traps, and then click Apply.

Current:	New:
(none)	Trap Manager IP Address: 192.168.1.19
	Trap Manager Community String: private
	Trap UDP Port: 162
	Trap Version: 1

Enable Authentication Traps:

Enable Link-up and Link-down Traps:

Figure 3-24 Configuring SNMP Trap Managers

CLI – This example adds a trap manager and enables authentication traps.

```
Console(config)#snmp-server host 10.1.19.23 batman private version 2c
udp-port 162                                     4-117
Console(config)#snmp-server enable traps authentication 4-118
```

Configuring SNMPv3 Management Access

To configure SNMPv3 management access to the switch, follow these steps:

1. If you want to change the default engine ID, do so before configuring other SNMP parameters.
2. Specify read and write access views for the switch MIB tree.
3. Configure SNMP user groups with the required security model (i.e., SNMP v1, v2c or v3) and security level (i.e., authentication and privacy).
4. Assign SNMP users to groups, along with their specific authentication and privacy passwords.

Setting an Engine ID

An SNMPv3 engine is an independent SNMP agent that resides on the switch. This engine protects against message replay, delay, and redirection. The engine ID is also used in combination with user passwords to generate the security keys for authenticating and encrypting SNMPv3 packets.

A local engine ID is automatically generated that is unique to the switch. This is referred to as the default engine ID. If the local engineID is deleted or changed, all SNMP users will be cleared. You will need to reconfigure all existing users.

A new engine ID can be specified by entering 1 to 26 hexadecimal characters. If less than 26 characters are specified, trailing zeroes are added to the value. For example, the value "1234" is equivalent to "1234" followed by 22 zeroes.

Web – Click SNMP, SNMPv3, Engine ID. Enter an ID of up to 26 hexadecimal characters and then click Save.

Figure 3-25 Setting the SNMPv3 Engine ID

CLI – This example sets an SNMPv3 engine ID.

```

Console(config)#snmp-server engine-id local 12345abcdef      4-119
Console(config)#exit
Console#show snmp engine-id                                4-119
Local SNMP engineID: 12345abcdef0000000000000000
Local SNMP engineBoots: 1
Console#

```

Configuring SNMPv3 Users

Each SNMPv3 user is defined by a unique name. Users must be configured with a specific security level and assigned to a group. The SNMPv3 group restricts users to a specific read and a write view.

Command Attributes

- **User Name** – The name of user connecting to the SNMP agent. (Range: 1-32 characters)
- **Group Name** – The name of the SNMP group to which the user is assigned. (Range: 1-32 characters)
- **Security Model** – The user security model; SNMP v1, v2c or v3.
- **Security Level** – The security level used for the user:
 - noAuthNoPriv – There is no authentication or encryption used in SNMP communications. (This is the default for SNMPv3.)
 - AuthNoPriv – SNMP communications use authentication, but the data is not encrypted (only available for the SNMPv3 security model).

3 Configuring the Switch

- AuthPriv – SNMP communications use both authentication and encryption (only available for the SNMPv3 security model).
- **Authentication Protocol** – The method used for user authentication. (Options: MD5, SHA; Default: MD5)
- **Authentication Password** – A minimum of eight plain text characters is required.
- **Privacy Protocol** – The encryption algorithm use for data privacy; only 56-bit DES is currently available
- **Privacy Password** – A minimum of eight plain text characters is required.
- **Actions** – Enables the user to be assigned to another SNMPv3 group.

Web – Click SNMP, SNMPv3, Users. Click New to configure a user name. In the New User page, define a name and assign it to a group, then click Add to save the configuration and return to the User Name list. To delete a user, check the box next to the user name, then click Delete. To change the assigned group of a user, click Change Group in the Actions column of the users table and select the new group.

The screenshot displays the 'SNMPv3 Users' configuration page. At the top, there are 'New...' and 'Delete' buttons. Below is a table listing existing users:

	User Name	Group Name	Model	Level	Authentication	Privacy	Actions
<input type="checkbox"/>	david	DefaultROGroup	V1	noAuthNoPriv	None	None	Change Group...
<input type="checkbox"/>	chris	snmpv3users	V3	authPriv	MD5	DES56	Change Group...
<input type="checkbox"/>	steve	snmpv3users	V3	authNoPriv	MD5	None	Change Group...

Below the table are three sub-panels:

- SNMPv3 Users -- New**: A form for creating a new user. Fields include User Name, Group Name (with a radio button for 'snmpv3users'), Security Model (V1), Security Level (noAuthNoPriv), Authentication Protocol (MD5), Authentication Password, Data Privacy (DES56), and Privacy Password. Buttons for 'Back' and 'Add' are at the bottom.
- SNMPv3 Users -- Edit**: A form for editing an existing user. Fields include User Name (david) and Group Name (DefaultROGroup). Buttons for 'Back' and 'Change' are at the bottom.
- SNMPv3 Users -- Delete**: A form for deleting a user, which is partially visible and mostly obscured by the other panels.

Figure 3-26 Configuring SNMPv3 Users

CLI – Use the **snmp-server user** command to configure a new user name and assign it to a group.

```
Console(config)#snmp-server user chris group r&d v3 auth md5          4-124
  greenpeace priv des56 einstien
Console(config)#exit
Console#show snmp user                                             4-125
EngineId: 80000034030001f488f5200000
User Name: chris
Authentication Protocol: md5
Privacy Protocol: des56
Storage Type: nonvolatile
Row Status: active

Console#
```

Configuring SNMPv3 Groups

An SNMPv3 group sets the access policy for its assigned users, restricting them to specific read and write views. You can use the pre-defined default groups or create new groups to map a set of SNMP users to SNMP views.

Command Attributes

- **Group Name** – The name of the SNMP group. (Range: 1-32 characters)
- **Model** – The group security model; SNMP v1, v2c or v3.
- **Level** – The security level used for the group:
 - noAuthNoPriv – There is no authentication or encryption used in SNMP communications.
 - AuthNoPriv – SNMP communications use authentication, but the data is not encrypted (only available for the SNMPv3 security model).
 - AuthPriv – SNMP communications use both authentication and encryption (only available for the SNMPv3 security model).
- **Read View** – The configured view for read access. (Range: 1-64 characters)
- **Write View** – The configured view for write access. (Range: 1-64 characters)

3 Configuring the Switch

Web – Click SNMP, SNMPv3, Groups. Click New to configure a new group. In the New Group page, define a name, assign a security model and level, and then select read and write views. Click Add to save the new group and return to the Groups list. To delete a group, check the box next to the group name, then click Delete.

SNMPv3 Groups

New... Delete

<input type="checkbox"/>	Group Name	Model	Level	Read View	Write View
<input type="checkbox"/>	public	V1	noAuthNoPriv	defaultview	none
<input type="checkbox"/>	public	V2C	noAuthNoPriv	defaultview	none
<input type="checkbox"/>	private	V1			
<input type="checkbox"/>	private	V2C			

SNMPv3 Groups -- New

Group Properties:

Group Name:

Security Model:

Security Level:

SNMPv3 Views:

Read View:

Write View:

Back Add

Figure 3-27 Configuring SNMPv3 Groups

CLI – Use the `snmp-server group` command to configure a new group, specifying the security model and level, and restricting MIB access to defined read and write views.

```
Console(config)#snmp-server group v3secure v3 priv read
  defaultview write defaultview                                4-121
Console(config)#exit
Console#show snmp group                                       4-123
Group Name: v3secure
Security Model: v3
Read View: defaultview
Write View: defaultview
Notify View: none
Storage Type: nonvolatile
Row Status: active

Console#
```


Setting SNMPv3 Views

SNMPv3 views are used to restrict user access to specified portions of the MIB tree. The predefined view “defaultview” includes access to the entire MIB tree.

Command Attributes

- **View Name** – The name of the SNMP view. (Range: 1-64 characters)
- **View OID Subtrees** – Shows the currently configured object identifiers of branches within the MIB tree that define the SNMP view.
- **Edit OID Subtrees** – Allows you to configure the object identifiers of branches within the MIB tree. Wild cards can be used to mask a specific portion of the OID string.
- **Type** – Indicates if the object identifier of a branch within the MIB tree is included or excluded from the SNMP view.

Web – Click SNMP, SNMPv3, Views. Click New to configure a new view. In the New View page, define a name and specify OID subtrees in the switch MIB to be included or excluded in the view. Click Back to save the new view and return to the SNMPv3 Views list. For a specific view, click on View OID Subtrees to display the current configuration, or click on Edit OID Subtrees to make changes to the view settings. To delete a view, check the box next to the view name, then click Delete.

The screenshot displays the 'SNMPv3 Views' configuration page. At the top, there are 'New...' and 'Delete' buttons. Below is a table listing existing views:

	Name	OID Subtrees	Actions
<input type="checkbox"/>	readaccess	View OID Subtrees	[Edit OID Subtrees...]
<input type="checkbox"/>	defaultview	View OID Subtrees	[Edit OID Subtrees...]
<input type="checkbox"/>	writeaccess	View OID Subtrees	[Edit OID Subtrees...]

Two arrows point from the 'View OID Subtrees' links in the table to the 'SNMPv3 View -- Edit' dialog. The 'Edit' dialog has a 'View Name:' field and a 'Current:' list containing '1 (Included)'. It features '<< Add' and 'Remove' buttons. The 'New:' section includes an 'OID Subtree' input field and a 'Type' dropdown menu set to 'Included', with a 'Back' button.

Another arrow points from the 'Edit OID Subtrees...' link in the table to the 'SNMPv3 Views -- View' dialog. This dialog shows 'View : readaccess' and a table of its configuration:

OID Subtree	Type
1.3.6.1.2	Included

A 'Back' button is located below this table.

Figure 3-28 Configuring SNMPv3 Views

3 Configuring the Switch

CLI – Use the **snmp-server view** command to configure a new view. This example view includes the MIB-2 interfaces table, and the wildcard mask selects all index entries.

```
Console(config)#snmp-server view ifEntry.a 1.3.6.1.2.1.2.2.1.1.*      4-120
    included
Console(config)#exit
Console#show snmp view      4-121
View Name: ifEntry.a
Subtree OID: 1.3.6.1.2.1.2.2.1.1.*
View Type: included
Storage Type: nonvolatile
Row Status: active

View Name: readaccess
Subtree OID: 1.3.6.1.2
View Type: included
Storage Type: nonvolatile
Row Status: active

View Name: defaultview
Subtree OID: 1
View Type: included
Storage Type: nonvolatile
Row Status: active

Console#
```

User Authentication

You can restrict management access to this switch and provide secure network access using the following options:

- User Accounts – Manually configure management access rights for users.
- Authentication Settings – Use remote authentication to configure access rights.
- HTTPS Settings – Provide a secure web connection.
- SSH Settings – Provide a secure shell (for secure Telnet access).
- Port Security – Configure secure addresses for individual ports.
- 802.1X – Use IEEE 802.1X port authentication to control access to specific ports.
- IP Filter – Filters management access to the web, SNMP or Telnet interface.

Configuring User Accounts

The guest only has read access for most configuration parameters. However, the administrator has write access for all parameters governing the onboard agent. You should therefore assign a new administrator password as soon as possible, and store it in a safe place.

The default guest name is “guest” with the password “guest.” The default administrator name is “admin” with the password “admin.”

Command Attributes

- **Account List** – Displays the current list of user accounts and associated access levels. (Defaults: admin, and guest)
- **New Account** – Displays configuration settings for a new account.
 - **User Name** – The name of the user.
(Maximum length: 8 characters; maximum number of users: 16)
 - **Access Level** – Specifies the user level.
(Options: Normal and Privileged)
 - **Password** – Specifies the user password.
(Range: 0-8 characters plain text, case sensitive)
- **Change Password** – Sets a new password for the specified user.

Web – Click Security, User Accounts. To configure a new user account, enter the user name, access level, and password, then click Add. To change the password for a specific user, enter the user name and new password, confirm the password by entering it again, then click Apply.

User Accounts

Account List

admin (Privileged)
 guest (Normal)

<< Add
Remove

New Account

User Name	<input type="text" value="mike"/>
Access Level	Normal ▾
Password	<input type="password" value="AAAAAAAAAA"/>
Confirm Password	<input type="password" value="AAAAAAAAAA"/>

Change Password

User Name	<input type="text"/>	
New Password	<input type="password"/>	
Confirm Password	<input type="password"/>	Change

Figure 3-29 User Accounts

CLI – Assign a user name to access-level 15 (i.e., administrator), then specify the password.

```

Console(config)#username bob access-level 15
Console(config)#username bob password 0 smith
Console(config)#
  
```

4-27

Configuring Local/Remote Logon Authentication


Use the Authentication Settings menu to restrict management access based on specified user names and passwords. You can manually configure access rights on the switch, or you can use a remote access authentication server based on RADIUS or TACACS+ protocols.

Remote Authentication Dial-in User Service (RADIUS) and Terminal Access Controller Access Control System Plus (TACACS+) are logon authentication protocols that use software running on a central server to control access to RADIUS-aware or TACACS-aware devices on the network.

An authentication server contains

a database of multiple user name/password pairs with associated privilege levels for each user that requires management access to the switch.

RADIUS uses UDP while TACACS+ uses TCP. UDP only offers best effort delivery, while TCP offers a connection-oriented transport. Also, note that RADIUS encrypts only the password in the access-request packet from the client to the server, while TACACS+ encrypts the entire body of the packet.

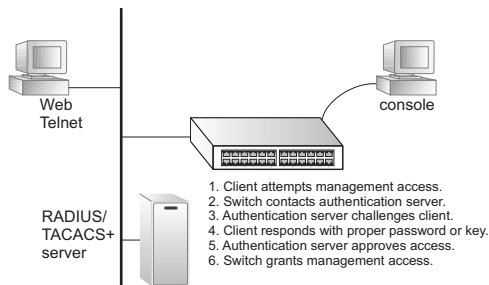

Command Usage

- By default, management access is always checked against the authentication database stored on the local switch. If a remote authentication server is used, you must specify the authentication sequence and the corresponding parameters for the remote authentication protocol. Local and remote logon authentication control management access via the console port, web browser, or Telnet.
- RADIUS and TACACS+ logon authentication assign a specific privilege level for each user name/password pair. The user name, password, and privilege level must be configured on the authentication server.
- You can specify up to three authentication methods for any user to indicate the authentication sequence. For example, if you select (1) RADIUS, (2) TACACS and (3) Local, the user name and password on the RADIUS server is verified first. If the RADIUS server is not available, then authentication is attempted using the TACACS+ server, and finally the local user name and password is checked.

Command Attributes

- **Authentication** – Select the authentication, or authentication sequence required:
 - **Local** – User authentication is performed only locally by the switch.
 - **Radius** – User authentication is performed using a RADIUS server only.
 - **TACACS** – User authentication is performed using a TACACS+ server only.
 - [authentication sequence] – User authentication is performed by up to three authentication methods in the indicated sequence.

- **RADIUS Settings**

- **Server IP Address** – Address of authentication server. (Default: 10.1.0.1)
- **Server Port Number** – Network (UDP) port of authentication server used for authentication messages. (Range: 1-65535; Default: 1812)
- **Secret Text String** – Encryption key used to authenticate logon access for client. Do not use blank spaces in the string. (Maximum length: 20 characters)
- **Number of Server Transmits** – Number of times the switch tries to authenticate logon access via the authentication server. (Range: 1-30; Default: 2)
- **Timeout for a reply** – The number of seconds the switch waits for a reply from the RADIUS server before it resends the request. (Range: 1-65535; Default: 5)

- **TACACS Settings**

- **Server IP Address** – Address of the TACACS+ server. (Default: 10.11.12.13)
- **Server Port Number** – Network (TCP) port of TACACS+ server used for authentication messages. (Range: 1-65535; Default: 49)
- **Secret Text String** – Encryption key used to authenticate logon access for client. Do not use blank spaces in the string. (Maximum length: 20 characters)

Note: The local switch user database has to be set up by manually entering user names and passwords using the CLI. (See “username” on page 4-27.)

Web – Click Security, Authentication Settings. To configure local or remote authentication preferences, specify the authentication sequence (i.e., one to three methods), fill in the parameters for RADIUS or TACACS+ authentication if selected, and click Apply.

Authentication Settings

Authentication	TACACS, RADIUS, Local ▼
RADIUS Settings:	
Server IP Address	<input type="text" value="10.1.0.1"/>
Server Port Number	<input type="text" value="1812"/>
Secret Text String	<input type="text" value="XXXXXXXXXX"/>
Number of Server Transmits	<input type="text" value="2"/>
Timeout for a reply (sec)	<input type="text" value="5"/>
TACACS Settings:	
Server IP Address	<input type="text" value="10.11.12.13"/>
Server Port Number	<input type="text" value="49"/>
Secret Text String	<input type="text" value="XXXXXXXXXX"/>

Figure 3-30 Authentication Server Settings

3 Configuring the Switch

CLI – Specify all the required parameters to enable logon authentication.

```
Console(config)#authentication login radius 4-70
Console(config)#radius-server host 192.168.1.25 4-72
Console(config)#radius-server port 181 4-73
Console(config)#radius-server key green 4-73
Console(config)#radius-server retransmit 5 4-74
Console(config)#radius-server timeout 10 4-74
Console#show radius-server 4-74
Server IP address: 192.168.1.25
Communication key with radius server:
Server port number: 181
Retransmit times: 5
Request timeout: 10
Console(config)#authentication login tacacs 4-70
Console(config)#tacacs-server host 10.20.30.40 4-75
Console(config)#tacacs-server port 200 4-76
Console(config)#tacacs-server key green 4-76
Console#show tacacs-server 4-77
Server IP address: 10.20.30.40
Communication key with tacacs server: green
Server port number: 200
Console(config)#
```

Configuring HTTPS

You can configure the switch to enable the Secure Hypertext Transfer Protocol (HTTPS) over the Secure Socket Layer (SSL), providing secure access (i.e., an encrypted connection) to the switch's web interface.

Command Usage

- Both the HTTP and HTTPS service can be enabled independently on the switch. However, you cannot configure both services to use the same UDP port.
- If you enable HTTPS, you must indicate this in the URL that you specify in your browser: `https://device[:port_number]`
- When you start HTTPS, the connection is established in this way:
 - The client authenticates the server using the server's digital certificate.
 - The client and server negotiate a set of security protocols to use for the connection.
 - The client and server generate session keys for encrypting and decrypting data.
- The client and server establish a secure encrypted connection.
A padlock icon should appear in the status bar for Internet Explorer 5.x or above and Netscape Navigator 6.2 or above.

- The following web browsers and operating systems currently support HTTPS:

Table 3-5 HTTPS System Support

Web Browser	Operating System
Internet Explorer 5.0 or later	Windows 98, Windows NT (with service pack 6a), Windows 2000, Windows XP
Netscape Navigator 6.2 or later	Windows 98, Windows NT (with service pack 6a), Windows 2000, Windows XP, Solaris 2.6

- To specify a secure-site certificate, see “Replacing the Default Secure-site Certificate” on page 3-49.

Command Attributes

- **HTTPS Status** – Allows you to enable/disable the HTTPS server feature on the switch. (Default: Enabled)
- **Change HTTPS Port Number** – Specifies the UDP port number used for HTTPS/SSL connection to the switch’s web interface. (Default: Port 443)

Web – Click Security, HTTPS Settings. Enable HTTPS and specify the port number, then click Apply.

Figure 3-31 HTTPS Settings

CLI – This example enables the HTTP secure server and modifies the port number.

```
Console(config)#ip http secure-server          4 - 32
Console(config)#ip http secure-port 441       4 - 33
Console(config)#
```

Replacing the Default Secure-site Certificate

When you log onto the web interface using HTTPS (for secure access), a Secure Sockets Layer (SSL) certificate appears for the switch. By default, the certificate that Netscape and Internet Explorer display will be associated with a warning that the site is not recognized as a secure site. This is because the certificate has not been signed by an approved certification authority. If you want this warning to be replaced by a message confirming that the connection to the switch is secure, you must obtain a unique certificate and a private key and password from a recognized certification authority.

Caution: For maximum security, we recommend you obtain a unique Secure Sockets Layer certificate at the earliest opportunity. This is because the default certificate for the switch is not unique to the hardware you have purchased.

3 Configuring the Switch

When you have obtained these, place them on your TFTP server, and use the following command at the switch's command-line interface to replace the default (unrecognized) certificate with an authorized one:

```
Console#copy tftp https-certificate 4-64  
TFTP server ip address: <server ip-address>  
Source certificate file name: <certificate file name>  
Source private file name: <private key file name>  
Private password: <password for private key>
```

Note: The switch must be reset for the new certificate to be activated. To reset the switch, type “reload” at the command prompt: `Console#reload`

Configuring the Secure Shell

The Berkeley-standard includes remote access tools originally designed for Unix systems. Some of these tools have also been implemented for Microsoft Windows and other environments. These tools, including commands such as *rlogin* (remote login), *rsh* (remote shell), and *rcp* (remote copy), are not secure from hostile attacks.

The Secure Shell (SSH) includes server/client applications intended as a secure replacement for the older Berkeley remote access tools. SSH can also provide remote management access to this switch as a secure replacement for Telnet. When the client contacts the switch via the SSH protocol, the switch generates a public-key that the client uses along with a local user name and password for access authentication. SSH also encrypts all data transfers passing between the switch and SSH-enabled management station clients, and ensures that data traveling over the network arrives unaltered.

Note that you need to install an SSH client on the management station to access the switch for management via the SSH protocol.

Note: The switch supports both SSH Version 1.5 and 2.0 clients.

Command Usage

The SSH server on this switch supports both password and public key authentication. If password authentication is specified by the SSH client, then the password can be authenticated either locally or via a RADIUS or TACACS+ remote authentication server, as specified on the **Authentication Settings** page (page 3-46). If public key authentication is specified by the client, then you must configure authentication keys on both the client and the switch as described in the following section. Note that regardless of whether you use public key or password authentication, you still have to generate authentication keys on the switch (SSH Host Key Settings) and enable the SSH server (Authentication Settings).

To use the SSH server, complete these steps:

1. *Generate a Host Key Pair* – On the SSH Host Key Settings page, create a host public/private key pair.
2. *Provide Host Public Key to Clients* – Many SSH client programs automatically import the host public key during the initial connection setup with the switch.

Otherwise, you need to manually create a known hosts file on the management station and place the host public key in it. An entry for a public key in the known hosts file would appear similar to the following example:

```
10.1.0.54 1024 35 15684995401867669259333946775054617325313674890836547254
15020245593199868544358361651999923329781766065830956 10825913212890233
76546801726272571413428762941301196195566782 59566410486957427888146206
51941746772984865468615717739390164779355942303577413098022737087794545
24083971752646358058176716709574804776117
```

3. *Import Client's Public Key to the Switch* – Use the **copy ftp public-key** command (page 4-64) to copy a file containing the public key for all the SSH client's granted management access to the switch. (Note that these clients must be configured locally on the switch via the User Accounts page as described on page 3-44.) The clients are subsequently authenticated using these keys. The current firmware only accepts public key files based on standard UNIX format as shown in the following example for an RSA Version 1 key:

```
1024 35 1341081685609893921040944920155425347631641921872958921143173880
05553616163105177594083868631109291232226828519254374603100937187721199
69631781366277414168985132049117204830339254324101637997592371449011938
00609025394840848271781943722884025331159521348610229029789827213532671
31629432532818915045306393916643 steve@192.168.1.19
```

4. *Set the Optional Parameters* – On the SSH Settings page, configure the optional parameters, including the authentication timeout, the number of retries, and the server key size.
5. *Enable SSH Service* – On the SSH Settings page, enable the SSH server on the switch.
6. *Challenge-Response Authentication* – When an SSH client attempts to contact the switch, the SSH server uses the host key pair to negotiate a session key and encryption method. Only clients that have a private key corresponding to the public keys stored on the switch can access it. The following exchanges take place during this process:
 - a. The client sends its public key to the switch.
 - b. The switch compares the client's public key to those stored in memory.
 - c. If a match is found, the switch uses the public key to encrypt a random sequence of bytes, and sends this string to the client.
 - d. The client uses its private key to decrypt the bytes, and sends the decrypted bytes back to the switch.
 - e. The switch compares the decrypted bytes to the original bytes it sent. If the two sets match, this means that the client's private key corresponds to an authorized public key, and the client is authenticated.

3 Configuring the Switch

- Notes:**
1. To use SSH with only password authentication, the host public key must still be given to the client, either during initial connection or manually entered into the known host file. However, you do not need to configure the client's keys.
 2. The SSH server supports up to four client sessions. The maximum number of client sessions includes both current Telnet sessions and SSH sessions.

Generating the Host Key Pair

A host public/private key pair is used to provide secure communications between an SSH client and the switch. After generating this key pair, you must provide the host public key to SSH clients and import the client's public key to the switch as described in the preceding section (Command Usage).

Field Attributes

- **Public-Key of Host-Key** – The public key for the host.
 - RSA (Version 1): The first field indicates the size of the host key (e.g., 1024), the second field is the encoded public exponent (e.g., 65537), and the last string is the encoded modulus.
 - DSA (Version 2): The first field indicates that the encryption method used by SSH is based on the Digital Signature Standard (DSS). The last string is the encoded modulus.
- **Host-Key Type** – The key type used to generate the host key pair (i.e., public and private keys). (Range: RSA (Version 1), DSA (Version 2), Both: Default: RSA) The SSH server uses RSA or DSA for key exchange when the client first establishes a connection with the switch, and then negotiates with the client to select either DES (56-bit) or 3DES (168-bit) for data encryption.
- **Save Host-Key from Memory to Flash** – Saves the host key from RAM (i.e., volatile memory to flash memory). Otherwise, the host key pair is stored to RAM by default. Note that you must select this item prior to generating the host-key pair.
- **Generate** – This button is used to generate the host key pair. Note that you must first generate the host key pair before you can enable the SSH server on the SSH Server Settings page.
- **Clear** – This button clears the host key from both volatile memory (RAM) and non-volatile memory (Flash).

Web – Click Security, SSH, Host-Key Settings. Select the host-key type from the drop-down box, select the option to save the host key from memory to flash (if required) prior to generating the key, and then click Generate.

SSH Host-Key Settings

Public-Key of Host-Key

RSA

```
1024 65537
1309178972 6747896161521117127649791962962115516424227680280725103864048338276358290698941935742287566
18530762280995314139213790022103947374394173 68512447371756369962704297907064627111321882467751081589
04315863193489542002094633406761281150405946811464259257326509438403478583707539552641232928004845007
811621891
```

DSA

```
ssh-dss AAAAB3NzaC1kc3MAAACBAN6zwIqCqDb3869jYVXLM1sHL0EcE/Re6hlasfBthIwmj
hLY400jqJZpcEQUgCFYlum0Y2uoLka+Py9ieGWQ8f2gobUZKIIcUKg6vjO9XTs7XXc05xfzkBi
KviDa+2OrIz6UK+6vFOgVUDFedlnixYTVo+h5v8r0ea2rpn06DkZAAAAFQCNZn/xl7dwpW8RrV
DQnSWw4Qk+6QAAAIEAptkGeB6B5hwagH4gUOCY6i1TmrmsiJgfw09oQRPUMbCAkCC+uzxatOo7
drnIzypMx+Sx5RUDMGgKS+9ywsalcWqHeFY5ilc3LDCNBueeLykZzVS+RS+azTKIk/zrJh8GLG
Nq375R55yRxPvmcGin/Q71phPgyJ3o9MK8LFDfmJEAAACAL8A6tESiswP20FqX7VG0EbzVDSOI
RTMFy3iUxtvGyQA0V5y67Mfc3lMtgcPRUOYXDiwIBp5NXgilCg5z7VgqbmRm28mWc5a//f8TUA9
PNWKV6W0hqmqshQdotVzDR1e+XKNTZj0uTwwfj05Kyt4dn4MdoTHgrbl/DMDAfjnte8MZZS=
```

Host-Key Type:

Save Host-Key from Memory to Flash

Figure 3-32 SSH Host-Key Settings

CLI – This example generates a host-key pair using both the RSA and DSA algorithms, stores the keys to flash memory, and then displays the host's public keys.

```
Console#ip ssh crypto host-key generate 4 - 37
Console#ip ssh save host-key 4 - 37
Console#show public-key host 4 - 37
Host:
RSA:
1024 65537 127250922544926402131336514546131189679055192360076028653006761
824096909474483220102524878965977592168322225584652387791546479807396314033
86925793105105765212243052807865885485789272602937866089236841423275912127
60325919683697053439336438445223335188287173896894511729290510813919642025
190932104328579045764891
DSA:
ssh-dss AAAAB3NzaC1kc3MAAACBAN6zwIqCqDb3869jYVXLM1sHL0EcE/Re6hlasfBthIwmj
hLY400jqJZpcEQUgCFYlum0Y2uoLka+Py9ieGWQ8f2gobUZKIIcUKg6vjO9XTs7XXc05xfzkBi
KviDa+2OrIz6UK+6vFOgVUDFedlnixYTVo+h5v8r0ea2rpn06DkZAAAAFQCNZn/xl7dwpW8RrV
DQnSWw4Qk+6QAAAIEAptkGeB6B5hwagH4gUOCY6i1TmrmsiJgfw09oQRPUMbCAkCC+uzxatOo7
drnIzypMx+Sx5RUDMGgKS+9ywsalcWqHeFY5ilc3LDCNBueeLykZzVS+RS+azTKIk/zrJh8GLG
Nq375R55yRxPvmcGin/Q71phPgyJ3o9MK8LFDfmJEAAACAL8A6tESiswP20FqX7VG0EbzVDSOI
RTMFy3iUxtvGyQA0V5y67Mfc3lMtgcPRUOYXDiwIBp5NXgilCg5z7VgqbmRm28mWc5a//f8TUA9
PNWKV6W0hqmqshQdotVzDR1e+XKNTZj0uTwwfj05Kyt4dn4MdoTHgrbl/DMDAfjnte8MZZS=
Console#
```

3 Configuring the Switch

Configuring the SSH Server

The SSH server includes basic settings for authentication.

Field Attributes

- **SSH Server Status** – Allows you to enable/disable the SSH server on the switch. (Default: Disabled)
- **Version** – The Secure Shell version number. Version 2.0 is displayed, but the switch supports management access via either SSH Version 1.5 or 2.0 clients.
- **SSH Authentication Timeout** – Specifies the time interval in seconds that the SSH server waits for a response from a client during an authentication attempt. (Range: 1 to 120 seconds; Default: 120 seconds)
- **SSH Authentication Retries** – Specifies the number of authentication attempts that a client is allowed before authentication fails and the client has to restart the authentication process. (Range: 1-5 times; Default: 3)
- **SSH Server-Key Size** – Specifies the SSH server key size. (Range: 512-896 bits; Default: 768)
 - The server key is a private key that is never shared outside the switch.
 - The host key is shared with the SSH client, and is fixed at 1024 bits.

Web – Click Security, SSH, Settings. Enable SSH and adjust the authentication parameters as required, then click Apply. Note that you must first generate the host key pair on the SSH Host-Key Settings page before you can enable the SSH server.

SSH Server Settings

SSH Server Status	Enabled ▾
Version	2.0
SSH Authentication Timeout (1-120)	100 seconds
SSH Authentication Retries (1-5)	5
SSH Server-Key Size (512-896)	512

Figure 3-33 SSH Server Settings

CLI – This example enables SSH, sets the authentication parameters, and displays the current configuration. It shows that the administrator has made a connection via SSH, and then disables this connection.

```

Console(config)#ip ssh server                                4-37
Console(config)#ip ssh timeout 100                          4-38
Console(config)#ip ssh authentication-retries 5             4-38
Console(config)#ip ssh server-key size 512                  4-39
Console(config)#end
Console#show ip ssh                                          4-41
SSH Enabled - version 2.0
Negotiation timeout: 120 secs; Authentication retries: 3
Server key size: 768 bits
Console#show ssh                                             4-42
Information of secure shell
Session Username Version Encrypt method Negotiation state
-----
0      admin    2.0      cipher-3des    session-started
Console#disconnect 0                                        4-19
Console#

```

Configuring Port Security

Port security is a feature that allows you to configure a switch port with one or more device MAC addresses that are authorized to access the network through that port.

When port security is enabled on a port, the switch stops learning new MAC addresses on the specified port when it has reached a configured maximum number. Only incoming traffic with source addresses already stored in the dynamic or static address table will be accepted as authorized to access the network through that port. If a device with an unauthorized MAC address attempts to use the switch port, the intrusion will be detected and the switch can automatically take action by disabling the port and sending a trap message.

To use port security, specify a maximum number of addresses to allow on the port and then let the switch dynamically learn the <source MAC address, VLAN> pair for frames received on the port. Note that you can also manually add secure addresses to the port using the Static Address Table (page 3-96). When the port has reached the maximum number of MAC addresses the selected port will stop learning. The MAC addresses already in the address table will be retained and will not age out. Any other device that attempts to use the port will be prevented from accessing the switch.

Command Usage

- A secure port has the following restrictions:
 - It cannot use port monitoring.
 - It cannot be a multi-VLAN port.
 - It cannot be used as a member of a static or dynamic trunk.
 - It should not be connected to a network interconnection device.
- The default maximum number of MAC addresses allowed on a secure port is zero. You must configure a maximum address count from 1 - 1024 for the port to allow access.

3 Configuring the Switch

- If a port is disabled (shut down) due to a security violation, it must be manually re-enabled from the Port/Port Configuration page (page 3-81).

Command Attributes

- **Port** – Port number.
- **Name** – Descriptive text (page 4-150).
- **Action** – Indicates the action to be taken when a port security violation is detected:
 - **None**: No action should be taken. (This is the default.)
 - **Trap**: Send an SNMP trap message.
 - **Shutdown**: Disable the port.
 - **Trap and Shutdown**: Send an SNMP trap message and disable the port.
- **Security Status** – Enables or disables port security on the port. (Default: Disabled)
- **Max MAC Count** – The maximum number of MAC addresses that can be learned on a port. (Range: 0 - 1024, where 0 means disabled)
- **Trunk** – Trunk number if port is a member (page 3-85 and 3-86).

Web – Click Security, Port Security. Set the action to take when an invalid address is detected on a port, mark the checkbox in the Status column to enable security for a port, set the maximum number of MAC addresses allowed on a port, and click Apply.

Port Security

Configuration:

Port	Name	Action	Security Status	Max MAC Count (0-1024)	Trunk
1		None	<input type="checkbox"/> Enabled	0	
2		None	<input type="checkbox"/> Enabled	0	
3		None	<input type="checkbox"/> Enabled	0	
4		None	<input type="checkbox"/> Enabled	0	
5		Trap and Shutdown	<input checked="" type="checkbox"/> Enabled	20	
6		None	<input type="checkbox"/> Enabled	0	
7		None	<input type="checkbox"/> Enabled	0	
8		None	<input type="checkbox"/> Enabled	0	
9		None	<input type="checkbox"/> Enabled	0	
10		None	<input type="checkbox"/> Enabled	0	
11		None	<input type="checkbox"/> Enabled	0	
12		None	<input type="checkbox"/> Enabled	0	

Figure 3-34 Port Security

CLI – This example selects the target port, sets the port security action to send a trap and disable the port, specifies a maximum address count, and then enables port security for the port.

```
Console(config)#interface ethernet 1/5
Console(config-if)#port security action trap-and-shutdown
Console(config-if)#port security max-mac-count 20
Console(config-if)#port security
Console(config-if)#
```


4-78

Configuring 802.1X Port Authentication

Network switches can provide open and easy access to network resources by simply attaching a client PC. Although this automatic configuration and access is a desirable feature, it also allows unauthorized personnel to easily intrude and possibly gain access to sensitive network data.

The IEEE 802.1X (dot1x) standard defines a port-based access control procedure that prevents unauthorized access to a network by requiring users to first submit credentials for authentication. Access to all switch ports in a network can be centrally controlled from a server, which means that authorized users can use the same credentials for authentication from any point within the network.

This switch uses the Extensible Authentication Protocol over LANs (EAPOL) to exchange authentication protocol messages with the client, and a remote RADIUS authentication server to verify user identity and access rights. When a client (i.e., Supplicant) connects to a switch port, the switch (i.e.,

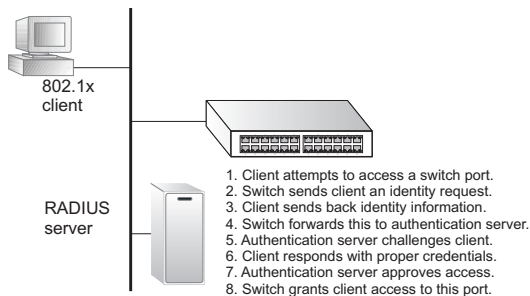

Authenticator) responds with an EAPOL identity request. The client provides its identity (such as a user name) in an EAPOL response to the switch, which it forwards to the RADIUS server. The RADIUS server verifies the client identity and sends an access challenge back to the client. The EAP packet from the RADIUS server contains not only the challenge, but the authentication method to be used. The client can reject the authentication method and request another, depending on the configuration of the client software and the RADIUS server. The authentication method must be MD5. (TLS, TTLS and PEAP will be supported in future releases.) The client responds to the appropriate method with its credentials, such as a password or certificate. The RADIUS server verifies the client credentials and responds with an accept or reject packet. If authentication is successful, the switch allows the client to access the network. Otherwise, network access is denied and the port remains blocked.

3 Configuring the Switch

The operation of dot1x on the switch requires the following:

- The switch must have an IP address assigned.
- RADIUS authentication must be enabled on the switch and the IP address of the RADIUS server specified.
- Each switch port that will be used must be set to dot1x “Auto” mode.
- Each client that needs to be authenticated must have dot1x client software installed and properly configured.
- The RADIUS server and 802.1X client support EAP. (The switch only supports EAPOL in order to pass the EAP packets from the server to the client.)
- The RADIUS server and client also have to support the same EAP authentication type – MD5. (Some clients have native support in Windows, otherwise the dot1x client must support it.)

Displaying 802.1X Global Settings

The dot1x protocol includes global parameters that control the client authentication process that runs between the client and the switch (i.e., authenticator), as well as the client identity lookup process that runs between the switch and authentication server. These parameters are described in this section.

Command Attributes

- **802.1X Re-Authentication** – Indicates if switch port requires a client to be re-authenticated after a certain period of time.
- **802.1X Max Request Count** – The maximum number of times the switch port will retransmit an EAP request packet to the client before it times out the authentication session.
- **Timeout for Quiet Period** – Indicates the time that a switch port waits after the Max Request Count has been exceeded before attempting to acquire a new client.
- **Timeout for Re-Authentication Period** – Indicates the time period after which a connected client must be re-authenticated.
- **Timeout for Tx Period** – The time period during an authentication session that the switch waits before re-transmitting an EAP packet.
- **Supplicant Timeout** – The time the switch waits for a client response to an EAP request.
- **Server Timeout** – The time the switch waits for a response from the authentication server (RADIUS) to an authentication request.
- **Re-Authentication Max Count** – The number of times the switch will attempt to re-authenticate a connected client before the port becomes unauthorized.

Web – Click 802.1X, Information.

802.1X Information	
802.1X Re-Authentication	Disabled
802.1X Max Request Count	2
Timeout for Quiet Period	60 seconds
Timeout for Re-Authentication Period	3600 seconds
Timeout for Tx Period	30 seconds
Supplicant Timeout	30 seconds
Server Timeout	10 seconds
Re-Authentication Max Count	2

Figure 3-35 802.1X Information

CLI – This example shows the default protocol settings for dot1x. For a description of the additional entries displayed in the CLI, see “show dot1x” on page 4-85.

```

Console#show dot1x 4-85
Global 802.1X Parameters
  reauth-enabled: yes
  reauth-period: 300
  quiet-period: 350
  tx-period: 300
  supp-timeout: 30
  server-timeout: 30
  reauth-max: 2
  max-req: 2

802.1X Port Summary
  Port Name      Status      Operation Mode      Mode      Authorized
  1/1            disabled   Single-Host        ForceAuthorized  n/a
  1/2            disabled   Single-Host        ForceAuthorized  n/a
  :
  :
  1/23          disabled   Single-Host        ForceAuthorized  yes
  1/24          enabled    Single-Host        Auto             yes

802.1X Port Details

802.1X is disabled on port 1
:

802.1X is enabled on port 24
Status                Authorized
Operation mode        Single-Host
Max count              5
Port-control          Auto
Supplicant             00-e0-29-94-34-65
Current Identifier     4

Authenticator State   Machine
State                 Authenticated
Reauth Count          0
  
```

3 Configuring the Switch

```
Backend State Machine
State                Idle
Request Count        0
Identifier(Server)   3

Reauthentication State Machine
State                Initialize
Console#
```

Configuring 802.1X Global Settings

The dot1x protocol includes global parameters that control the client authentication process that runs between the client and the switch (i.e., authenticator), as well as the client identity lookup process that runs between the switch and authentication server. The configuration options for these parameters are described in this section.

Command Attributes

- **802.1X Re-Authentication** – Sets the client to be re-authenticated after the interval specified by the Timeout for Re-authentication Period. Re-authentication can be used to detect if a new device is plugged into a switch port. (Default: Disabled)
- **802.1X Max Request Count** – Sets the maximum number of times the switch port will retransmit an EAP request packet to the client before it times out the authentication session. (Range: 1-10; Default 2)
- **Timeout for Quiet Period** – Sets the time that a switch port waits after the dot1X Max Request Count has been exceeded before attempting to acquire a new client. (Range: 1-65535 seconds; Default: 60 seconds)
- **Timeout for Re-Authentication Period** – Sets the time period after which a connected client must be re-authenticated. (Range: 1-65535 seconds; Default: 3600 seconds)
- **Timeout for Tx Period** – Sets the time period during an authentication session that the switch waits before re-transmitting an EAP packet. (Range: 1-65535; Default: 30 seconds)
- **authentication dot1x default⁵** – Sets the default authentication server type. Note that the specified authentication server type must be enabled and properly configured for dot1x to function properly. (Options: radius).

5. CLI only.

Web – Select Security, 802.1X, Configuration. Enable dot1x globally for the switch, modify any of the parameters required, and then click Apply.

802.1X Configuration

802.1X Re-Authentication	<input type="checkbox"/> Enabled
802.1X Max Request Count (1-10)	<input style="width: 50px;" type="text" value="2"/>
Timeout for Quiet Period (1-65535)	<input style="width: 50px;" type="text" value="60"/> seconds
Timeout for Re-Authentication Period (1-65535)	<input style="width: 50px;" type="text" value="3600"/> seconds
Timeout for Tx Period (1-65535)	<input style="width: 50px;" type="text" value="30"/> seconds

Figure 3-36 802.1X Configuration

CLI – This enables re-authentication and sets all of the global parameters for dot1x.

```

Console(config)#dot1x re-authentication           4-83
Console(config)#dot1x max-req 5                  4-80
Console(config)#dot1x timeout quiet-period 40    4-83
Console(config)#dot1x timeout re-auth 5         4-84
Console(config)#dot1x timeout tx-period 40     4-84
Console(config)#authentication dot1x default radius 4-80
Console(config)#
```

Configuring Port Authorization Mode

When dot1x is enabled, you need to specify the dot1x authentication mode configured for each port.


Command Attributes

- **Status** – Indicates if authentication is enabled or disabled on the port.
- **Operation Mode** – Allows single or multiple hosts (clients) to connect to an 802.1X-authorized port. (Range: Single-Host, Multi-Host; Default: Single-Host)
- **Max Count** – The maximum number of hosts that can connect to a port when the Multi-Host operation mode is selected. (Range: 1-1024; Default: 5)
- **Mode** – Sets the authentication mode to one of the following options:
 - **Auto** – Requires a dot1x-aware client to be authorized by the authentication server. Clients that are not dot1x-aware will be denied access.
 - **Force-Authorized** – Forces the port to grant access to all clients, either dot1x-aware or otherwise. (This is the default setting.)
 - **Force-Unauthorized** – Forces the port to deny access to all clients, either dot1x-aware or otherwise.
- **Authorized** –
 - **Yes** – Connected client is authorized.
 - **No** – Connected client is not authorized.
 - **Blank** – Displays nothing when dot1x is disabled on a port.

3 Configuring the Switch

- **Supplicant** – Indicates the MAC address of a connected client.
- **Trunk** – Indicates if the port is configured as a trunk port.

Web – Click Security, 802.1X, Port Configuration. Modify the parameters required, and click Apply.

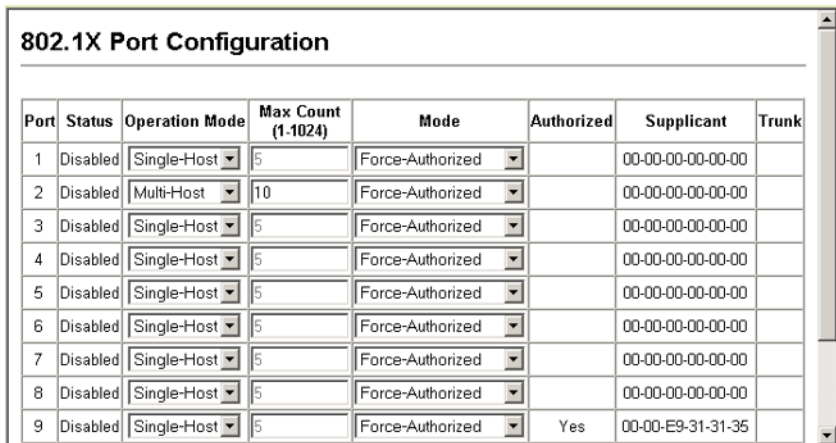

Port	Status	Operation Mode	Max Count (1-1024)	Mode	Authorized	Supplicant	Trunk
1	Disabled	Single-Host	5	Force-Authorized		00-00-00-00-00-00	
2	Disabled	Multi-Host	10	Force-Authorized		00-00-00-00-00-00	
3	Disabled	Single-Host	5	Force-Authorized		00-00-00-00-00-00	
4	Disabled	Single-Host	5	Force-Authorized		00-00-00-00-00-00	
5	Disabled	Single-Host	5	Force-Authorized		00-00-00-00-00-00	
6	Disabled	Single-Host	5	Force-Authorized		00-00-00-00-00-00	
7	Disabled	Single-Host	5	Force-Authorized		00-00-00-00-00-00	
8	Disabled	Single-Host	5	Force-Authorized		00-00-00-00-00-00	
9	Disabled	Single-Host	5	Force-Authorized	Yes	00-00-E9-31-31-35	

Figure 3-37 802.1X Port Configuration

CLI – This example sets the authentication mode to enable 802.1X on port 2, and allows up to ten clients to connect to this port.

```
Console(config)#interface ethernet 1/2 4-149
Console(config-if)#dot1x port-control auto 4-81
Console(config-if)#dot1x operation-mode multi-host max-count 10 4-82
Console(config-if)#
```

Displaying 802.1X Statistics

This switch can display statistics for dot1x protocol exchanges for any port.

Table 3-6 802.1X Statistics

Parameter	Description
Rx EAPOL Start	The number of EAPOL Start frames that have been received by this Authenticator.
Rx EAPOL Logoff	The number of EAPOL Logoff frames that have been received by this Authenticator.
Rx EAPOL Invalid	The number of EAPOL frames that have been received by this Authenticator in which the frame type is not recognized.
Rx EAPOL Total	The number of valid EAPOL frames of any type that have been received by this Authenticator.
Rx EAP Resp/Id	The number of EAP Resp/Id frames that have been received by this Authenticator.

Table 3-6 802.1X Statistics (Continued)

Parameter	Description
Rx EAP Resp/Oth	The number of valid EAP Response frames (other than Resp/Id frames) that have been received by this Authenticator.
Rx EAP LenError	The number of EAPOL frames that have been received by this Authenticator in which the Packet Body Length field is invalid.
Rx Last EAPOLVer	The protocol version number carried in the most recently received EAPOL frame.
Rx Last EAPOLSrc	The source MAC address carried in the most recently received EAPOL frame.
Tx EAPOL Total	The number of EAPOL frames of any type that have been transmitted by this Authenticator.
Tx EAP Req/Id	The number of EAP Req/Id frames that have been transmitted by this Authenticator.
Tx EAP Req/Oth	The number of EAP Request frames (other than Rq/Id frames) that have been transmitted by this Authenticator.

Web – Select Security, 802.1X, Statistics. Select the required port and then click Query. Click Refresh to update the statistics.

802.1X Statistics

Port

Rx EXPOL Start	0	Rx EAP LenError	0
Rx EAPOL Logoff	0	Rx Last EAPOLVer	0
Rx EAPOL Invalid	0	Rx Last EAPOLSrc	00-00-00-00-00-00
Rx EAPOL Total	0	Tx EAPOL Total	1
Rx EAP Resp/Id	0	Tx EAP Req/Id	0
Rx EAP Resp/Oth	0	Tx EAP Req/Oth	0

Figure 3-38 802.1X Statistics

3 Configuring the Switch

CLI – This example displays the dot1x statistics for port 4.

```
Console#show dot1x statistics interface ethernet 1/4 4-85

Eth 1/4
Rx: EXPOL      EAPOL      EAPOL      EAPOL      EAP      EAP      EAP
   Start      Logoff      Invalid      Total      Resp/Id  Resp/Oth LenError
       2         0         0         1007       672      0         0

   Last      Last
EAPOLVer    EAPOLSrc
   1         00-00-E8-98-73-21

Tx: EAPOL      EAP      EAP
   Total      Req/Id   Req/Oth
   2017       1005    0
Console#
```

Filtering IP Addresses for Management Access

You can create a list of up to 16 IP addresses or IP address groups that are allowed management access to the switch through the web interface, SNMP, or Telnet.

Command Usage

- The management interfaces are open to all IP addresses by default. Once you add an entry to a filter list, access to that interface is restricted to the specified addresses.
- If anyone tries to access a management interface on the switch from an invalid address, the switch will reject the connection, enter an event message in the system log, and send a trap message to the trap manager.
- IP address can be configured for SNMP, web and Telnet access respectively. Each of these groups can include up to five different sets of addresses, either individual addresses or address ranges.
- When entering addresses for the same group (i.e., SNMP, web or Telnet), the switch will not accept overlapping address ranges. When entering addresses for different groups, the switch will accept overlapping address ranges.
- You cannot delete an individual address from a specified range. You must delete the entire range, and reenter the addresses.
- You can delete an address range just by specifying the start address, or by specifying both the start address and end address.

Command Attributes

- **Web IP Filter** – Configures IP address(es) for the web group.
- **SNMP IP Filter** – Configures IP address(es) for the SNMP group.
- **Telnet IP Filter** – Configures IP address(es) for the Telnet group.
- **IP Filter List** – IP address which are allowed management access to this interface.
- **Start IP Address** – A single IP address, or the starting address of a range.
- **End IP Address** – The end address of a range.

Web – Click Security, IP Filter. Enter the IP addresses or range of addresses that are allowed management access to an interface, and click Add IP Filtering Entry.

Telnet IP Filter List	IP Addresses
	192.168.1.19 192.168.1.19
	192.168.1.25 192.168.1.30

Start IP Address:

End IP Address:

Add Telnet IP Filtering Entry Remove Telnet IP Filtering Entry

Figure 3-39 IP Filter

CLI – This example restricts management access for Telnet clients.

```

Console(config)#management telnet-client 192.168.1.19      4-29
Console(config)#management telnet-client 192.168.1.25 192.168.1.30
Console(config)#exit
Console#show management all-client                          4-30
Management IP Filter
  HTTP-Client:
    Start IP address      End IP address
-----
  SNMP-Client:
    Start IP address      End IP address
-----
  TELNET-Client:
    Start IP address      End IP address
-----
1. 192.168.1.19          192.168.1.19
2. 192.168.1.25          192.168.1.30
Console#

```

Access Control Lists

Access Control Lists (ACL) provide packet filtering for IP frames (based on address, protocol, Layer 4 protocol port number or TCP control code) or any frames (based on MAC address or Ethernet type). To filter incoming packets, first create an access list, add the required rules, specify a mask to modify the precedence in which the rules are checked, and then bind the list to a specific port.

Configuring Access Control Lists

An ACL is a sequential list of permit or deny conditions that apply to IP addresses, MAC addresses, or other more specific criteria. This switch tests ingress or egress packets against the conditions in an ACL one by one. A packet will be accepted as soon as it matches a permit rule, or dropped as soon as it matches a deny rule. If no rules match for a list of all permit rules, the packet is dropped; and if no rules match for a list of all deny rules, the packet is accepted.

You must configure a mask for an ACL rule before you can bind it to a port or set the queue or frame priorities associated with the rule. This is done by specifying masks that control the order in which ACL rules are checked. The switch includes two system default masks that pass/filter packets matching the permit/deny rules specified in an ingress ACL. You can also configure up to seven user-defined masks for an ingress or egress ACL.

Command Usage

The following restrictions apply to ACLs:

- Each ACL can have up to 32 rules.
- The maximum number of ACLs is also 32.
- However, due to resource restrictions, the average number of rules bound to the ports should not exceed 20.
- You must configure a mask for an ACL rule before you can bind it to a port or set the queue or frame priorities associated with the rule.
- When an ACL is bound to an interface as an egress filter, all entries in the ACL must be deny rules. Otherwise, the bind operation will fail.
- The switch does not support the explicit “deny any any” rule for the egress IP ACL or the egress MAC ACLs. If these rules are included in an ACL, and you attempt to bind the ACL to an interface for egress checking, the bind operation will fail.

The order in which active ACLs are checked is as follows:

1. User-defined rules in the Egress MAC ACL for egress ports.
2. User-defined rules in the Egress IP ACL for egress ports.
3. User-defined rules in the Ingress MAC ACL for ingress ports.
4. User-defined rules in the Ingress IP ACL for ingress ports.
5. Explicit default rule (permit any any) in the ingress IP ACL for ingress ports.
6. Explicit default rule (permit any any) in the ingress MAC ACL for ingress ports.
7. If no explicit rule is matched, the implicit default is permit all.

Setting the ACL Name and Type

Use the ACL Configuration page to designate the name and type of an ACL.

Command Attributes

- **Name** – Name of the ACL. (Maximum length: 16 characters)
- **Type** – There are three filtering modes:
 - Standard: IP ACL mode that filters packets based on the source IP address.
 - Extended: IP ACL mode that filters packets based on source or destination IP address, as well as protocol type and protocol port number. If the “TCP” protocol is specified, then you can also filter packets based on the TCP control code.
 - MAC: MAC ACL mode that filters packets based on the source or destination MAC address and the Ethernet frame type (RFC 1060).

Web – Click Security, ACL, Configuration. Enter an ACL name in the Name field, select the list type (IP Standard, IP Extended, or MAC), and click Add to open the configuration page for the new list.

Figure 3-40 Selecting ACL Type

CLI – This example creates a standard IP ACL named bill.

```
Console(config)#access-list ip standard bill
Console(config-std-acl)#
```

4-89

Configuring a Standard IP ACL

Command Attributes

- **Action** – An ACL can contain any combination of permit or deny rules.
- **Address Type** – Specifies the source IP address. Use “Any” to include all possible addresses, “Host” to specify a specific host address in the Address field, or “IP” to specify a range of addresses with the Address and SubMask fields. (Options: Any, Host, IP; Default: Any)
- **IP Address** – Source IP address.
- **Subnet Mask** – A subnet mask containing four integers from 0 to 255, each separated by a period. The mask uses 1 bits to indicate “match” and 0 bits to indicate “ignore.” The mask is bitwise ANDed with the specified source IP address,

3 Configuring the Switch

and compared with the address for each IP packet entering the port(s) to which this ACL has been assigned.

Web – Specify the action (i.e., Permit or Deny). Select the address type (Any, Host, or IP). If you select “Host,” enter a specific address. If you select “IP,” enter a subnet address and the mask for an address range. Then click Add.

Standard ACL

Name: david

Action	IP Address	Subnet Mask	Remove
Permit	10.1.1.21	255.255.255.255	<input type="button" value="Remove"/>

Action	<input type="text" value="Permit"/>
Address Type	<input type="text" value="IP"/>
IP Address	<input type="text" value="168.92.16.0"/>
Subnet Mask	<input type="text" value="255.255.240.0"/>

Figure 3-41 ACL Configuration - Standard IP

CLI – This example configures one permit rule for the specific address 10.1.1.21 and another rule for the address range 168.92.16.x – 168.92.31.x using a bitmask.

```
Console(config-std-acl)#permit host 10.1.1.21 4-90
Console(config-std-acl)#permit 168.92.16.0 255.255.240.0
Console(config-std-acl)#
```

Configuring an Extended IP ACL

Command Attributes

- **Action** – An ACL can contain any combination of permit or deny rules.
- **Source/Destination Address Type** – Specifies the source or destination IP address. Use “Any” to include all possible addresses, “Host” to specify a specific host address in the Address field, or “IP” to specify a range of addresses with the Address and SubMask fields. (Options: Any, Host, IP; Default: Any)
- **Source/Destination IP Address** – Source or destination IP address.
- **Source/Destination Subnet Mask** – Subnet mask for source or destination address. (See the description for SubMask on page 3-67.)
- **Service Type** – Packet priority settings based on the following criteria:
 - **Precedence** – IP precedence level. (Range: 0-7)
 - **TOS** – Type of Service level. (Range: 0-15)
 - **DSCP** – DSCP priority level. (Range: 0-63)
- **Protocol** – Specifies the protocol type to match as TCP, UDP or Others, where others indicates a specific protocol number (0-255). (Options: TCP, UDP, Others; Default: TCP)
- **Source/Destination Port** – Source/destination port number for the specified protocol type. (Range: 0-65535)
- **Source/Destination Port Bitmask** – Decimal number representing the port bits to match. (Range: 0-65535)
- **Control Code** – Decimal number (representing a bit string) that specifies flag bits in byte 14 of the TCP header. (Range: 0-63)
- **Control Code Bitmask** – Decimal number representing the code bits to match. The control bitmask is a decimal number (for an equivalent binary bit mask) that is applied to the control code. Enter a decimal number, where the equivalent binary bit “1” means to match a bit and “0” means to ignore a bit. The following bits may be specified:
 - 1 (fin) – Finish
 - 2 (syn) – Synchronize
 - 4 (rst) – Reset
 - 8 (psh) – Push
 - 16 (ack) – Acknowledgement
 - 32 (urg) – Urgent pointer

For example, use the code value and mask below to catch packets with the following flags set:

- SYN flag valid, use control-code 2, control bitmask 2
- Both SYN and ACK valid, use control-code 18, control bitmask 18
- SYN valid and ACK invalid, use control-code 2, control bitmask 18

3 Configuring the Switch

Web – Specify the action (i.e., Permit or Deny). Specify the source and/or destination addresses. Select the address type (Any, Host, or IP). If you select “Host,” enter a specific address. If you select “IP,” enter a subnet address and the mask for an address range. Set any other required criteria, such as service type, protocol type, or TCP control code. Then click Add.

Extended ACL

Name: mike

Action	Source IP Address	Source Subnet Mask	Destination IP Address	Destination Subnet Mask	TOS	Precedence	DSCP	Protocol	Source Port	Source Port Bitmask	Destination Port	Destination Port Bitmask	Control Code	Control Code Bitmask	Remove
Permit	10.7.1.0	255.255.255.255	Any	Any	Any	Any	Any	6	Any	Any	Any	Any	Any	Any	Remove
Permit	192.168.1.0	255.255.255.255	Any	Any	Any	Any	Any	6	Any	Any	80	65535	Any	Any	Remove

Action	Permit
Source Address Type	Any
Source IP Address	0.0.0.0
Source Subnet Mask	0.0.0.0
Destination Address Type	Any
Destination IP Address	0.0.0.0
Destination Subnet Mask	0.0.0.0
Service Type	<input checked="" type="radio"/> TOS (0-16) <input type="checkbox"/> Precedence (0-8) <input type="checkbox"/> DSCP (0-64)
Protocol	<input checked="" type="radio"/> TCP (6) <input type="checkbox"/> UDP (17) <input type="checkbox"/> Others
Source Port (0-65535)	
Source Port Bitmask (0-65535)	
Destination Port (0-65535)	
Destination Port Bitmask (0-65535)	
Control Code (0-63)	
Control Code Bitmask (0-63)	

Figure 3-42 ACL Configuration - Extended IP

CLI – This example adds three rules:

1. Accept any incoming packets if the source address is in subnet 10.7.1.x. For example, if the rule is matched; i.e., the rule (10.7.1.0 & 255.255.255.0) equals the masked address (10.7.1.2 & 255.255.255.0), the packet passes through.
2. Allow TCP packets from class C addresses 192.168.1.0 to any destination address when set for destination TCP port 80 (i.e., HTTP).
3. Permit all TCP packets from class C addresses 192.168.1.0 with the TCP control code set to “SYN.”

```

Console(config-ext-acl)#permit 10.7.1.1 255.255.255.0 any 4-91
Console(config-ext-acl)#permit 192.168.1.0 255.255.255.0 any
destination-port 80
Console(config-ext-acl)#permit tcp 192.168.1.0 255.255.255.0 any
control-flag 2 2
Console(config-std-acl)#
    
```

Configuring a MAC ACL

Command Attributes

- **Action** – An ACL can contain any combination of permit or deny rules.
- **Source/Destination Address Type** – Use “Any” to include all possible addresses, “Host” to indicate a specific MAC address, or “MAC” to specify an address range with the Address and Bitmask fields. (Options: Any, Host, MAC; Default: Any)
- **Source/Destination MAC Address** – Source or destination MAC address.
- **Source/Destination MAC Bitmask** – Hexidecimal mask for source or destination MAC address.
- **VID** – VLAN ID. (Range: 1-4094)
- **VID Bitmask** – VLAN bitmask. (Range: 1-4095)
- **Ethernet Type** – This option can only be used to filter Ethernet II formatted packets. (Range: 600-fff hex.)
A detailed listing of Ethernet protocol types can be found in RFC 1060. A few of the more common types include 0800 (IP), 0806 (ARP), 8137 (IPX).
- **Ethernet Type Bitmask** – Protocol bitmask. (Range: 600-fff hex.)
- **Packet Format** – This attribute includes the following packet types:
 - **Any** – Any Ethernet packet type.
 - **Untagged-eth2** – Untagged Ethernet II packets.
 - **Untagged-802.3** – Untagged Ethernet 802.3 packets.
 - **Tagged-eth2** – Tagged Ethernet II packets.
 - **Tagged-802.3** – Tagged Ethernet 802.3 packets.

Command Usage

Egress MAC ACLs only work for destination-mac-known packets, not for multicast, broadcast, or destination-mac-unknown packets.

3 Configuring the Switch

Web – Specify the action (i.e., Permit or Deny). Specify the source and/or destination addresses. Select the address type (Any, Host, or MAC). If you select "Host," enter a specific address (e.g., 11-22-33-44-55-66). If you select "MAC," enter a base address and a hexadecimal bitmask for an address range. Set any other required criteria, such as VID, Ethernet type, or packet format. Then click Add.

MAC ACL

Name: bob

Action	Source MAC Address	Source Bitmask	Destination MAC Address	Destination Bitmask	VID	VID Bitmask	Ethernet Type	Ethernet Type Bitmask	Packet Format	Remove
Permit	Any	Any	00-e0-29-94-34-de	ff.ff.ff.ff	Any	Any	2048	85535	Any	Remove

Action	Permit
Source Address Type	Any
Source MAC Address	00-00-00-00-00-00
Source Bitmask	00-00-00-00-00-00
Destination Address Type	Any
Destination MAC Address	00-00-00-00-00-00
Destination Bitmask	00-00-00-00-00-00
VID	
VID Bitmask	
Ethernet Type	
Ethernet Type Bitmask	
Packet Format	Any

Add

Figure 3-43 ACL Configuration - MAC

CLI – This rule permits packets from any source MAC address to the destination address 00-e0-29-94-34-de where the Ethernet type is 0800.

```
Console(config-mac-acl)#permit any host 00-e0-29-94-34-de  
ethertype 0800  
Console(config-mac-acl)#
```

4-103

Configuring ACL Masks

You must specify masks that control the order in which ACL rules are checked. The switch includes two system default masks that pass/filter packets matching the permit/deny rules specified in an ingress ACL. You can also configure up to seven user-defined masks for an ingress or egress ACL. A mask must be bound exclusively to one of the basic ACL types (i.e., Ingress IP ACL, Egress IP ACL, Ingress MAC ACL or Egress MAC ACL), but a mask can be bound to up to four ACLs of the same type.

Command Usage

- Up to seven entries can be assigned to an ACL mask.
- Packets crossing a port are checked against all the rules in the ACL until a match is found. The order in which these packets are checked is determined by the mask, and not the order in which the ACL rules are entered.
- First create the required ACLs and the ingress or egress masks before mapping an ACL to an interface.
- You must configure a mask for an ACL rule before you can bind it to a port or set the queue or frame priorities associated with the rule.

Specifying the Mask Type

Use the ACL Mask Configuration page to edit the mask for the Ingress IP ACL, Egress IP ACL, Ingress MAC ACL or Egress MAC ACL.

Web – Click Security, ACL, Mask Configuration. Click Edit for one of the basic mask types to open the configuration page.

ACL Mask Configuration		
Mask Type	Mask Action	Edit
IP	Ingress	Edit
IP	Egress	Edit
MAC	Ingress	Edit
MAC	Egress	Edit

Figure 3-44 Selecting ACL Mask Types

CLI – This example creates an IP ingress mask, and then adds two rules. Each rule is checked in order of precedence to look for a match in the ACL entries. The first entry matching a mask is applied to the inbound packet.

```

Console(config)#access-list ip mask-precedence in 4-93
Console(config-ip-mask-acl)#mask host any 4-94
Console(config-ip-mask-acl)#mask 255.255.255.0 any
Console(config-ip-mask-acl)#

```

Configuring an IP ACL Mask

This mask defines the fields to check in the IP header.

Command Usage

- Masks that include an entry for a Layer 4 protocol source port or destination port can only be applied to packets with a header length of exactly five bytes.

Command Attributes

- **Source/Destination Address Type** – Specifies the source or destination IP address. Use “Any” to match any address, “Host” to specify a host address (not a subnet), or “IP” to specify a range of addresses. (Options: Any, Host, IP; Default: Any)
- **Source/Destination Subnet Mask** – Source or destination address of rule must match this bitmask. (See the description for SubMask on page 3-67.)
- **Protocol Bitmask** – Check the protocol field.
- **Service Type Mask** – Check the rule for the specified priority type. (Options: Precedence, TOS, DSCP; Default: TOS)
- **Source/Destination Port Bitmask** – Protocol port of rule must match this bitmask. (Range: 0-65535)
- **Control Code Bitmask** – Control flags of rule must match this bitmask. (Range: 0-63)

Web – Configure the mask to match the required rules in the IP ingress or egress ACLs. Set the mask to check for any source or destination address, a specific host address, or an address range. Include other criteria to search for in the rules, such as a protocol type or one of the service types. Or use a bitmask to search for specific protocol port(s) or TCP control code(s). Then click Add.

ACL Mask IP Configuration

Mask IP Ingress Table

Source Subnet Mask	Destination Subnet Mask	Protocol Mask	TOS Mask	Precedence Mask	DSCP Mask	Source Port Bitmask	Destination Port Bitmask	Control Code Bitmask	Remove
255.255.255.255	192.168.1.0	Disabled	Disabled	Disabled	Disabled	Any	80	Any	Remove

Source Address Type	<input type="text" value="Any"/>
Source Subnet Mask	<input type="text" value="0.0.0.0"/>
Destination Address Type	<input type="text" value="Any"/>
Destination Subnet Mask	<input type="text" value="0.0.0.0"/>
Protocol Mask	<input type="checkbox"/> Enabled
Service Type Mask	<input checked="" type="radio"/> <input type="checkbox"/> TOS Enabled <input type="checkbox"/> Precedence Enabled <input type="radio"/> DSCP Enabled
Source Port Bitmask (0-65535)	<input type="text"/>
Destination Port Bitmask (0-65535)	<input type="text"/>
Control Code Bitmask (0-63)	<input type="text"/>

Figure 3-45 ACL Mask Configuration - IP

CLI – This shows that the entries in the mask override the precedence in which the rules are entered into the ACL. In the following example, packets with the source address 10.1.1.1 are dropped because the “deny 10.1.1.1 255.255.255.255” rule has the higher precedence according to the “mask host any” entry.

```

Console(config)#access-list ip standard A2                                4-89
Console(config-std-acl)#permit 10.1.1.0 255.255.255.0                 4-90
Console(config-std-acl)#deny 10.1.1.1 255.255.255.255
Console(config-std-acl)#exit
Console(config)#access-list ip mask-precedence in                       4-93
Console(config-ip-mask-acl)#mask host any                              4-94
Console(config-ip-mask-acl)#mask 255.255.255.0 any
Console(config-ip-mask-acl)#

```

3 Configuring the Switch

Configuring a MAC ACL Mask

This mask defines the fields to check in the packet header.

Command Usage

You must configure a mask for an ACL rule before you can bind it to a port.

Command Attributes

- **Source/Destination Address Type** – Use “Any” to match any address, “Host” to specify the host address for a single node, or “MAC” to specify a range of addresses. (Options: Any, Host, MAC; Default: Any)
- **Source/Destination Bitmask** – Address of rule must match this bitmask.
- **VID Bitmask** – VLAN ID of rule must match this bitmask.
- **Ethernet Type Bitmask** – Ethernet type of rule must match this bitmask.
- **Packet Format Mask** – A packet format must be specified in the rule.

Web – Configure the mask to match the required rules in the MAC ingress or egress ACLs. Set the mask to check for any source or destination address, a host address, or an address range. Use a bitmask to search for specific VLAN ID(s) or Ethernet type(s). Or check for rules where a packet format was specified. Then click Add.

ACL Mask MAC Configuration

Mask MAC Ingress Table

Source Bitmask	Destination Bitmask	VID Bitmask	Ethernet Type Bitmask	Packet Format Mask	Remove
00-11-11-11-11-11	Any	3	800	Enabled	<input type="button" value="Remove"/>

Source Address Type	<input type="text" value="Any"/>
Source Bitmask	<input type="text" value="00-00-00-00-00-00"/>
Destination Address Type	<input type="text" value="Any"/>
Destination Bitmask	<input type="text" value="00-00-00-00-00-00"/>
VID Bitmask	<input type="text"/>
Ethernet Type Bitmask	<input type="text"/>
Packet Format Mask	<input type="checkbox"/> Enabled

Figure 3-46 ACL Mask Configuration - MAC

CLI – This example shows how to create an Ingress MAC ACL and bind it to a port. You can then see that the order of the rules have been changed by the mask.

```

Console(config)#access-list mac M4 4-102
Console(config-mac-acl)#permit any any 4-103
Console(config-mac-acl)#deny tagged-eth2 00-11-11-11-11-11
ff-ff-ff-ff-ff-ff any vid 3 4-103
Console(config-mac-acl)#end
Console#show access-list 4-112
MAC access-list M4:
  permit any any
  deny tagged-eth2 host 00-11-11-11-11-11 any vid 3
Console(config)#access-list mac mask-precedence in 4-105
Console(config-mac-mask-acl)#mask pktformat ff-ff-ff-ff-ff-ff any vid4-106
Console(config-mac-mask-acl)#exit
Console(config)#interface ethernet 1/12 4-149
Console(config-if)#mac access-group M4 in 4-108
Console(config-if)#end
Console#show access-list
MAC access-list M4:
  deny tagged-eth2 host 00-11-11-11-11-11 any vid 3
  permit any any
MAC ingress mask ACL:
  mask pktformat host any vid
Console#

```

Binding a Port to an Access Control List

After configuring the Access Control Lists (ACL), you should bind them to the ports that need to filter traffic. You can only bind a port to one ACL for each basic type – IP ingress, IP egress, MAC ingress and MAC egress.

Command Usage

- You must configure a mask for an ACL rule before you can bind it to a port.
- This switch supports ACLs for both ingress and egress filtering. However, you can only bind one IP ACL and one MAC ACL to any port for ingress filtering, and one IP ACL and one MAC ACL to any port for egress filtering. In other words, only four ACLs can be bound to an interface – Ingress IP ACL, Egress IP ACL, Ingress MAC ACL and Egress MAC ACL.
- When an ACL is bound to an interface as an egress filter, all entries in the ACL must be deny rules. Otherwise, the bind operation will fail.
- The switch does not support the explicit “deny any any” rule for the egress IP ACL or the egress MAC ACLs. If these rules are included in an ACL, and you attempt to bind the ACL to an interface for egress checking, the bind operation will fail.

Command Attributes

- **Port** – Fixed port or SFP module. (Range: 1-12)
- **IP** – Specifies the IP ACL to bind to a port.
- **MAC** – Specifies the MAC ACL to bind to a port.
- **IN** – ACL for ingress packets.
- **OUT** – ACL for egress packets.
- **ACL Name** – Name of the ACL.

3 Configuring the Switch

Web – Click Security, ACL, Port Binding. Mark the Enable field for the port you want to bind to an ACL for ingress or egress traffic, select the required ACL from the drop-down list, then click Apply.

Port	IP		MAC	
	IN	OUT	IN	OUT
1	<input checked="" type="checkbox"/> Enable david	<input type="checkbox"/> Enable david	<input checked="" type="checkbox"/> Enable jerry	<input type="checkbox"/> Enable jerry
2	<input checked="" type="checkbox"/> Enable david	<input type="checkbox"/> Enable david	<input type="checkbox"/> Enable jerry	<input type="checkbox"/> Enable jerry
3	<input type="checkbox"/> Enable david	<input type="checkbox"/> Enable david	<input type="checkbox"/> Enable jerry	<input type="checkbox"/> Enable jerry
4	<input type="checkbox"/> Enable david	<input type="checkbox"/> Enable david	<input type="checkbox"/> Enable jerry	<input type="checkbox"/> Enable jerry
5	<input type="checkbox"/> Enable david	<input type="checkbox"/> Enable david	<input type="checkbox"/> Enable jerry	<input type="checkbox"/> Enable jerry
6	<input type="checkbox"/> Enable david	<input type="checkbox"/> Enable david	<input type="checkbox"/> Enable jerry	<input type="checkbox"/> Enable jerry

Figure 3-47 ACL Port Binding

CLI – This examples assigns an IP and MAC ingress ACL to port 1, and an IP ingress ACL to port 2.

```
Console(config)#interface ethernet 1/1 4-149
Console(config-if)#ip access-group david in 4-98
Console(config-if)#mac access-group jerry in 4-108
Console(config-if)#exit
Console(config)#interface ethernet 1/2
Console(config-if)#ip access-group david in
Console(config-if)#
```

Port Configuration

Displaying Connection Status

You can use the Port Information or Trunk Information pages to display the current connection status, including link state, speed/duplex mode, flow control, and auto-negotiation.

Field Attributes (Web)

- **Name** – Interface label.
- **Type** – Indicates the port type. (1000BASE-T or SFP)
- **Admin Status** – Shows if the interface is enabled or disabled.
- **Oper Status** – Indicates if the link is Up or Down.
- **Speed Duplex Status** – Shows the current speed and duplex mode. (Auto, or fixed choice)
- **Flow Control Status** – Indicates the type of flow control currently in use. (IEEE 802.3x, Back-Pressure or None)
- **Autonegotiation** – Shows if auto-negotiation is enabled or disabled.

- **Media Type**⁶ – Shows the forced/preferred port type to use for combination ports 9-12. (Copper-Forced, Copper-Preferred-Auto, SFP-Forced, SFP-Preferred-Auto)
- **Trunk Member**⁶ – Shows if port is a trunk member.
- **Creation**⁷ – Shows if a trunk is manually configured or dynamically set via LACP.

Web – Click Port, Port Information or Trunk Information.

Port Information										
Port Name	Type	Admin Status	Oper Status	Speed	Duplex Status	Flow Control Status	Autonegotiation	Media Type	Trunk Member	
1	1000Base-SFP	Enabled	Down	1000full		None	Enabled	None		
2	1000Base-SFP	Enabled	Down	1000full		None	Enabled	None		
3	1000Base-SFP	Enabled	Down	1000full		None	Enabled	None		
4	1000Base-SFP	Enabled	Down	1000full		None	Enabled	None		
5	1000Base-SFP	Enabled	Down	1000full		None	Enabled	None		
6	1000Base-SFP	Enabled	Down	1000full		None	Enabled	None		
7	1000Base-SFP	Enabled	Down	1000full		None	Enabled	None		
8	1000Base-SFP	Enabled	Down	1000full		None	Enabled	None		
9	1000Base-TX	Enabled	Down	1000full		None	Enabled	SFP-Preferred-Auto		
10	1000Base-TX	Enabled	Down	1000full		None	Enabled	SFP-Preferred-Auto		
11	1000Base-TX	Enabled	Down	1000full		None	Enabled	SFP-Preferred-Auto		
12	1000Base-TX	Enabled	Up	1000full		None	Enabled	SFP-Preferred-Auto		

Figure 3-48 Port - Port Information

Field Attributes (CLI)

Basic information:

- **Port type** – Indicates the port type. (1000BASE-T or SFP)
- **MAC address** – The physical layer address for this port. (To access this item on the web, see “Setting the Switch’s IP Address” on page 3-15.)

Configuration:

- **Name** – Interface label.
- **Port admin** – Shows if the interface is enabled or disabled (i.e., up or down).
- **Speed-duplex** – Shows the current speed and duplex mode. (Auto, or fixed choice)
- **Capabilities** – Specifies the capabilities to be advertised for a port during auto-negotiation. (To access this item on the web, see “Configuring Interface Connections” on page 3-48.) The following capabilities are supported.
 - **10half** - Supports 10 Mbps half-duplex operation
 - **10full** - Supports 10 Mbps full-duplex operation
 - **100half** - Supports 100 Mbps half-duplex operation
 - **100full** - Supports 100 Mbps full-duplex operation
 - **1000full** - Supports 1000 Mbps full-duplex operation
 - **Sym** - Transmits and receives pause frames for flow control
 - **FC** - Supports flow control
- **Broadcast storm** – Shows if broadcast storm control is enabled or disabled.
- **Broadcast storm limit** – Shows the broadcast storm threshold. (500 - 262143 packets per second)

6. Port Information only.

7. Trunk Information only.

3 Configuring the Switch

- **Flow control** – Shows if flow control is enabled or disabled.
- **LACP** – Shows if LACP is enabled or disabled.
- **Port security** – Shows if port security is enabled or disabled.
- **Max MAC count** – Shows the maximum number of MAC address that can be learned by a port. (0 - 1024 addresses)
- **Port security action** – Shows the response to take when a security violation is detected. (shutdown, trap, trap-and-shutdown)
- **Combo forced mode** – Shows the forced/preferred port type to use for combination ports 9-12. (copper forced, copper preferred auto, SFP forced, SFP preferred auto)

Current status:

- **Link status** – Indicates if the link is up or down.
- **Port operation status** – Provides detailed information on port state. (Displayed only when the link is up.).
- **Operation speed-duplex** – Shows the current speed and duplex mode.
- **Flow control type** – Indicates the type of flow control currently in use. (IEEE 802.3x, Back-Pressure or none)

CLI – This example shows the connection status for Port 5.

```
Console#show interfaces status ethernet 1/5 4-156
Information of Eth 1/13
Basic information:
  Port type: 1000T
  Mac address: 00-30-f1-47-58-46
Configuration:
  Name:
  Port admin: Up
  Speed-duplex: Auto
  Capabilities: 10half, 10full, 100half, 100full, 1000full,
  Broadcast storm: Enabled
  Broadcast storm limit: 500 packets/second
  Flow control: Disabled
  LACP: Disabled
  Port security: Disabled
  Max MAC count: 0
  Port security action: None
  Combo forced mode: None
Current status:
  Link status: Down
  Operation speed-duplex: 100full
  Flow control type: None
Console#
```

Configuring Interface Connections

You can use the Port Configuration or Trunk Configuration page to enable/disable an interface, set auto-negotiation and the interface capabilities to advertise, or manually fix the speed, duplex mode, and flow control.

Command Attributes

- **Name** – Allows you to label an interface. (Range: 1-64 characters)
- **Admin** – Allows you to manually disable an interface. You can disable an interface due to abnormal behavior (e.g., excessive collisions), and then reenable it after the problem has been resolved. You may also disable an interface for security reasons.
- **Speed/Duplex** – Allows you to manually set the port speed and duplex mode (i.e., with auto-negotiation disabled).
- **Flow Control** – Allows automatic or manual selection of flow control.
- **Autonegotiation** (Port Capabilities) – Allows auto-negotiation to be enabled/disabled. When auto-negotiation is enabled, you need to specify the capabilities to be advertised. When auto-negotiation is disabled, you can force the settings for speed, mode, and flow control. The following capabilities are supported.
 - **10half** - Supports 10 Mbps half-duplex operation
 - **10full** - Supports 10 Mbps full-duplex operation
 - **100half** - Supports 100 Mbps half-duplex operation
 - **100full** - Supports 100 Mbps full-duplex operation
 - **1000full** - Supports 1000 Mbps full-duplex operation
 - **Sym** (Gigabit only) - Check this item to transmit and receive pause frames, or clear it to auto-negotiate the sender and receiver for asymmetric pause frames. (*The current switch chip only supports symmetric pause frames.*)
 - **FC** - Supports flow control

Flow control can eliminate frame loss by “blocking” traffic from end stations or segments connected directly to the switch when its buffers fill. When enabled, back pressure is used for half-duplex operation and IEEE 802.3x for full-duplex operation. (Avoid using flow control on a port connected to a hub unless it is actually required to solve a problem. Otherwise back pressure jamming signals may degrade overall performance for the segment attached to the hub.)

(Default: Autonegotiation enabled; Advertised capabilities for RJ-45: 1000BASE-T – 10half, 10full, 100half, 100full, 1000full; SFP: 1000BASE-SX/LX/LH – 1000full)
- **Media Type** – Shows the forced/preferred port type to use for the combination ports 9-12.
 - **Copper-Forced** - Always uses the built-in RJ-45 port.
 - **Copper-Preferred-Auto** - Uses the built-in RJ-45 port if both combination types are functioning and the RJ-45 port has a valid link.
 - **SFP-Forced** - Always uses the SFP port (even if module is not installed).
 - **SFP-Preferred-Auto** - Uses SFP port if both combination types are functioning and the SFP port has a valid link.

3 Configuring the Switch

- **Trunk** – Indicates if a port is a member of a trunk. To create trunks and select port members, see “Creating Trunk Groups” on page 3-84.

Note: Auto-negotiation must be disabled before you can configure or force the interface to use the Speed/Duplex Mode or Flow Control options.

Web – Click Port, Port Configuration or Trunk Configuration. Modify the required interface settings, and click Apply.

Port Configuration									
Port	Name	Admin	Speed Duplex	Flow Control	Autonegotiation			Media Type	Trunk
1		<input checked="" type="checkbox"/> Enabled	1000full	<input type="checkbox"/> Enabled	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> 10h <input type="checkbox"/> 100h <input type="checkbox"/> 1000h <input type="checkbox"/> Sym	<input type="checkbox"/> 10f <input type="checkbox"/> 100f <input checked="" type="checkbox"/> 1000f <input type="checkbox"/> FC	None	
2		<input checked="" type="checkbox"/> Enabled	1000full	<input type="checkbox"/> Enabled	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> 10h <input type="checkbox"/> 100h <input type="checkbox"/> 1000h <input type="checkbox"/> Sym	<input type="checkbox"/> 10f <input type="checkbox"/> 100f <input checked="" type="checkbox"/> 1000f <input type="checkbox"/> FC	None	
3		<input checked="" type="checkbox"/> Enabled	1000full	<input type="checkbox"/> Enabled	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> 10h <input type="checkbox"/> 100h <input type="checkbox"/> 1000h <input type="checkbox"/> Sym	<input type="checkbox"/> 10f <input type="checkbox"/> 100f <input checked="" type="checkbox"/> 1000f <input type="checkbox"/> FC	None	
4		<input checked="" type="checkbox"/> Enabled	1000full	<input type="checkbox"/> Enabled	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> 10h <input type="checkbox"/> 100h <input type="checkbox"/> 1000h <input type="checkbox"/> Sym	<input type="checkbox"/> 10f <input type="checkbox"/> 100f <input checked="" type="checkbox"/> 1000f <input type="checkbox"/> FC	None	
5		<input checked="" type="checkbox"/> Enabled	1000full	<input type="checkbox"/> Enabled	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> 10h <input type="checkbox"/> 100h <input type="checkbox"/> 1000h <input type="checkbox"/> Sym	<input type="checkbox"/> 10f <input type="checkbox"/> 100f <input checked="" type="checkbox"/> 1000f <input type="checkbox"/> FC	None	
6		<input checked="" type="checkbox"/> Enabled	1000full	<input type="checkbox"/> Enabled	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> 10h <input type="checkbox"/> 100h <input type="checkbox"/> 1000h <input type="checkbox"/> Sym	<input type="checkbox"/> 10f <input type="checkbox"/> 100f <input checked="" type="checkbox"/> 1000f <input type="checkbox"/> FC	None	
7		<input checked="" type="checkbox"/> Enabled	1000full	<input type="checkbox"/> Enabled	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> 10h <input type="checkbox"/> 100h <input type="checkbox"/> 1000h <input type="checkbox"/> Sym	<input type="checkbox"/> 10f <input type="checkbox"/> 100f <input checked="" type="checkbox"/> 1000f <input type="checkbox"/> FC	None	
8		<input checked="" type="checkbox"/> Enabled	1000full	<input type="checkbox"/> Enabled	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> 10h <input type="checkbox"/> 100h <input type="checkbox"/> 1000h <input type="checkbox"/> Sym	<input type="checkbox"/> 10f <input type="checkbox"/> 100f <input checked="" type="checkbox"/> 1000f <input type="checkbox"/> FC	None	
9		<input checked="" type="checkbox"/> Enabled	100full	<input type="checkbox"/> Enabled	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> 10h <input checked="" type="checkbox"/> 100h <input type="checkbox"/> 1000h <input type="checkbox"/> Sym	<input checked="" type="checkbox"/> 10f <input checked="" type="checkbox"/> 100f <input checked="" type="checkbox"/> 1000f <input type="checkbox"/> FC	SFP-Preferred-Auto	
10		<input checked="" type="checkbox"/> Enabled	100full	<input type="checkbox"/> Enabled	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> 10h <input checked="" type="checkbox"/> 100h <input type="checkbox"/> 1000h <input type="checkbox"/> Sym	<input checked="" type="checkbox"/> 10f <input checked="" type="checkbox"/> 100f <input checked="" type="checkbox"/> 1000f <input type="checkbox"/> FC	SFP-Preferred-Auto	
11		<input checked="" type="checkbox"/> Enabled	100full	<input type="checkbox"/> Enabled	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> 10h <input checked="" type="checkbox"/> 100h <input type="checkbox"/> 1000h <input type="checkbox"/> Sym	<input checked="" type="checkbox"/> 10f <input checked="" type="checkbox"/> 100f <input checked="" type="checkbox"/> 1000f <input type="checkbox"/> FC	SFP-Preferred-Auto	
12		<input checked="" type="checkbox"/> Enabled	100full	<input type="checkbox"/> Enabled	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> 10h <input checked="" type="checkbox"/> 100h <input type="checkbox"/> 1000h <input type="checkbox"/> Sym	<input checked="" type="checkbox"/> 10f <input checked="" type="checkbox"/> 100f <input checked="" type="checkbox"/> 1000f <input type="checkbox"/> FC	SFP-Preferred-Auto	

Figure 3-49 Port - Port Configuration

CLI – Select the interface, and then enter the required settings.

```
Console(config)#interface ethernet 1/13 4-149
Console(config-if)#description RD SW#13 4-150
Console(config-if)#shutdown 4-154
.
Console(config-if)#no shutdown
Console(config-if)#no negotiation 4-151
Console(config-if)#speed-duplex 100half 4-150
Console(config-if)#flowcontrol 4-153
.
Console(config-if)#negotiation
Console(config-if)#capabilities 100half 4-152
Console(config-if)#capabilities 100full
Console(config-if)#capabilities flowcontrol
Console(config-if)#exit
Console(config)#interface ethernet 1/21
Console(config-if)#combo-forced-mode copper-forced 4-154
Console(config-if)#
```

Creating Trunk Groups

You can create multiple links between devices that work as one virtual, aggregate link. A port trunk offers a dramatic increase in bandwidth for network segments where bottlenecks exist, as well as providing a fault-tolerant link between two devices. You can create up to six trunks at a time.

The switch supports both static trunking and dynamic Link Aggregation Control Protocol (LACP). Static trunks have to be manually configured at both ends of the link, and the switches must comply with the Cisco EtherChannel standard. On the other hand, LACP configured ports can automatically negotiate a trunked link with LACP-configured ports on another device. You can configure any number of ports on the switch as LACP, as long as they are not already configured as part of a static trunk. If ports on another device are also configured as LACP, the switch and the other device will negotiate a trunk link between them. If an LACP trunk consists of more than eight ports, all other ports will be placed in a standby mode. Should one link in the trunk fail, one of the standby ports will automatically be activated to replace it.

Command Usage


Besides balancing the load across each port in the trunk, the other ports provide redundancy by taking over the load if a port in the trunk fails. However, before making any physical connections between devices, use the web interface or CLI to specify the trunk on the devices at both ends. When using a port trunk, take note of the following points:

- Finish configuring port trunks before you connect the corresponding network cables between switches to avoid creating a loop.
- You can create up to six trunks on the switch, with up to eight ports per trunk.
- The ports at both ends of a connection must be configured as trunk ports.
- When configuring static trunks on switches of different types, they must be compatible with the Cisco EtherChannel standard.
- The ports at both ends of a trunk must be configured in an identical manner, including communication mode (i.e., speed, duplex mode and flow control), VLAN assignments, and CoS settings.
- Any of the Gigabit ports on the front panel can be trunked together, including ports of different media types.
- All the ports in a trunk have to be treated as a whole when moved from/to, added or deleted from a VLAN.
- STP, VLAN, and IGMP settings can only be made for the entire trunk.

Statically Configuring a Trunk

Command Usage

- When configuring static trunks, you may not be able to link switches of different types, depending on the manufacturer's implementation. However, note that the static trunks on this switch are Cisco EtherChannel compatible.
- To avoid creating a loop in the network, be sure you add a static trunk via the configuration interface before connecting the ports, and also disconnect the ports before removing a static trunk via the configuration interface.



Command Attributes

- **Member List** (Current) – Shows configured trunks (Trunk ID, Unit, Port).
- **New** – Includes entry fields for creating new trunks.
 - **Trunk** – Trunk identifier. (Range: 1-6)
 - **Port** – Port identifier. (Range: 1-12)

Web – Click Port, Trunk Membership. Enter a trunk ID of 1-6 in the Trunk field, select any of the switch ports from the scroll-down port list, and click Add. After you have completed adding ports to the member list, click Apply.

Trunk Membership

Member List:

Current:

Trunk1, Unit1 Port1
 Trunk1, Unit1 Port2

New:

<<Add

Trunk (1-6)

Remove

Port 1 ▼

Figure 3-50 Static Trunk Configuration

3 Configuring the Switch


CLI – This example creates trunk 2 with ports 9 and 10. Just connect these ports to two static trunk ports on another switch to form a trunk.

```
Console(config)#interface port-channel 2          4-149
Console(config-if)#exit
Console(config)#interface ethernet 1/9          4-149
Console(config-if)#channel-group 1             4-164
Console(config-if)#exit
Console(config)#interface ethernet 1/10
Console(config-if)#channel-group 1
Console(config-if)#end
Console#show interfaces status port-channel 1   4-156
Information of Trunk 1
Basic information:
  Port type: 1000T
  Mac address: 00-00-E8-AA-AA-01
Configuration:
  Name:
  Port admin: Up
  Speed-duplex: Auto
  Capabilities: 10half, 10full, 100half, 100full, 1000full,
  Flow control: Disabled
  Port security: Disabled
  Max MAC count: 0
  Port security action: None
  Combo forced mode: None
Current status:
  Created by: User
  Link status: Down
  Operation speed-duplex: 1000full
  Flow control type: None
  Member Ports: Eth1/9, Eth1/10,
Console#
```

Enabling LACP on Selected Ports

Command Usage


- To avoid creating a loop in the network, be sure you enable LACP before connecting the ports, and also disconnect the ports before disabling LACP.
- If the target switch has also enabled LACP on the connected ports, the trunk will be activated automatically.
- A trunk formed with another switch using LACP will automatically be assigned the next available trunk ID.
- If more than eight ports attached to the same target switch have LACP enabled, the additional ports will be placed in standby mode, and will only be enabled if one of the active links fails.
- All ports on both ends of an LACP trunk must be configured for full duplex, either by forced mode or auto-negotiation.
- Trunks dynamically established through LACP will also be shown in the Member List on the Trunk Membership menu (see page 3-85).



Command Attributes

- **Member List** (Current) – Shows configured trunks (Unit, Port).
- **Port** – Port identifier. (Range: 1-12)

Web – Click Port, LACP, Configuration. Select any of the switch ports from the scroll-down port list and click Add. After you have completed adding ports to the member list, click Apply.

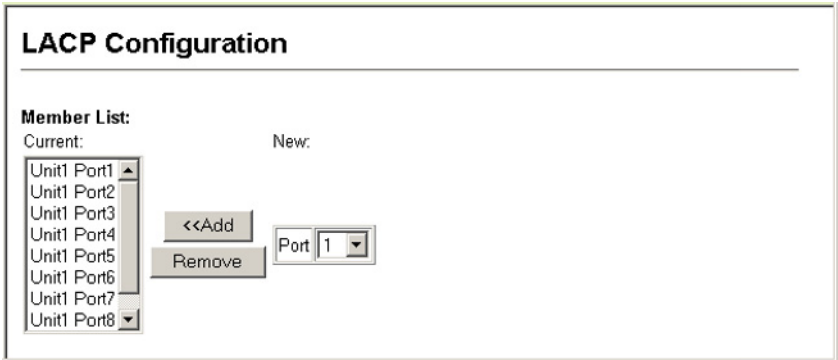

The screenshot displays the "LACP Configuration" window. It features a "Member List" section with a "Current:" label and a scrollable list of ports: Unit1 Port1, Unit1 Port2, Unit1 Port3, Unit1 Port4, Unit1 Port5, Unit1 Port6, Unit1 Port7, and Unit1 Port8. To the right of the list are two buttons: "<<Add" and "Remove". Further right is a "New:" label followed by a dropdown menu currently showing "Port 1".

Figure 3-51 LACP Trunk Configuration

3 Configuring the Switch

CLI – The following example enables LACP for ports 1 to 6. Just connect these ports to LACP-enabled trunk ports on another switch to form a trunk.

```
Console(config)#interface ethernet 1/1 4-149
Console(config-if)#lACP 4-164
Console(config-if)#exit
:
Console(config)#interface ethernet 1/6
Console(config-if)#lACP
Console(config-if)#end
Console#show interfaces status port-channel 1 4-156
Information of Trunk 1
Basic information:
  Port type: 1000T
  Mac address: 22-22-22-22-22-2d
Configuration:
  Name:
  Port admin status: Up
  Speed-duplex: Auto
  Capabilities: 10half, 10full, 100half, 100full, 1000full,
  Flow control status: Disabled
  Port security: Disabled
  Max MAC count: 0
  Port security action: None
  Combo forced mode: None
Current status:
  Created by: LACP
  Link status: Up
  Port operation status: Up
  Operation speed-duplex: 1000full
  Flow control type: None
  Member Ports: Eth1/1, Eth1/2, Eth1/3, Eth1/4, Eth1/5, Eth1/6,
Console#
```

Setting Broadcast Storm Thresholds

Broadcast storms may occur when a device on your network is malfunctioning, or if application programs are not well designed or properly configured. If there is too much broadcast traffic on your network, performance can be severely degraded or everything can come to complete halt.

You can protect your network from broadcast storms by setting a threshold for broadcast traffic for each port. Any broadcast packets exceeding the specified threshold will then be dropped.

Command Usage

Broadcast control does not effect IP multicast traffic.

Command Attributes

- **Port**⁸ – Port number.
- **Trunk**⁹ – Trunk number
- **Type** – Indicates the port type. (1000BASE-T or SFP)

8. Port Broadcast Control

9. Trunk Broadcast Control

- **Protect Status** – Shows whether or not broadcast storm control has been enabled. (Default: Enabled)
- **Threshold** – Threshold as percentage of port bandwidth. (Options: 500-262143 packets per second; Default: 500 packets per second)
- **Trunk⁸** – Shows if port is a trunk member.

Web – Click Port, Broadcast Control. Check the Enabled box for any interface, set the threshold, and click Apply.

Port	Type	Protect Status	Threshold (500-262143)	Trunk
1	1000Base-SFP	<input type="checkbox"/> Enabled	500 (packets/sec)	
2	1000Base-SFP	<input checked="" type="checkbox"/> Enabled	500 (packets/sec)	
3	1000Base-SFP	<input checked="" type="checkbox"/> Enabled	500 (packets/sec)	
4	1000Base-SFP	<input checked="" type="checkbox"/> Enabled	500 (packets/sec)	
5	1000Base-SFP	<input checked="" type="checkbox"/> Enabled	500 (packets/sec)	

Figure 3-52 Port Broadcast Control

CLI – Specify any interface, and then enter the threshold. The following disables broadcast storm control for port 1, and then sets broadcast suppression at 600 packets per second for port 2.


```

Console(config)#interface ethernet 1/1                               4-149
Console(config-if)#no switchport broadcast                          4-155
Console(config-if)#exit
Console(config)#interface ethernet 1/2
Console(config-if)#switchport broadcast packet-rate 600           4-155
Console(config-if)#end
Console#show interfaces switchport ethernet 1/2                   4-158
Information of Eth 1/2
Broadcast threshold: Enabled, 600 packets/second
Lacp status: Disabled
Ingress rate limit: disable,1000M bits per second
Egress rate limit: disable,1000M bits per second
VLAN membership mode: Hybrid
Ingress rule: Disabled
Acceptable frame type: All frames
Native VLAN: 1
Priority for untagged traffic: 0
Gvrp status: Disabled
Allowed Vlan: 1(u),
Forbidden Vlan:
Console#
    
```

3 Configuring the Switch

Configuring Port Mirroring

You can mirror traffic from any source port to a target port for real-time analysis. You can then attach a logic analyzer or RMON probe to the target port and study the traffic crossing the source port in a completely unobtrusive manner.



Command Usage

- Monitor port speed should match or exceed source port speed, otherwise traffic may be dropped from the monitor port.
- All mirror sessions have to share the same destination port.
- When mirroring port traffic, the target port must be included in the same VLAN as the source port.

Command Attributes

- **Mirror Sessions** – Displays a list of current mirror sessions.
- **Source Port** – The port whose traffic will be monitored. (Range: 1-12)
- **Type** – Allows you to select which traffic to mirror to the target port, Rx (receive), Tx (transmit), or Both. (Default: Rx)
- **Target Port** – The port that will “duplicate” or “mirror” the traffic on the source port. (Range: 1-12)

Web – Click Port, Mirror Port Configuration. Specify the source port, the traffic type to be mirrored, and the monitor port, then click Add.

The screenshot shows a web interface titled "Mirror Port Configuration". On the left, there is a table labeled "Mirror Sessions:" with one entry: "Source: 1/10 Both Destination: 1/13". Below the table are buttons for "<<Add" and "Remove". On the right, there is a "New:" form with three dropdown menus: "Source Port" set to 1, "Type" set to Rx, and "Target Port" set to 1.

Figure 3-53 Mirror Port Configuration

CLI – Use the interface command to select the monitor port, then use the port monitor command to specify the source port. Note that default mirroring under the CLI is for both received and transmitted packets.

```
Console(config)#interface ethernet 1/10 4-149
Console(config-if)#port monitor ethernet 1/13 4-160
Console(config-if)#
```


Configuring Rate Limits

This function allows the network manager to control the maximum rate for traffic transmitted or received on an interface. Rate limiting is configured on interfaces at the edge of a network to limit traffic into or out of the switch. Traffic that falls within the rate limit is transmitted, while packets that exceed the acceptable amount of traffic are dropped.

Rate limiting can be applied to individual ports or trunks. When an interface is configured with this feature, the traffic rate will be monitored by the hardware to verify conformity. Non-conforming traffic is dropped, conforming traffic is forwarded without any changes.

Command Attribute

- **Rate Limit** – Sets the output rate limit for an interface.
 Default Status – Disabled
 Default Rate – 1000 Mbps
 Range – 1 - 1000 Mbps

Web - Click Port, Rate Limit, Input/Output Port/Trunk Configuration. Set the Input Rate Limit Status or Output Rate Limit Status, then set the rate limit for the individual interfaces, and click Apply.

Port	Output Rate Limit Status	Output Rate Limit(Mbps)	Trunk
1	Enabled	600	
2	Disabled	1000	
3	Disabled	1000	
4	Disabled	1000	
5	Disabled	1000	
6	Disabled	1000	
7	Disabled	1000	
8	Disabled	1000	
9	Disabled	1000	
10	Disabled	1000	

Figure 3-54 Rate Limit Configuration

CLI - This example sets the rate limit for input and output traffic passing through port 1 to 600 Mbps.

```

Console(config)#interface ethernet 1/1           4-149
Console(config-if)#rate-limit input 600         4-162
Console(config-if)#rate-limit output 600
Console(config-if)#
    
```

Showing Port Statistics

You can display standard statistics on network traffic from the Interfaces Group and Ethernet-like MIBs, as well as a detailed breakdown of traffic based on the RMON MIB. Interfaces and Ethernet-like statistics display errors on the traffic passing through each port. This information can be used to identify potential problems with the switch (such as a faulty port or unusually heavy loading). RMON statistics provide access to a broad range of statistics, including a total count of different frame types and sizes passing through each port. All values displayed have been accumulated since the last system reboot, and are shown as counts per second. Statistics are refreshed every 60 seconds by default.

Note: RMON groups 2, 3 and 9 can only be accessed using SNMP management software such as HP OpenView.

Table 3-7 Port Statistics

Parameter	Description
<i>Interface Statistics</i>	
Received Octets	The total number of octets received on the interface, including framing characters.
Received Unicast Packets	The number of subnetwork-unicast packets delivered to a higher-layer protocol.
Received Multicast Packets	The number of packets, delivered by this sub-layer to a higher (sub-)layer, which were addressed to a multicast address at this sub-layer.
Received Broadcast Packets	The number of packets, delivered by this sub-layer to a higher (sub-)layer, which were addressed to a broadcast address at this sub-layer.
Received Discarded Packets	The number of inbound packets which were chosen to be discarded even though no errors had been detected to prevent their being deliverable to a higher-layer protocol. One possible reason for discarding such a packet could be to free up buffer space.
Received Unknown Packets	The number of packets received via the interface which were discarded because of an unknown or unsupported protocol.
Received Errors	The number of inbound packets that contained errors preventing them from being deliverable to a higher-layer protocol.
Transmit Octets	The total number of octets transmitted out of the interface, including framing characters.
Transmit Unicast Packets	The total number of packets that higher-level protocols requested be transmitted to a subnetwork-unicast address, including those that were discarded or not sent.
Transmit Multicast Packets	The total number of packets that higher-level protocols requested be transmitted, and which were addressed to a multicast address at this sub-layer, including those that were discarded or not sent.
Transmit Broadcast Packets	The total number of packets that higher-level protocols requested be transmitted, and which were addressed to a broadcast address at this sub-layer, including those that were discarded or not sent.

Table 3-7 Port Statistics (Continued)

Parameter	Description
Transmit Discarded Packets	The number of outbound packets which were chosen to be discarded even though no errors had been detected to prevent their being transmitted. One possible reason for discarding such a packet could be to free up buffer space.
Transmit Errors	The number of outbound packets that could not be transmitted because of errors.
<i>Etherlike Statistics</i>	
Alignment Errors	The number of alignment errors (missynchronized data packets).
Late Collisions	The number of times that a collision is detected later than 512 bit-times into the transmission of a packet.
FCS Errors	A count of frames received on a particular interface that are an integral number of octets in length but do not pass the FCS check. This count does not include frames received with frame-too-long or frame-too-short error.
Excessive Collisions	A count of frames for which transmission on a particular interface fails due to excessive collisions. This counter does not increment when the interface is operating in full-duplex mode.
Single Collision Frames	The number of successfully transmitted frames for which transmission is inhibited by exactly one collision.
Internal MAC Transmit Errors	A count of frames for which transmission on a particular interface fails due to an internal MAC sublayer transmit error.
Multiple Collision Frames	A count of successfully transmitted frames for which transmission is inhibited by more than one collision.
Carrier Sense Errors	The number of times that the carrier sense condition was lost or never asserted when attempting to transmit a frame.
SQE Test Errors	A count of times that the SQE TEST ERROR message is generated by the PLS sublayer for a particular interface.
Frames Too Long	A count of frames received on a particular interface that exceed the maximum permitted frame size.
Deferred Transmissions	A count of frames for which the first transmission attempt on a particular interface is delayed because the medium was busy.
Internal MAC Receive Errors	A count of frames for which reception on a particular interface fails due to an internal MAC sublayer receive error.
<i>RMON Statistics</i>	
Drop Events	The total number of events in which packets were dropped due to lack of resources.
Jabbers	The total number of frames received that were longer than 1518 octets (excluding framing bits, but including FCS octets), and had either an FCS or alignment error.
Received Bytes	Total number of bytes of data received on the network. This statistic can be used as a reasonable indication of Ethernet utilization.
Collisions	The best estimate of the total number of collisions on this Ethernet segment.

3 Configuring the Switch

Table 3-7 Port Statistics (Continued)

Parameter	Description
Received Frames	The total number of frames (bad, broadcast and multicast) received.
Broadcast Frames	The total number of good frames received that were directed to the broadcast address. Note that this does not include multicast packets.
Multicast Frames	The total number of good frames received that were directed to this multicast address.
CRC/Alignment Errors	The number of CRC/alignment errors (FCS or alignment errors).
Undersize Frames	The total number of frames received that were less than 64 octets long (excluding framing bits, but including FCS octets) and were otherwise well formed.
Oversize Frames	The total number of frames received that were longer than 1518 octets (excluding framing bits, but including FCS octets) and were otherwise well formed.
Fragments	The total number of frames received that were less than 64 octets in length (excluding framing bits, but including FCS octets) and had either an FCS or alignment error.
64 Bytes Frames	The total number of frames (including bad packets) received and transmitted that were 64 octets in length (excluding framing bits but including FCS octets).
65-127 Byte Frames 128-255 Byte Frames 256-511 Byte Frames 512-1023 Byte Frames 1024-1518 Byte Frames 1519-1536 Byte Frames	The total number of frames (including bad packets) received and transmitted where the number of octets fall within the specified range (excluding framing bits but including FCS octets).

Web – Click Port, Port Statistics. Select the required interface, and click Query. You can also use the Refresh button at the bottom of the page to update the screen.

Port Statistics

Interface Port 1 Trunk

Interface Statistics:

Received Octets	15020	Received Unicast Packets	0
Received Multicast Packets	177	Received Broadcast Packets	0
Received Discarded Packets	0	Received Unknown Packets	0
Received Errors	0	Transmit Octets	168087
Transmit Unicast Packets	0	Transmit Multicast Packets	2420
Transmit Broadcast Packets	47	Transmit Discarded Packets	0
Transmit Errors	0		

Etherlike Statistics:

Alignment Errors	0	Late Collisions	0
FCS Errors	0	Excessive Collisions	0
Single Collision Frames	0	Internal MAC Transmit Errors	0
Multiple Collision Frames	0	Carrier Sense Errors	0
SQE Test Errors	0	Frames Too Long	0
Deferred Transmissions	0	Internal MAC Receive Errors	0

RMON Statistics:

Drop Events	0	Jabbers	0
Received Bytes	188155	Collisions	0
Received Frames	0	64 Bytes Frames	2249
Broadcast Frames	47	65-127 Bytes Frames	459
Multicast Frames	2672	128-255 Bytes Frames	11
CRC/Alignment Errors	0	256-511 Bytes Frames	0
Undersize Frames	0	512-1023 Bytes Frames	0
Oversize Frames	0	1024-1518 Bytes Frames	0
Fragments	0		

Figure 3-55 Port Statistics

3 Configuring the Switch

CLI – This example shows statistics for port 12.

```
Console#show interfaces counters ethernet 1/12 4-157
Ethernet 1/12
Iftable stats:
  Octets input: 868453, Octets output: 3492122
  Unicast input: 7315, Unicast output: 6658
  Discard input: 0, Discard output: 0
  Error input: 0, Error output: 0
  Unknown protos input: 0, QLen output: 0
Extended iftable stats:
  Multi-cast input: 0, Multi-cast output: 17027
  Broadcast input: 231, Broadcast output: 7
Ether-like stats:
  Alignment errors: 0, FCS errors: 0
  Single Collision frames: 0, Multiple collision frames: 0
  SQE Test errors: 0, Deferred transmissions: 0
  Late collisions: 0, Excessive collisions: 0
  Internal mac transmit errors: 0, Internal mac receive errors: 0
  Frame too longs: 0, Carrier sense errors: 0
  Symbol errors: 0
RMON stats:
  Drop events: 0, Octets: 4422579, Packets: 31552
  Broadcast pkts: 238, Multi-cast pkts: 17033
  Undersize pkts: 0, Oversize pkts: 0
  Fragments: 0, Jabbers: 0
  CRC align errors: 0, Collisions: 0
  Packet size <= 64 octets: 25568, Packet size 65 to 127 octets: 1616
  Packet size 128 to 255 octets: 1249, Packet size 256 to 511 octets: 1449
  Packet size 512 to 1023 octets: 802, Packet size 1024 to 1518 octets: 871
Console#
```

Address Table Settings

Switches store the addresses for all known devices. This information is used to pass traffic directly between the inbound and outbound ports. All the addresses learned by monitoring traffic are stored in the dynamic address table. You can also manually configure static addresses that are bound to a specific port.

Setting Static Addresses

A static address can be assigned to a specific interface on this switch. Static addresses are bound to the assigned interface and will not be moved. When a static address is seen on another interface, the address will be ignored and will not be written to the address table.

Command Attributes

- **Static Address Counts**¹⁰ – The number of manually configured addresses.
- **Current Static Address Table** – Lists all the static addresses.
- **Interface** – Port or trunk associated with the device assigned a static address.
- **MAC Address** – Physical address of a device mapped to this interface.
- **VLAN** – ID of configured VLAN (1-4094).

10. Web Only.

Web – Click Address Table, Static Addresses. Specify the interface, the MAC address and VLAN, then click Add Static Address.

Static Addresses

Static Address Counts	<input type="text" value="1"/>	
Current Static Address Table	00-E0-29-94-34-DE, VLAN 1, Unit 1, Port 1, Permanent	
Interface	<input checked="" type="radio"/> Port <input type="text" value="1"/>	<input type="radio"/> Trunk <input type="text"/>
MAC Address (XX:XX:XX:XX:XX:XX)	<input type="text"/>	
VLAN	<input type="text" value="1"/>	

Add Static Address
Remove Static Address

Figure 3-56 Static Addresses

CLI – This example adds an address to the static address table, but sets it to be deleted when the switch is reset.

```

Console(config)#mac-address-table static 00-e0-29-94-34-de interface
 ethernet 1/1 vlan 1 delete-on-reset
Console(config)#
  
```

Displaying the Address Table

The Dynamic Address Table contains the MAC addresses learned by monitoring the source address for traffic entering the switch. When the destination address for inbound traffic is found in the database, the packets intended for that address are forwarded directly to the associated port. Otherwise, the traffic is flooded to all ports.

Command Attributes

- **Interface** – Indicates a port or trunk.
- **MAC Address** – Physical address associated with this interface.
- **VLAN** – ID of configured VLAN (1-4094).
- **Address Table Sort Key** – You can sort the information displayed based on MAC address, VLAN or interface (port or trunk).
- **Dynamic Address Counts** – The number of addresses dynamically learned.
- **Current Dynamic Address Table** – Lists all the dynamic addresses.

3 Configuring the Switch

Web – Click Address Table, Dynamic Addresses. Specify the search type (i.e., mark the Interface, MAC Address, or VLAN checkbox), select the method of sorting the displayed addresses, and then click Query.

Dynamic Addresses

Query by:

<input checked="" type="checkbox"/> Interface	Port 1	Trunk
<input type="checkbox"/> MAC Address		
<input type="checkbox"/> VLAN	1	
Address Table Sort Key	Address	

Query

Dynamic Address Table	
Dynamic Address Counts	1
Current Dynamic Address Table	00-20-9C-23-CD-60, VLAN 2, Unit 1, Port 1, Dynamic

Figure 3-57 Dynamic Addresses

CLI – This example also displays the address table entries for port 1.

```
Console#show mac-address-table interface ethernet 1/1 4-167
Interface Mac Address      Vlan Type
-----
Eth 1/ 1 00-E0-29-94-34-DE  1 Permanent
Eth 1/ 1 00-20-9C-23-CD-60  2 Learned
Console#
```


Changing the Aging Time

You can set the aging time for entries in the dynamic address table.

Command Attributes

- **Aging Status** – Enables/disables the aging function.
- **Aging Time** – The time after which a learned entry is discarded. (Range: 10-1000000 seconds; Default: 300 seconds)

Web – Click Address Table, Address Aging. Specify the new aging time, click Apply.

Address Aging	
Aging Status	<input checked="" type="checkbox"/> Enabled
Aging Time (10-1000000):	<input type="text" value="400"/> seconds

Figure 3-58 Address Aging

CLI – This example sets the aging time to 400 seconds.

```
Console(config)#mac-address-table aging-time 400
Console(config)#
```

4-168

Spanning Tree Algorithm Configuration


The Spanning Tree Algorithm (STA) can be used to detect and disable network loops, and to provide backup links between switches, bridges or routers. This allows the switch to interact with other bridging devices (that is, an STA-compliant switch, bridge or router) in your network to ensure that only one route exists between any two stations on the network, and provide backup links which automatically take over when a primary link goes down.

The spanning tree algorithms supported by this switch include these versions:

- STP – Spanning Tree Protocol (IEEE 802.1D)
- RSTP – Rapid Spanning Tree Protocol (IEEE 802.1w)
- MSTP – Multiple Spanning Tree Protocol (IEEE 802.1s)

STA uses a distributed algorithm to select a bridging device (STA-compliant switch, bridge or router) that serves as the root of the spanning tree network. It selects a root port on each bridging device (except for the root device) which incurs the lowest path cost when forwarding a packet from that device to the root device. Then it selects a designated bridging device from each LAN which incurs the lowest path cost when forwarding a packet from that LAN to the root device. All ports connected to designated bridging devices are assigned as designated ports. After determining the lowest cost spanning tree, it enables all root ports and designated ports, and disables all other ports. Network packets are therefore only forwarded between root ports and designated ports, eliminating any possible network loops.

3 Configuring the Switch

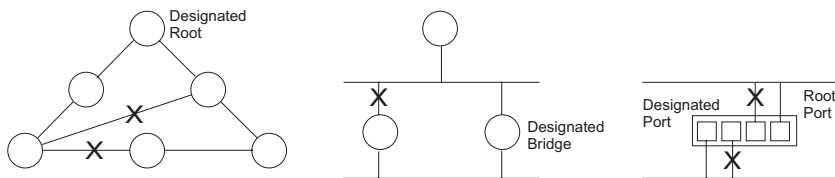

Once a stable network topology has been established, all bridges listen for Hello BPDUs (Bridge Protocol Data Units) transmitted from the Root Bridge. If a bridge does not get a Hello BPDU after a predefined interval (Maximum Age), the bridge assumes that the link to the Root Bridge is down. This bridge will then initiate negotiations with other bridges to reconfigure the network to reestablish a valid network topology.

RSTP is designed as a general replacement for the slower, legacy STP. RSTP is also incorporated into MSTP. RSTP achieves much faster reconfiguration (i.e., around 1 to 3 seconds, compared to 30 seconds or more for STP) by reducing the number of state changes before active ports start learning, predefining an alternate route that can be used when a node or port fails, and retaining the forwarding database for ports insensitive to changes in the tree structure when reconfiguration occurs.

When using STP or RSTP, it may be difficult to maintain a stable path between all VLAN members. Frequent changes in the tree structure can easily isolate some of the group members. MSTP (an extension of RSTP) is designed to support independent spanning trees based on VLAN groups. Once you specify the VLANs to include in a Multiple Spanning Tree Instance (MSTI), the protocol will automatically build an MSTI tree to maintain connectivity among each of the VLANs. MSTP maintains contact with the global network because each instance is treated as an RSTP node in the Common Spanning Tree (CST).

Displaying Global Settings

You can display a summary of the current bridge STA information that applies to the entire switch using the STA Information screen.

Field Attributes

- **Spanning Tree State** – Shows if the switch is enabled to participate in an STA-compliant network.
- **Bridge ID** – A unique identifier for this bridge, consisting of the bridge priority, the MST Instance ID 0 for the Common Spanning Tree when spanning tree mode is set to MSTP (page 3-118), and MAC address (where the address is taken from the switch system).
- **Max Age** – The maximum time (in seconds) a device can wait without receiving a configuration message before attempting to reconfigure. All device ports (except for designated ports) should receive configuration messages at regular intervals. Any port that ages out STA information (provided in the last configuration message) becomes the designated port for the attached LAN. If it is a root port, a

new root port is selected from among the device ports attached to the network. (References to “ports” in this section mean “interfaces,” which includes both ports and trunks.)

- **Hello Time** – Interval (in seconds) at which the root device transmits a configuration message.
- **Forward Delay** – The maximum time (in seconds) the root device will wait before changing states (i.e., discarding to learning to forwarding). This delay is required because every device must receive information about topology changes before it starts to forward frames. In addition, each port needs time to listen for conflicting information that would make it return to a discarding state; otherwise, temporary data loops might result.
- **Designated Root** – The priority and MAC address of the device in the Spanning Tree that this switch has accepted as the root device.
 - **Root Port** – The number of the port on this switch that is closest to the root. This switch communicates with the root device through this port. If there is no root port, then this switch has been accepted as the root device of the Spanning Tree network.
 - **Root Path Cost** – The path cost from the root port on this switch to the root device.
- **Configuration Changes** – The number of times the Spanning Tree has been reconfigured.
- **Last Topology Change** – Time since the Spanning Tree was last reconfigured.

These additional parameters are only displayed for the CLI:

- **Spanning tree mode** – Specifies the type of spanning tree used on this switch:
 - **STP**: Spanning Tree Protocol (IEEE 802.1D)
 - **RSTP**: Rapid Spanning Tree (IEEE 802.1w)
 - **MSTP**: Multiple Spanning Tree (IEEE 802.1s)
- **Instance** – Instance identifier of this spanning tree. (This is always 0 for the CIST.)
- **VLANs configuration** – VLANs assigned to the CIST.
- **Priority** – Bridge priority is used in selecting the root device, root port, and designated port. The device with the highest priority (i.e., lower numeric value) becomes the STA root device. However, if all devices have the same priority, the device with the lowest MAC address will then become the root device.
- **Root Hello Time** – Interval (in seconds) at which this device transmits a configuration message.
- **Root Maximum Age** – The maximum time (in seconds) this device can wait without receiving a configuration message before attempting to reconfigure. All device ports (except for designated ports) should receive configuration messages at regular intervals. If the root port ages out STA information (provided in the last configuration message), a new root port is selected from among the device ports attached to the network. (References to “ports” in this section means “interfaces,” which includes both ports and trunks.)

3 Configuring the Switch

- **Root Forward Delay** – The maximum time (in seconds) this device will wait before changing states (i.e., discarding to learning to forwarding). This delay is required because every device must receive information about topology changes before it starts to forward frames. In addition, each port needs time to listen for conflicting information that would make it return to a discarding state; otherwise, temporary data loops might result.
- **Max hops** – The max number of hop counts for the MST region.
- **Remaining hops** – The remaining number of hop counts for the MST instance.
- **Transmission limit** – The minimum interval between the transmission of consecutive RSTP/MSTP BPDUs.
- **Path Cost Method** – The path cost is used to determine the best path between devices. The path cost method is used to determine the range of values that can be assigned to each interface.

Web – Click Spanning Tree, STA, Information.

STA Information			
Spanning Tree:			
Spanning Tree State	Enabled	Designated Root	32768.0000ABCD0000
Bridge ID	32768.0000ABCD0000	Root Port	0
Max Age	20	Root Path Cost	0
Hello Time	2	Configuration Changes	2
Forward Delay	15	Last Topology Change	0 d 0 h 0 min 35 s

Figure 3-59 STA Information

CLI – This command displays global STA settings, followed by settings for each port.

```

Console#show spanning-tree                               4-186
Spanning-tree information
-----
Spanning tree mode                                     :MSTP
Spanning tree enable/disable                          :enable
Instance                                              :0
Vlans configuration                                  :1-4094
Priority                                              :32768
Bridge Hello Time (sec.)                             :2
Bridge Max Age (sec.)                               :20
Bridge Forward Delay (sec.)                          :15
Root Hello Time (sec.)                               :2
Root Max Age (sec.)                                 :20
Root Forward Delay (sec.)                            :15
Max hops                                             :20
Remaining hops                                       :20
Designated Root                                      :32768.0.0000ABCD0000
Current root port                                    :1
Current root cost                                    :200000
Number of topology changes                           :1
Last topology changes time (sec.):13380
Transmission limit                                   :3
Path Cost Method                                     :long
:

```

Note: The current root port and current root cost display as zero when this device is not connected to the network.

Configuring Global Settings

Global settings apply to the entire switch.

Command Usage

- Spanning Tree Protocol¹¹

Uses RSTP for the internal state machine, but sends only 802.1D BPDUs. This creates one spanning tree instance for the entire network. If multiple VLANs are implemented on a network, the path between specific VLAN members may be inadvertently disabled to prevent network loops, thus isolating group members. When operating multiple VLANs, we recommend selecting the MSTP option.

- Rapid Spanning Tree Protocol¹¹

RSTP supports connections to either STP or RSTP nodes by monitoring the incoming protocol messages and dynamically adjusting the type of protocol messages the RSTP node transmits, as described below:

- STP Mode – If the switch receives an 802.1D BPDU (i.e., STP BPDU) after a port's migration delay timer expires, the switch assumes it is connected to an 802.1D bridge and starts using only 802.1D BPDUs.
- RSTP Mode – If RSTP is using 802.1D BPDUs on a port and receives an RSTP BPDU after the migration delay expires, RSTP restarts the migration delay timer and begins using RSTP BPDUs on that port.

11. STP and RSTP BPDUs are transmitted as untagged frames, and will cross any VLAN boundaries.

3 Configuring the Switch

- Multiple Spanning Tree Protocol
 - To allow multiple spanning trees to operate over the network, you must configure a related set of bridges with the same MSTP configuration, allowing them to participate in a specific set of spanning tree instances.
 - A spanning tree instance can exist only on bridges that have compatible VLAN instance assignments.
 - Be careful when switching between spanning tree modes. Changing modes stops all spanning-tree instances for the previous mode and restarts the system in the new mode, temporarily disrupting user traffic.

Command Attributes

Basic Configuration of Global Settings

- **Spanning Tree State** – Enables/disables STA on this switch. (Default: Enabled)
- **Spanning Tree Type** – Specifies the type of spanning tree used on this switch:
 - **STP**: Spanning Tree Protocol (IEEE 802.1D); i.e., when this option is selected, the switch will use RSTP set to STP forced compatibility mode).
 - **RSTP**: Rapid Spanning Tree (IEEE 802.1w); RSTP is the default.
 - **MSTP**: Multiple Spanning Tree (IEEE 802.1s)
- **Priority** – Bridge priority is used in selecting the root device, root port, and designated port. The device with the highest priority becomes the STA root device. However, if all devices have the same priority, the device with the lowest MAC address will then become the root device. (Note that lower numeric values indicate higher priority.)
 - Default: 32768
 - Range: 0-61440, in steps of 4096
 - Options: 0, 4096, 8192, 12288, 16384, 20480, 24576, 28672, 32768, 36864, 40960, 45056, 49152, 53248, 57344, 61440

Root Device Configuration

- **Hello Time** – Interval (in seconds) at which the root device transmits a configuration message.
 - Default: 2
 - Minimum: 1
 - Maximum: The lower of 10 or $[(\text{Max. Message Age} / 2) - 1]$
- **Maximum Age** – The maximum time (in seconds) a device can wait without receiving a configuration message before attempting to reconfigure. All device ports (except for designated ports) should receive configuration messages at regular intervals. Any port that ages out STA information (provided in the last configuration message) becomes the designated port for the attached LAN. If it is a root port, a new root port is selected from among the device ports attached to the network. (References to “ports” in this section mean “interfaces,” which includes both ports and trunks.)
 - Default: 20
 - Minimum: The higher of 6 or $[2 \times (\text{Hello Time} + 1)]$.
 - Maximum: The lower of 40 or $[2 \times (\text{Forward Delay} - 1)]$

- **Forward Delay** – The maximum time (in seconds) this device will wait before changing states (i.e., discarding to learning to forwarding). This delay is required because every device must receive information about topology changes before it starts to forward frames. In addition, each port needs time to listen for conflicting information that would make it return to a discarding state; otherwise, temporary data loops might result.
 - Default: 15
 - Minimum: The higher of 4 or $[(\text{Max. Message Age} / 2) + 1]$
 - Maximum: 30

Configuration Settings for RSTP

The following attributes apply to both RSTP and MSTP:

- **Path Cost Method** – The path cost is used to determine the best path between devices. The path cost method is used to determine the range of values that can be assigned to each interface.
 - Long: Specifies 32-bit based values that range from 1-200,000,000. (This is the default.)
 - Short: Specifies 16-bit based values that range from 1-65535.
- **Transmission Limit** – The maximum transmission rate for BPDUs is specified by setting the minimum interval between the transmission of consecutive protocol messages. (Range: 1-10; Default: 3)

Configuration Settings for MSTP

- **Max Instance Numbers** – The maximum number of MSTP instances to which this switch can be assigned. (Default: 65)
- **Configuration Digest** – An MD5 signature key that contains the VLAN ID to MST ID mapping table. In other words, this key is a mapping of all VLANs to the CIST.
- **Region Revision**¹² – The revision for this MSTI. (Range: 0-65535; Default: 0)
- **Region Name**¹² – The name for this MSTI. (Maximum length: 32 characters)
- **Maximum Hop Count** – The maximum number of hops allowed in the MST region before a BPDU is discarded. (Range: 1-40; Default: 20)

12. The MST name and revision number are both required to uniquely identify an MST region.

3 Configuring the Switch

Web – Click Spanning Tree, STA, Configuration. Modify the required attributes, and click Apply.

STA Configuration

Switch:

Spanning Tree State	<input checked="" type="checkbox"/> Enabled
Spanning Tree Type	MSTP ▾
Priority (0-61440), in steps of 4096	32768

When the Switch Becomes Root:

Input Format: $2 * (\text{hello time} + 1) \leq \text{max age} \leq 2 * (\text{forward delay} - 1)$

Hello Time (1-10)	2	seconds
Maximum Age (6-40)	20	seconds
Forward Delay (4-30)	15	seconds

RSTP Configuration:

Path Cost Method	Long ▾
Transmission Limit (1-10)	3

MSTP Configuration:

Max Instance Numbers	65
Configuration Digest	0xAC36177F50283CD4B83821D8AB26DE62
Region Revision (0-65535)	0
Region Name	00 00 e8 aa aa 00
Max Hop Count (1-40)	20

Figure 3-60 STA Global Configuration

CLI – This example enables Spanning Tree Protocol, sets the mode to MST, and then configures the STA and MSTP parameters.

```

Console (config)#spanning-tree                               4-170
Console (config)#spanning-tree mode mst                    4-171
Console (config)#spanning-tree priority 40000              4-174
Console (config)#spanning-tree hello-time 5                4-173
Console (config)#spanning-tree max-age 38                  4-173
Console (config)#spanning-tree forward-time 20             4-172
Console (config)#spanning-tree pathcost method long        4-174
Console (config)#spanning-tree transmission-limit 4        4-175
Console (config)#Console (config)#spanning-tree mst-configuration 4-175
Console (config-mstp)#revision 1                           4-178
Console (config-mstp)#name R&D                             4-177
Console (config-mstp)#max-hops 30                          4-179
Console (config-mstp)#

```

Displaying Interface Settings

The STA Port Information and STA Trunk Information pages display the current status of ports and trunks in the Spanning Tree.

Field Attributes



- **Spanning Tree** – Shows if STA has been enabled on this interface.
- **STA Status** – Displays current state of this port within the Spanning Tree:
 - **Discarding** - Port receives STA configuration messages, but does not forward packets.
 - **Learning** - Port has transmitted configuration messages for an interval set by the Forward Delay parameter without receiving contradictory information. Port address table is cleared, and the port begins learning addresses.
 - **Forwarding** - Port forwards packets, and continues learning addresses.

The rules defining port status are:

- A port on a network segment with no other STA compliant bridging device is always forwarding.
- If two ports of a switch are connected to the same segment and there is no other STA device attached to this segment, the port with the smaller ID forwards packets and the other is discarding.
- All ports are discarding when the switch is booted, then some of them change state to learning, and then to forwarding.
- **Forward Transitions** – The number of times this port has transitioned from the Learning state to the Forwarding state.
- **Designated Cost** – The cost for a packet to travel from this port to the root in the current Spanning Tree configuration. The slower the media, the higher the cost.
- **Designated Bridge** – The bridge priority and MAC address of the device through which this port must communicate to reach the root of the Spanning Tree.
- **Designated Port** – The port priority and number of the port on the designated bridging device through which this switch must communicate with the root of the Spanning Tree.

3 Configuring the Switch

- **Oper Link Type** – The operational point-to-point status of the LAN segment attached to this interface. This parameter is determined by manual configuration or by auto-detection, as described for Admin Link Type in STA Port Configuration on page 3-110.
- **Oper Edge Port** – This parameter is initialized to the setting for Admin Edge Port in STA Port Configuration on page 3-110 (i.e., true or false), but will be set to false if a BPDU is received, indicating that another bridge is attached to this port.
- **Port Role** – Roles are assigned according to whether the port is part of the active topology connecting the bridge to the root bridge (i.e., **root port**), connecting a LAN through the bridge to the root bridge (i.e., **designated port**), or is the MSTI regional root (i.e., **master port**); or is an **alternate** or **backup** port that may provide connectivity if other bridges, bridge ports, or LANs fail or are removed. The role is set to disabled (i.e., **disabled** port) if a port has no role within the spanning tree.

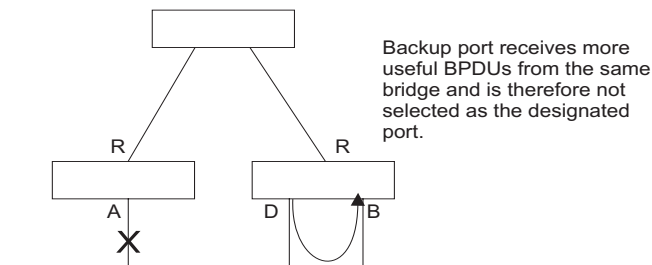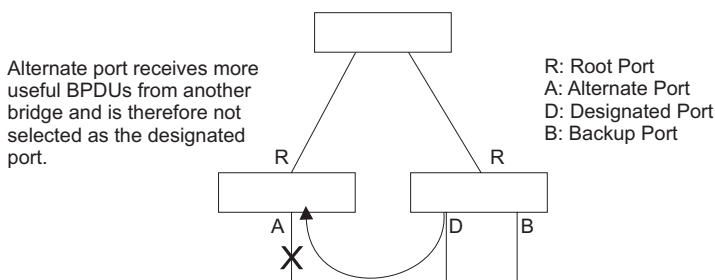

- **Trunk Member** – Indicates if a port is a member of a trunk. (STA Port Information only)

These additional parameters are only displayed for the CLI:

- **Admin status** – Shows if this interface is enabled.
- **External path cost** – The path cost for the IST. This parameter is used by the STA to determine the best path between devices. Therefore, lower values should be assigned to ports attached to faster media, and higher values assigned to ports with slower media. (Path cost takes precedence over port priority.)
- **Internal path cost** – The path cost for the MST. See the preceding item.

- **Priority** – Defines the priority used for this port in the Spanning Tree Algorithm. If the path cost for all ports on a switch is the same, the port with the highest priority (i.e., lowest value) will be configured as an active link in the Spanning Tree. This makes a port with higher priority less likely to be blocked if the Spanning Tree Algorithm is detecting network loops. Where more than one port is assigned the highest priority, the port with the lowest numeric identifier will be enabled.
- **Designated root** – The priority and MAC address of the device in the Spanning Tree that this switch has accepted as the root device.
- **Fast forwarding** – This field provides the same information as Admin Edge port, and is only included for backward compatibility with earlier products.
- **Admin Edge Port** – You can enable this option if an interface is attached to a LAN segment that is at the end of a bridged LAN or to an end node. Since end nodes **cannot** cause forwarding loops, they can pass directly through to the spanning tree forwarding state. Specifying Edge Ports provides quicker convergence for devices such as workstations or servers, retains the current forwarding database to reduce the amount of frame flooding required to rebuild address tables during reconfiguration events, does not cause the spanning tree to reconfigure when the interface changes state, and also overcomes other STA-related timeout problems. However, remember that Edge Port should only be enabled for ports connected to an end-node device.
- **Admin Link Type** – The link type attached to this interface.
 - Point-to-Point – A connection to exactly one other bridge.
 - Shared – A connection to two or more bridges.
 - Auto – The switch automatically determines if the interface is attached to a point-to-point link or to shared media.

Web – Click Spanning Tree, STA, Port Information or STA Trunk Information.

STA Port Information										
Port	Spanning Tree	STA Status	Forward Transitions	Designated Cost	Designated Bridge	Designated Port	Oper Link Type	Oper Edge Port	Port Role	Trunk Member
1	Enabled	Forwarding	7	200000	32768.0.0030F1552000	128.24	Point-to-Point	Disabled	Root	
2	Enabled	Discarding	0	200000	61440.0.0000E9313131	128.2	Point-to-Point	Enabled	Disabled	
3	Enabled	Discarding	0	200000	61440.0.0000E9313131	128.3	Point-to-Point	Enabled	Disabled	
4	Enabled	Discarding	0	200000	61440.0.0000E9313131	128.4	Point-to-Point	Enabled	Disabled	
5	Enabled	Discarding	0	200000	61440.0.0000E9313131	128.5	Point-to-Point	Enabled	Disabled	

Figure 3-61 STA Port Information

3 Configuring the Switch

CLI – This example shows the STA attributes for port 5.

```
Console#show spanning-tree ethernet 1/5                               4-186
Eth 1/ 5 information
-----
Admin status      : enable
Role              : disable
State            : discarding
External path cost : 10000
Internal path cost : 10000
Priority          : 128
Designated cost   : 200000
Designated port   : 128,5
Designated root   : 61440.0.0000E9313131
Designated bridge : 61440.0.0000E9313131
Fast forwarding   : enable
Forward transitions : 0
Admin edge port   : enable
Oper edge port    : enable
Admin Link type   : auto
Oper Link type    : point-to-point
Spanning Tree Status : enable
Console#
```

Configuring Interface Settings

You can configure RSTP and MSTP attributes for specific interfaces, including port priority, path cost, link type, and edge port. You may use a different priority or path cost for ports of the same media type to indicate the preferred path, link type to indicate a point-to-point connection or shared-media connection, and edge port to indicate if the attached device can support fast forwarding. (References to “ports” in this section means “interfaces,” which includes both ports and trunks.)

Command Attributes

The following attributes are read-only and cannot be changed:

- **STA State** – Displays current state of this port within the Spanning Tree. (See Displaying Interface Settings on page 3-107 for additional information.)
 - **Discarding** - Port receives STA configuration messages, but does not forward packets.
 - **Learning** - Port has transmitted configuration messages for an interval set by the Forward Delay parameter without receiving contradictory information. Port address table is cleared, and the port begins learning addresses.
 - **Forwarding** - Port forwards packets, and continues learning addresses.
- **Trunk**¹³ – Indicates if a port is a member of a trunk.

The following interface attributes can be configured:

- **Spanning Tree** – Enables/disables STA on this interface. (Default: Enabled).
- **Priority** – Defines the priority used for this port in the Spanning Tree Protocol. If the path cost for all ports on a switch are the same, the port with the highest priority (i.e., lowest value) will be configured as an active link in the Spanning Tree. This


13. STA Port Configuration only

makes a port with higher priority less likely to be blocked if the Spanning Tree Protocol is detecting network loops. Where more than one port is assigned the highest priority, the port with lowest numeric identifier will be enabled.

- Default: 128
- Range: 0-240, in steps of 16
- **Path Cost** – This parameter is used by the STA to determine the best path between devices. Therefore, lower values should be assigned to ports attached to faster media, and higher values assigned to ports with slower media. (Path cost takes precedence over port priority.) Note that when the Path Cost Method is set to short (page 3-63), the maximum path cost is 65,535.
 - Range –
 - Ethernet: 200,000-20,000,000
 - Fast Ethernet: 20,000-2,000,000
 - Gigabit Ethernet: 2,000-200,000
 - Default –
 - Ethernet – Half duplex: 2,000,000; full duplex: 1,000,000; trunk: 500,000
 - Fast Ethernet – Half duplex: 200,000; full duplex: 100,000; trunk: 50,000
 - Gigabit Ethernet – Full duplex: 10,000; trunk: 5,000
- **Admin Link Type** – The link type attached to this interface.
 - Point-to-Point – A connection to exactly one other bridge.
 - Shared – A connection to two or more bridges.
 - Auto – The switch automatically determines if the interface is attached to a point-to-point link or to shared media. (This is the default setting.)
- **Admin Edge Port (Fast Forwarding)** – You can enable this option if an interface is attached to a LAN segment that is at the end of a bridged LAN or to an end node. Since end nodes **cannot** cause forwarding loops, they can pass directly through to the spanning tree forwarding state. Specifying Edge Ports provides quicker convergence for devices such as workstations or servers, retains the current forwarding database to reduce the amount of frame flooding required to rebuild address tables during reconfiguration events, does not cause the spanning tree to initiate reconfiguration when the interface changes state, and also overcomes other STA-related timeout problems. However, remember that Edge Port should only be enabled for ports connected to an end-node device. (Default: Disabled)
- **Migration** – If at any time the switch detects STP BPDUs, including Configuration or Topology Change Notification BPDUs, it will automatically set the selected interface to forced STP-compatible mode. However, you can also use the Protocol Migration button to manually re-check the appropriate BPDU format (RSTP or STP-compatible) to send on the selected interfaces. (Default: Disabled)

3 Configuring the Switch

Web – Click Spanning Tree, STA, Port Configuration or Trunk Configuration. Modify the required attributes, then click Apply.

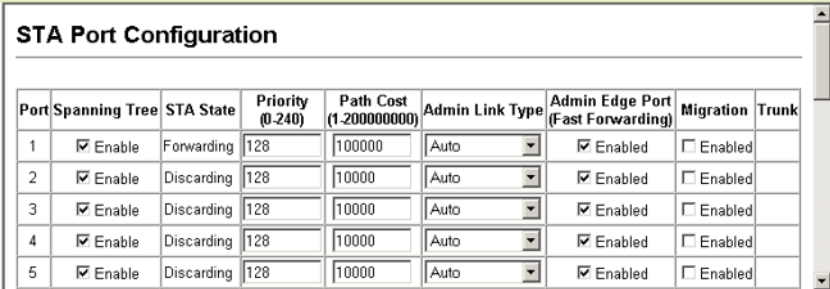

Port	Spanning Tree	STA State	Priority (0-240)	Path Cost (1-20000000)	Admin Link Type	Admin Edge Port (Fast Forwarding)	Migration	Trunk
1	<input checked="" type="checkbox"/> Enable	Forwarding	128	100000	Auto	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> Enabled	
2	<input checked="" type="checkbox"/> Enable	Discarding	128	10000	Auto	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> Enabled	
3	<input checked="" type="checkbox"/> Enable	Discarding	128	10000	Auto	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> Enabled	
4	<input checked="" type="checkbox"/> Enable	Discarding	128	10000	Auto	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> Enabled	
5	<input checked="" type="checkbox"/> Enable	Discarding	128	10000	Auto	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> Enabled	

Figure 3-62 STA Port Configuration

CLI – This example sets STA attributes for port 7.

```
Console(config)#interface ethernet 1/7 4-149
Console(config-if)#no spanning-tree spanning-disabled 4-179
Console(config-if)#spanning-tree port-priority 0 4-180
Console(config-if)#spanning-tree cost 50 4-180
Console(config-if)#spanning-tree link-type auto 4-183
Console(config-if)#no spanning-tree edge-port 4-181
Console(config-if)#spanning-tree protocol-migration 4-185
Console(config-if)#
```

Configuring Multiple Spanning Trees

MSTP generates a unique spanning tree for each instance. This provides multiple pathways across the network, thereby balancing the traffic load, preventing wide-scale disruption when a bridge node in a single instance fails, and allowing for faster convergence of a new topology for the failed instance.

By default all VLANs are assigned to the Internal Spanning Tree (MST Instance 0) that connects all bridges and LANs within the MST region. This switch supports up to 65 instances. You should try to group VLANs which cover the same general area of your network. However, remember that you must configure all bridges within the same MSTI Region (page 3-105) with the same set of instances, and the same instance (on each bridge) with the same set of VLANs. Also, note that RSTP treats each MSTI region as a single node, connecting all regions to the Common Spanning Tree.

To use multiple spanning trees:

1. Set the spanning tree type to MSTP (STA Configuration, page 3-103).
2. Enter the spanning tree priority for the selected MST instance (MSTP VLAN Configuration).
3. Add the VLANs that will share this MSTI (MSTP VLAN Configuration).

Note: All VLANs are automatically added to the IST (Instance 0).

To ensure that the MSTI maintains connectivity across the network, you must configure a related set of bridges with the same MSTI settings.

Command Attributes

- **MST Instance** – Instance identifier of this spanning tree. (Default: 0)
- **Priority** – The priority of a spanning tree instance. (Range: 0-61440 in steps of 4096; Options: 0, 4096, 8192, 12288, 16384, 20480, 24576, 28672, 32768, 36864, 40960, 45056, 49152, 53248, 57344, 61440; Default: 32768)
- **VLANs in MST Instance** – VLANs assigned this instance.
- **MST ID** – Instance identifier to configure. (Range: 0-4094; Default: 0)
- **VLAN ID** – VLAN to assign to this selected MST instance. (Range: 1-4094)

The other global attributes are described under “Displaying Global Settings,” page 3-103. The attributes displayed by the CLI for individual interfaces are described under “Displaying Interface Settings,” page 3-107

Web – Click Spanning Tree, MSTP, VLAN Configuration. Select an instance identifier from the list, set the instance priority, and click Apply. To add the VLAN members to an MSTI instance, enter the instance identifier, the VLAN identifier, and click Add.

MSTP VLAN Configuration

MST Instance ID:

Spanning Tree State	Enabled	Designated Root	32768.0.0000E9313131
Bridge ID	32768.0.0030F18FD550	Root Port	12
Max Age	20	Root Path Cost	10000
Hello Time	2	Configuration Changes	1
Forward Delay	15	Last Topology Change	1 d 5 h 30 min 32 s

Priority (0-61440):

MSTP VLAN Configuration:

VLAN in MST Instance:

VLAN 1

Remove

MST ID (0-57): VLAN ID:

Figure 3-63 MSTP VLAN Configuration

3 Configuring the Switch

CLI – This displays STA settings for instance 1, followed by settings for each port.

```
Console#show spanning-tree mst 2 4-186
Spanning-tree information
-----
Spanning tree mode           :MSTP
Spanning tree enable/disable :enable
Instance                     :2
Vlans configuration         :2
Priority                      :4096
Bridge Hello Time (sec.)    :2
Bridge Max Age (sec.)      :20
Bridge Forward Delay (sec.) :15
Root Hello Time (sec.)     :2
Root Max Age (sec.)        :20
Root Forward Delay (sec.)  :15
Max hops                     :20

Remaining hops              :20
Designated Root            :4096.2.0000E9313131
Current root port          :0
Current root cost          :0
Number of topology changes :0
Last topology changes time (sec.):646
Transmission limit        :3
Path Cost Method           :long
-----

Eth 1/ 7 information
-----
Admin status      : enable
Role              : disable
State             : discarding
External path cost : 10000
Internal path cost : 10000
Priority          : 128
Designated cost   : 0
Designated port   : 128.7
Designated root   : 4096.2.0000E9313131
Designated bridge : 4096.2.0000E9313131
Fast forwarding   : enable
Forward transitions : 0
Admin edge port   : enable
Oper edge port    : enable
Admin Link type   : auto
Oper Link type    : point-to-point
Spanning Tree Status : enable
:
```

CLI – This example sets the priority for MSTI 1, and adds VLANs 1-5 to this MSTI.

```
Console(config)#spanning-tree mst-configuration 4-175
Console(config-mst)#mst 1 priority 4096 4-177
Console(config-mstp)#mst 1 vlan 1-5 4-176
Console(config-mst)#
```


Displaying Interface Settings for MSTP

The MSTP Port Information and MSTP Trunk Information pages display the current status of ports and trunks in the selected MST instance.

Field Attributes

- **MST Instance ID** – Instance identifier to configure. (Range: 0-4094; Default: 0)

The other attributes are described under “Displaying Interface Settings,” page 3-107.

Web – Click Spanning Tree, MSTP, Port Information or Trunk Information. Select the required MST instance to display the current spanning tree values.

Port	STA Status	Forward Transitions	Designated Cost	Designated Bridge	Designated Port	Oper Link Type	Oper Edge Port	Port Role	Trunk Member
1	Forwarding	1	200000	32768.0.0030F1552000	128.24	Point-to-Point	Disabled	Root	
2	Discarding	0	200000	32768.0.0000E9313131	128.2	Point-to-Point	Enabled	Disabled	
3	Discarding	0	200000	32768.0.0000E9313131	128.3	Point-to-Point	Enabled	Disabled	
4	Discarding	0	200000	32768.0.0000E9313131	128.4	Point-to-Point	Enabled	Disabled	

Figure 3-64 MSTP Port Information

CLI – This displays STA settings for instance 0, followed by settings for each port. The settings for instance 0 are global settings that apply to the IST (page 3-100), the settings for other instances only apply to the local spanning tree.

```

Console#show spanning-tree mst 0
Spanning-tree information
-----
Spanning tree mode                :MSTP
Spanning tree enable/disable     :enable
Instance                          :0
Vlans configuration              :1-4094
Priority                          :32768
Bridge Hello Time (sec.)         :2
Bridge Max Age (sec.)            :20
Bridge Forward Delay (sec.)      :15
Root Hello Time (sec.)           :2
Root Max Age (sec.)              :20
Root Forward Delay (sec.)        :15
Max hops                          :20
Remaining hops                   :20
Designated Root                  :32768.0.0000ABCD0000
Current root port                 :1
Current root cost                 :200000
Number of topology changes       :1
Last topology changes time (sec.):645
Transmission limit               :3
Path Cost Method                 :long
  
```

4-186

3 Configuring the Switch

```
-----  
Eth 1/ 1 information  
-----  
Admin status      : enable  
Role              : root  
State             : forwarding  
External path cost : 100000  
Internal path cost : 100000  
Priority           : 128  
Designated cost   : 200000  
Designated port   : 128.24  
Designated root   : 32768.0.0000ABCD0000  
Designated bridge : 32768.0.0030F1552000  
Fast forwarding   : disable  
Forward transitions : 1  
Admin edge port   : enable  
Oper edge port    : disable  
Admin Link type   : auto  
Oper Link type    : point-to-point  
Spanning Tree Status : enable  
:
```

Configuring Interface Settings for MSTP

You can configure the STA interface settings for an MST Instance using the MSTP Port Configuration and MSTP Trunk Configuration pages.

Field Attributes

The following attributes are read-only and cannot be changed:

- **STA State** – Displays current state of this port within the Spanning Tree. (See Displaying Interface Settings on page 3-107 for additional information.)
 - **Discarding** - Port receives STA configuration messages, but does not forward packets.
 - **Learning** - Port has transmitted configuration messages for an interval set by the Forward Delay parameter without receiving contradictory information. Port address table is cleared, and the port begins learning addresses.
 - **Forwarding** - Port forwards packets, and continues learning addresses.
- **Trunk** – Indicates if a port is a member of a trunk. (STA Port Configuration only)

The following interface attributes can be configured:

- **MST Instance ID** – Instance identifier to configure. (Range: 0-4094; Default: 0)
- **Priority** – Defines the priority used for this port in the Spanning Tree Protocol. If the path cost for all ports on a switch are the same, the port with the highest priority (i.e., lowest value) will be configured as an active link in the Spanning Tree. This makes a port with higher priority less likely to be blocked if the Spanning Tree Protocol is detecting network loops. Where more than one port is assigned the highest priority, the port with lowest numeric identifier will be enabled.
 - Default: 128
 - Range: 0-240, in steps of 16

- **MST Path Cost** – This parameter is used by the MSTP to determine the best path between devices. Therefore, lower values should be assigned to ports attached to faster media, and higher values assigned to ports with slower media. (Path cost takes precedence over port priority.) Note that when the Path Cost Method is set to short (page 3-63), the maximum path cost is 65,535.
 - Range –
 - Ethernet: 200,000-20,000,000
 - Fast Ethernet: 20,000-2,000,000
 - Gigabit Ethernet: 2,000-200,000
 - Default –
 - Ethernet – Half duplex: 2,000,000; full duplex: 1,000,000; trunk: 500,000
 - Fast Ethernet – Half duplex: 200,000; full duplex: 100,000; trunk: 50,000
 - Gigabit Ethernet – Full duplex: 10,000; trunk: 5,000

Web – Click Spanning Tree, MSTP, Port Configuration or Trunk Configuration. Enter the priority and path cost for an interface, and click Apply.

MSTP Port Configuration

MST Instance ID:

Port	STA State	Priority (0-240)	MST Path Cost (1-200000000)	Trunk
1	Forwarding	<input type="text" value="128"/>	<input type="text" value="100000"/>	<input type="checkbox"/>
2	Discarding	<input type="text" value="128"/>	<input type="text" value="10000"/>	<input type="checkbox"/>
3	Discarding	<input type="text" value="128"/>	<input type="text" value="10000"/>	<input type="checkbox"/>
4	Discarding	<input type="text" value="0"/>	<input type="text" value="50"/>	<input type="checkbox"/>
5	Discarding	<input type="text" value="128"/>	<input type="text" value="10000"/>	<input type="checkbox"/>

Figure 3-65 MSTP Port Configuration

CLI – This example sets the MSTP attributes for port 4.

```

Console(config)#interface ethernet 1/4           4-149
Console(config-if)#spanning-tree mst port-priority 0 4-184
Console(config-if)#spanning-tree mst cost 50     4-183
Console(config-if)

```

VLAN Configuration

IEEE 802.1Q VLANs

In large networks, routers are used to isolate broadcast traffic for each subnet into separate domains. This switch provides a similar service at Layer 2 by using VLANs to organize any group of network nodes into separate broadcast domains. VLANs confine broadcast traffic to the originating group, and can eliminate broadcast storms in large networks. This also provides a more secure and cleaner network environment.

An IEEE 802.1Q VLAN is a group of ports that can be located anywhere in the network, but communicate as though they belong to the same physical segment.

VLANs help to simplify network management by allowing you to move devices to a new VLAN without having to change any physical connections. VLANs can be easily organized to reflect departmental groups (such as Marketing or R&D), usage groups (such as e-mail), or multicast groups (used for multimedia applications such as videoconferencing).

VLANs provide greater network efficiency by reducing broadcast traffic, and allow you to make network changes without having to update IP addresses or IP subnets. VLANs inherently provide a high level of network security since traffic must pass through a configured Layer 3 link to reach a different VLAN.


This switch supports the following VLAN features:

- Up to 255 VLANs based on the IEEE 802.1Q standard
- Distributed VLAN learning across multiple switches using explicit or implicit tagging and GVRP protocol
- Port overlapping, allowing a port to participate in multiple VLANs
- End stations can belong to multiple VLANs
- Passing traffic between VLAN-aware and VLAN-unaware devices
- Priority tagging

Assigning Ports to VLANs

Before enabling VLANs for the switch, you must first assign each port to the VLAN group(s) in which it will participate. By default all ports are assigned to VLAN 1 as untagged ports. Add a port as a tagged port if you want it to carry traffic for one or more VLANs, and any intermediate network devices or the host at the other end of the connection supports VLANs. Then assign ports on the other VLAN-aware network devices along the path that will carry this traffic to the same VLAN(s), either manually or dynamically using GVRP. However, if you want a port on this switch to participate in one or more VLANs, but none of the intermediate network devices nor the host at the other end of the connection supports VLANs, then you should add this port to the VLAN as an untagged port.

Note: VLAN-tagged frames can pass through VLAN-aware or VLAN-unaware network interconnection devices, but the VLAN tags should be stripped off before passing it on to any end-node host that does not support VLAN tagging.

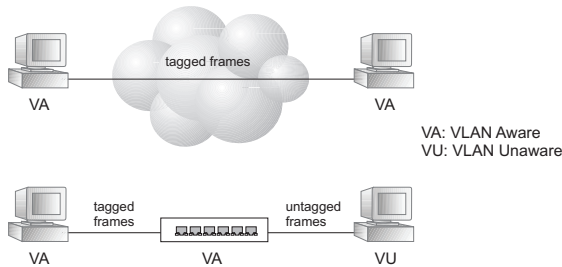

VLAN Classification – When the switch receives a frame, it classifies the frame in one of two ways. If the frame is untagged, the switch assigns the frame to an associated VLAN (based on the default VLAN ID of the receiving port). But if the frame is tagged, the switch uses the tagged VLAN ID to identify the port broadcast domain of the frame.

Port Overlapping – Port overlapping can be used to allow access to commonly shared network resources among different VLAN groups, such as file servers or printers. Note that if you implement VLANs which do not overlap, but still need to communicate, you can connect them by enabled routing on this switch.

Untagged VLANs – Untagged (or static) VLANs are typically used to reduce broadcast traffic and to increase security. A group of network users assigned to a VLAN form a broadcast domain that is separate from other VLANs configured on the switch. Packets are forwarded only between ports that are designated for the same VLAN. Untagged VLANs can be used to manually isolate user groups or subnets. However, you should use IEEE 802.3 tagged VLANs with GVRP whenever possible to fully automate VLAN registration.


Automatic VLAN Registration – GVRP (GARP VLAN Registration Protocol) defines a system whereby the switch can automatically learn the VLANs to which each end station should be assigned. If an end station (or its network adapter) supports the IEEE 802.1Q VLAN protocol, it can be configured to broadcast a message to your network indicating the VLAN groups it wants to join. When this switch receives these messages, it will automatically place the receiving port in the specified VLANs, and then forward the message to all other ports. When the message arrives at another switch that supports GVRP, it will also place the receiving port in the specified VLANs, and pass the message on to all other ports. VLAN requirements are propagated in this way throughout the network. This allows GVRP-compliant devices to be automatically configured for VLAN groups based solely on endstation requests.

To implement GVRP in a network, first add the host devices to the required VLANs (using the operating system or other application software), so that these VLANs can be propagated onto the network. For both the edge switches attached directly to

3 Configuring the Switch

these hosts, and core switches in the network, enable GVRP on the links between these devices. You should also determine security boundaries in the network and disable GVRP on the boundary ports to prevent advertisements from being propagated, or forbid those ports from joining restricted VLANs.

Note: If you have host devices that do not support GVRP, you should configure static or untagged VLANs for the switch ports connected to these devices (as described in “Adding Static Members to VLANs (VLAN Index)” on page 3-124). But you can still enable GVRP on these edge switches, as well as on the core switches in the network.

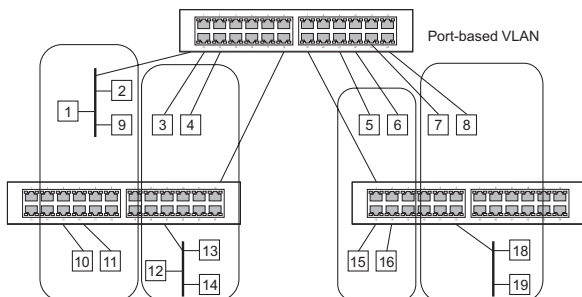

Forwarding Tagged/Untagged Frames

If you want to create a small port-based VLAN for devices attached directly to a single switch, you can assign ports to the same untagged VLAN. However, to participate in a VLAN group that crosses several switches, you should create a VLAN for that group and enable tagging on all ports.

Ports can be assigned to multiple tagged or untagged VLANs. Each port on the switch is therefore capable of passing tagged or untagged frames. When forwarding a frame from this switch along a path that contains any VLAN-aware devices, the switch should include VLAN tags. When forwarding a frame from this switch along a path that does not contain any VLAN-aware devices (including the destination host), the switch must first strip off the VLAN tag before forwarding the frame. When the switch receives a tagged frame, it will pass this frame onto the VLAN(s) indicated by the frame tag. However, when this switch receives an untagged frame from a VLAN-unaware device, it first decides where to forward the frame, and then inserts a VLAN tag reflecting the ingress port's default VID.

Enabling or Disabling GVRP (Global Setting)

GARP VLAN Registration Protocol (GVRP) defines a way for switches to exchange VLAN information in order to register VLAN members on ports across the network. VLANs are dynamically configured based on join messages issued by host devices and propagated throughout the network. GVRP must be enabled to permit automatic VLAN registration, and to support VLANs which extend beyond the local switch. (Default: Disabled)

Web – Click VLAN, 802.1Q VLAN, GVRP Status. Enable or disable GVRP, click Apply



Figure 3-66 Globally Enabling GVRP

CLI – This example enables GVRP for the switch.

```
Console(config)#bridge-ext gvrp
Console(config)#
```

4-203

Displaying Basic VLAN Information

The VLAN Basic Information page displays basic information on the VLAN type supported by the switch.

Field Attributes

- **VLAN Version Number**¹⁴ – The VLAN version used by this switch as specified in the IEEE 802.1Q standard.
- **Maximum VLAN ID** – Maximum VLAN ID recognized by this switch.
- **Maximum Number of Supported VLANs** – Maximum number of VLANs that can be configured on this switch.

Web – Click VLAN, 802.1Q VLAN, Basic Information.

VLAN Basic Information	
VLAN Version Number	1
Maximum VLAN ID	4094
Maximum Number of Supported VLANs	255

Figure 3-67 VLAN Basic Information

14. Web Only.

3 Configuring the Switch

CLI – Enter the following command.

```
Console#show bridge-ext 4-204
Max support vlan numbers: 255
Max support vlan ID: 4094
Extended multicast filtering services: No
Static entry individual port: Yes
VLAN learning: IVL
Configurable PVID tagging: Yes
Local VLAN capable: Yes
Traffic classes: Enabled
Global GVRP status: Disabled
GMRP: Disabled
Console#
```

Displaying Current VLANs

The VLAN Current Table shows the current port members of each VLAN and whether or not the port supports VLAN tagging. Ports assigned to a large VLAN group that crosses several switches should use VLAN tagging. However, if you just want to create a small port-based VLAN for one or two switches, you can disable tagging.

Command Attributes (Web)

- **VLAN ID** – ID of configured VLAN (1-4094).
- **Up Time at Creation** – Time this VLAN was created (i.e., System Up Time).
- **Status** – Shows how this VLAN was added to the switch.
 - **Dynamic GVRP**: Automatically learned via GVRP.
 - **Permanent**: Added as a static entry.
- **Egress Ports** – Shows all the VLAN port members.
- **Untagged Ports** – Shows the untagged VLAN port members.

Web – Click VLAN, 802.1Q VLAN, Current Table. Select any ID from the scroll-down list.

VLAN Current Table

VLAN ID: 1

Up Time at Creation	0 d 0 h 0 min 7 s
Status	Permanent

Egress Ports	Untagged Ports
Unit1 Port1	Unit1 Port1
Unit1 Port2	Unit1 Port2
Unit1 Port3	Unit1 Port3
Unit1 Port4	Unit1 Port4
Unit1 Port6	Unit1 Port6
Unit1 Port7	Unit1 Port7
Unit1 Port8	Unit1 Port8
Unit1 Port9	Unit1 Port9

Figure 3-68 VLAN Current Table

Command Attributes (CLI)

- **VLAN** – ID of configured VLAN (1-4094, no leading zeroes).
- **Type** – Shows how this VLAN was added to the switch.
 - **Dynamic:** Automatically learned via GVRP.
 - **Static:** Added as a static entry.
- **Name** – Name of the VLAN (1 to 32 characters).
- **Status** – Shows if this VLAN is enabled or disabled.
 - **Active:** VLAN is operational.
 - **Suspend:** VLAN is suspended; i.e., does not pass packets.
- **Ports / Channel groups** – Shows the VLAN interface members.

CLI – Current VLAN information can be displayed with the following command.

```

Console#show vlan id 1
VLAN Type      Name           Status  Ports/Channel groups
-----
1      Static      DefaultVlan   Active  Eth1/1  Eth1/2  Eth1/3  Eth1/4  Eth1/5
                                           Eth1/6  Eth1/7  Eth1/8  Eth1/9  Eth1/10
                                           Eth1/11 Eth1/12
Console#
  
```

Creating VLANs


Use the VLAN Static List to create or remove VLAN groups. To propagate information about VLAN groups used on this switch to external network devices, you must specify a VLAN ID for each of these groups.

Command Attributes

- **Current** – Lists all the current VLAN groups created for this system. Up to 255 VLAN groups can be defined. VLAN 1 is the default untagged VLAN.
- **New** – Allows you to specify the name and numeric identifier for a new VLAN group. (The VLAN name is only used for management on this system; it is not added to the VLAN tag.)
- **VLAN ID** – ID of configured VLAN (1-4094).
- **VLAN Name** – Name of the VLAN (1 to 32 characters).
- **Status (Web)** – Enables or disables the specified VLAN.
 - **Enable:** VLAN is operational.
 - **Disable:** VLAN is suspended; i.e., does not pass packets.
- **State (CLI)** – Enables or disables the specified VLAN.
 - **Active:** VLAN is operational.
 - **Suspend:** VLAN is suspended; i.e., does not pass packets.
- **Add** – Adds a new VLAN group to the current list.
- **Remove** – Removes a VLAN group from the current list. If any port is assigned to this group as untagged, it will be reassigned to VLAN group 1 as untagged.

3 Configuring the Switch

Web – Click VLAN, 802.1Q VLAN, Static List. To create a new VLAN, enter the VLAN ID and VLAN name, mark the Enable checkbox to activate the VLAN, and then click Add.

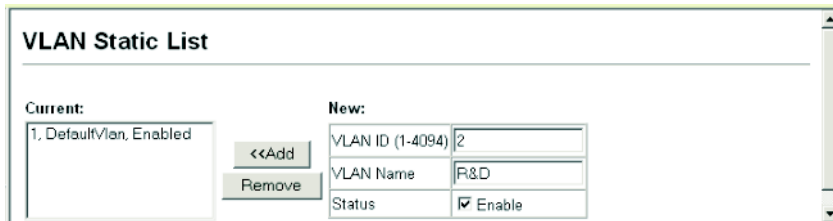

VLAN Static List

Current:

1, DefaultVlan, Enabled

New:

VLAN ID (1-4094)	2
VLAN Name	R&D
Status	<input checked="" type="checkbox"/> Enable

<<Add Remove

Figure 3-69 VLAN Static List - Creating VLANs

CLI – This example creates a new VLAN.

```
Console(config)#vlan database 4-189
Console(config-vlan)#vlan 2 name R&D media ethernet state active 4-190
Console(config-vlan)#end
Console#show vlan 4-197
VLAN Type Name Status Ports/Channel groups
-----
1 Static DefaultVlan Active Eth1/ 1 Eth1/ 2 Eth1/ 3 Eth1/ 4 Eth1/ 5
Eth1/ 6 Eth1/ 7 Eth1/ 8 Eth1/ 9 Eth1/10
Eth1/11 Eth1/12
2 Static R&D Active
Console(config-vlan)#
```

Adding Static Members to VLANs (VLAN Index)

Use the VLAN Static Table to configure port members for the selected VLAN index. Assign ports as tagged if they are connected to 802.1Q VLAN compliant devices, or untagged if they are not connected to any VLAN-aware devices. Or configure a port as forbidden to prevent the switch from automatically adding it to a VLAN via the GVRP protocol.

- Notes:**
1. You can also use the VLAN Static Membership by Port page to configure VLAN groups based on the port index (page 3-126). However, note that this configuration page can only add ports to a VLAN as tagged members.
 2. VLAN 1 is the default untagged VLAN containing all ports on the switch, and can only be modified by first reassigning the default port VLAN ID as described under “Configuring VLAN Behavior for Interfaces” on page 3-127.

Command Attributes

- **VLAN** – ID of configured VLAN (1-4094).
- **Name** – Name of the VLAN (1 to 32 characters).
- **Status** – Enables or disables the specified VLAN.
 - **Enable:** VLAN is operational.
 - **Disable:** VLAN is suspended; i.e., does not pass packets.
- **Port** – Port identifier.
- **Trunk** – Trunk identifier.
- **Membership Type** – Select VLAN membership for each interface by marking the appropriate radio button for a port or trunk:
 - **Tagged:** Interface is a member of the VLAN. All packets transmitted by the port will be tagged, that is, carry a tag and therefore carry VLAN or CoS information.
 - **Untagged:** Interface is a member of the VLAN. All packets transmitted by the port will be untagged, that is, not carry a tag and therefore not carry VLAN or CoS information. Note that an interface must be assigned to at least one group as an untagged port.
 - **Forbidden:** Interface is forbidden from automatically joining the VLAN via GVRP. For more information, see “Automatic VLAN Registration” on page 3-119.
 - **None:** Interface is not a member of the VLAN. Packets associated with this VLAN will not be transmitted by the interface.
- **Trunk Member** – Indicates if a port is a member of a trunk. To add a trunk to the selected VLAN, use the last table on the VLAN Static Table page.

Web – Click VLAN, 802.1Q VLAN, Static Table. Select a VLAN ID from the scroll-down list. Modify the VLAN name and status if required. Select the membership type by marking the appropriate radio button in the list of ports or trunks. Click Apply.

VLAN Static Table

VLAN:

Name	<input type="text" value="R&D"/>
Status	<input checked="" type="checkbox"/> Enable

Port	Tagged	Untagged	Forbidden	None	Trunk Member
1	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
2	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
3	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	
4	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	
5	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	

Figure 3-70 VLAN Static Table - Adding Static Members

3 Configuring the Switch

CLI – The following example adds tagged and untagged ports to VLAN 2.

```
Console(config)#interface ethernet 1/1 4-149
Console(config-if)#switchport allowed vlan add 2 tagged 4-195
Console(config-if)#exit
Console(config)#interface ethernet 1/2
Console(config-if)#switchport allowed vlan add 2 untagged
Console(config-if)#exit
Console(config)#interface ethernet 1/13
Console(config-if)#switchport allowed vlan add 2 tagged
Console(config-if)#
```

Adding Static Members to VLANs (Port Index)

Use the VLAN Static Membership by Port menu to assign VLAN groups to the selected interface as a tagged member.

Command Attributes

- **Interface** – Port or trunk identifier.
- **Member** – VLANs for which the selected interface is a tagged member.
- **Non-Member** – VLANs for which the selected interface is not a tagged member.

Web – Open VLAN, 802.1Q VLAN, Static Membership by Port. Select an interface from the scroll-down box (Port or Trunk). Click Query to display membership information for the interface. Select a VLAN ID, and then click Add to add the interface as a tagged member, or click Remove to remove the interface. After configuring VLAN membership for each interface, click Apply.

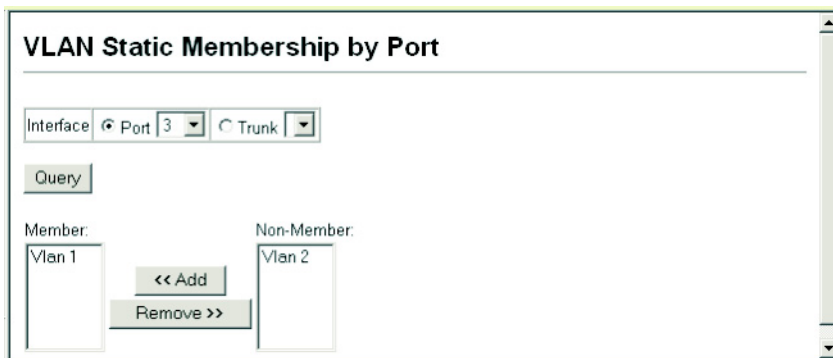


Figure 3-71 VLAN Static Membership by Port

CLI – This example adds Port 3 to VLAN 1 as a tagged port, and removes Port 3 from VLAN 2.

```
Console(config)#interface ethernet 1/3 4-149
Console(config-if)#switchport allowed vlan add 1 tagged 4-195
Console(config-if)#switchport allowed vlan remove 2
Console(config-if)#
```

Configuring VLAN Behavior for Interfaces

You can configure VLAN behavior for specific interfaces, including the default VLAN identifier (PVID), accepted frame types, ingress filtering, GVRP status, and GARP timers.

Command Usage

- **GVRP** – GARP VLAN Registration Protocol defines a way for switches to exchange VLAN information in order to automatically register VLAN members on interfaces across the network.
- **GARP** – Group Address Registration Protocol is used by GVRP to register or deregister client attributes for client services within a bridged LAN. The default values for the GARP timers are independent of the media access method or data rate. These values should not be changed unless you are experiencing difficulties with GVRP registration/deregistration.

Command Attributes

- **PVID** – VLAN ID assigned to untagged frames received on the interface. (Default: 1)
 - If an interface is not a member of VLAN 1 and you assign its PVID to this VLAN, the interface will automatically be added to VLAN 1 as an untagged member. For all other VLANs, an interface must first be configured as an untagged member before you can assign its PVID to that group.
- **Acceptable Frame Type** – Sets the interface to accept all frame types, including tagged or untagged frames, or only tagged frames. When set to receive all frame types, any received frames that are untagged are assigned to the default VLAN. (Option: All, Tagged; Default: All)
- **Ingress Filtering** – Determines how to process frames tagged for VLANs for which the ingress port is not a member. (Default: Disabled)
 - Ingress filtering only affects tagged frames.
 - If ingress filtering is disabled and a port receives frames tagged for VLANs for which it is not a member, these frames will be flooded to all other ports (except for those VLANs explicitly forbidden on this port).
 - If ingress filtering is enabled and a port receives frames tagged for VLANs for which it is not a member, these frames will be discarded.
 - Ingress filtering does not affect VLAN independent BPDU frames, such as GVRP or STP. However, they do affect VLAN dependent BPDU frames, such as GMRP.
- **GVRP Status** – Enables/disables GVRP for the interface. GVRP must be globally enabled for the switch before this setting can take effect. (See “Displaying Bridge Extension Capabilities” on page 3-14.) When disabled, any GVRP packets received on this port will be discarded and no GVRP registrations will be propagated from other ports. (Default: Disabled)
- **GARP Join Timer**¹⁵ – The interval between transmitting requests/queries to participate in a VLAN group. (Range: 20-1000 centiseconds; Default: 20)
- **GARP Leave Timer**¹⁵ – The interval a port waits before leaving a VLAN group. This time should be set to more than twice the join time. This ensures that after a

15. Timer settings must follow this rule: 2 x (join timer) < leave timer < leaveAll timer

3 Configuring the Switch

Leave or LeaveAll message has been issued, the applicants can rejoin before the port actually leaves the group. (Range: 60-3000 centiseconds; Default: 60)

- **GARP LeaveAll Timer**¹⁵ – The interval between sending out a LeaveAll query message for VLAN group participants and the port leaving the group. This interval should be considerably larger than the Leave Time to minimize the amount of traffic generated by nodes rejoining the group. (Range: 500-18000 centiseconds; Default: 1000)
- **Mode** – Indicates VLAN membership mode for an interface. (Default: Hybrid)
 - **1Q Trunk** – Specifies a port as an end-point for a VLAN trunk. A trunk is a direct link between two switches, so the port transmits tagged frames that identify the source VLAN. Note that frames belonging to the port’s default VLAN (i.e., associated with the PVID) are also transmitted as tagged frames.
 - **Hybrid** – Specifies a hybrid VLAN interface. The port may transmit tagged or untagged frames.
- **Trunk Member** – Indicates if a port is a member of a trunk. To add a trunk to the selected VLAN, use the last table on the VLAN Static Table page.

Web – Click VLAN, 802.1Q VLAN, Port Configuration or Trunk Configuration. Fill in the required settings for each interface, click Apply.

VLAN Port Configuration									
Port	PVID	Acceptable Frame Type	Ingress Filtering	GVRP Status	GARP Join Timer (Centi Seconds) (20-1000)	GARP Leave Timer (Centi Seconds) (60-3000)	GARP LeaveAll Timer (Centi Seconds) (500-18000)	Mode	Trunk Member
1	1	ALL	<input type="checkbox"/> Enabled	<input type="checkbox"/> Enabled	20	60	1000	Hybrid	
2	1	ALL	<input type="checkbox"/> Enabled	<input type="checkbox"/> Enabled	20	60	1000	Hybrid	
3	3	Tagged	<input type="checkbox"/> Enabled	<input type="checkbox"/> Enabled	20	60	1000	Hybrid	
4	1	ALL	<input type="checkbox"/> Enabled	<input type="checkbox"/> Enabled	20	60	1000	Hybrid	
5	1	ALL	<input checked="" type="checkbox"/> Enabled	<input checked="" type="checkbox"/> Enabled	30	90	2000	Hybrid	
6	1	ALL	<input type="checkbox"/> Enabled	<input type="checkbox"/> Enabled	20	60	1000	Hybrid	

Figure 3-72 VLAN Port Configuration

CLI – This example sets port 3 to accept only tagged frames, assigns PVID 3 as the native VLAN ID, enables GVRP, sets the GARP timers, and then sets the switchport mode to hybrid.


```

Console(config)#interface ethernet 1/3                4-149
Console(config-if)#switchport acceptable-frame-types tagged 4-192
Console(config-if)#switchport ingress-filtering      4-193
Console(config-if)#switchport native vlan 3         4-194
Console(config-if)#switchport gvrp                 4-204
Console(config-if)#garp timer join 20               4-205
Console(config-if)#garp timer leave 90
Console(config-if)#garp timer leaveall 2000
Console(config-if)#switchport mode hybrid          4-192
Console(config-if)#

```

Configuring Private VLANs

Private VLANs provide port-based security and isolation between ports within the assigned VLAN. Data traffic on downlink ports can only be forwarded to, and from, uplink ports. (Note that private VLANs and normal VLANs can exist simultaneously within the same switch.)

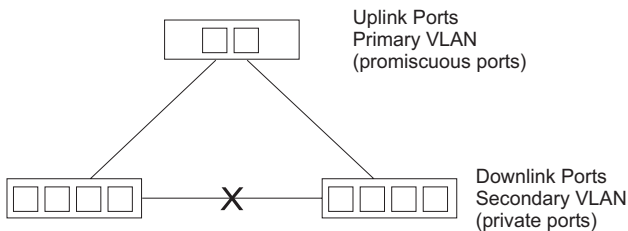

Enabling Private VLANs

Use the Private VLAN Status page to enable/disable the Private VLAN function.

Web – Click VLAN, Private VLAN, Status. Select Enable or Disable from the scroll-down box, and click Apply.



Figure 3-73 Private VLAN Status

CLI – This example enables private VLANs.

```

Console(config)#pvlan                                4-198
Console(config)#

```

3 Configuring the Switch

Configuring Uplink and Downlink Ports

Use the Private VLAN Link Status page to set ports as downlink or uplink ports. Ports designated as downlink ports can not communicate with any other ports on the switch except for the uplink ports. Uplink ports can communicate with any other ports on the switch and with any designated downlink ports.

Web – Click VLAN, Private VLAN, Link Status. Mark the ports that will serve as uplinks and downlinks for the private VLAN, then click Apply.

Port	Uplink	Downlink	None	Trunk Member
1	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>
2	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>
3	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>
4	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>
5	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="checkbox"/>
6	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="checkbox"/>
7	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="checkbox"/>

Figure 3-74 Private VLAN Link Status

CLI – This configures ports 3 and 4 as uplinks and ports 5 and 6 as downlinks.

```
Console(config)#pvlan up-link ethernet 1/3 down-link ethernet 1/5 4-198
Console(config)#pvlan up-link ethernet 1/3 down-link ethernet 1/6
Console(config)#end
Console#show pvlan
Private VLAN status: Enabled
Up-link port:
 Ethernet 1/3
Down-link port:
 Ethernet 1/5
 Ethernet 1/6
Console#
```

Configuring Protocol-Based VLANs

The network devices required to support multiple protocols cannot be easily grouped into a common VLAN. This may require non-standard devices to pass traffic between different VLANs in order to encompass all the devices participating in a specific protocol. This kind of configuration deprives users of the basic benefits of VLANs, including security and easy accessibility.

To avoid these problems, you can configure this switch with protocol-based VLANs that divide the physical network into logical VLAN groups for each required protocol. When a frame is received at a port, its VLAN membership can then be determined based on the protocol type being used by the inbound packets.

Command Usage

To configure protocol-based VLANs, follow these steps:

1. First configure VLAN groups for the protocols you want to use (page 3-123). Although not mandatory, we suggest configuring a separate VLAN for each major protocol running on your network. Do not add port members at this time.
2. Create a protocol group for each of the protocols you want to assign to a VLAN using the Protocol VLAN Configuration page.
3. Then map the protocol for each interface to the appropriate VLAN using the Protocol VLAN Port Configuration page.

Configuring Protocol Groups

Create a protocol group for one or more protocols.

Command Attributes

- **Protocol Group ID** – Group identifier of this protocol group. (Range: 1-2147483647)
- **Frame Type**¹⁶ – Frame type used by this protocol. (Options: Ethernet, RFC_1042, LLC_other)
- **Protocol Type** – The only option for the LLC_other frame type is IPX_raw. The options for all other frames types include: IP, ARP, RARP.

Web – Click VLAN, Protocol VLAN, Configuration. Enter a protocol group ID, frame type and protocol type, then click Apply.

Protocol VLAN Configuration

<p>Current:</p> <div style="border: 1px solid gray; padding: 5px; margin-bottom: 5px;">Group 1, Ethernet.08 00</div> <div style="border: 1px solid gray; padding: 5px; margin-bottom: 5px;">Group 1, Ethernet.08 06</div>	<div style="border: 1px solid gray; padding: 2px; margin-bottom: 5px;"><<Add</div> <div style="border: 1px solid gray; padding: 2px;">Remove</div>	<p>New:</p> <div style="border: 1px solid gray; padding: 5px; margin-bottom: 5px;">Protocol Group ID (1-2147483647) <input style="width: 100%;" type="text"/></div> <div style="border: 1px solid gray; padding: 5px; margin-bottom: 5px;">Frame Type Ethernet ▾</div> <div style="border: 1px solid gray; padding: 5px;">Protocol Type Ip ▾</div>
--	--	---

Figure 3-75 Protocol VLAN Configuration

CLI – The following creates protocol group 1, and then specifies Ethernet frames with IP and ARP protocol types.

```

Console(config)#protocol-vlan protocol-group 1
add frame-type ethernet protocol-type ip
Console(config)#protocol-vlan protocol-group 1
add frame-type ethernet protocol-type arp
Console(config)#
```

4-200

16. SNAP frame types are not supported by this switch due to hardware limitations.

3 Configuring the Switch

Mapping Protocols to VLANs

Map a protocol group to a VLAN for each interface that will participate in the group.

Command Usage

- When creating a protocol-based VLAN, only assign interfaces using this configuration screen. If you assign interfaces using any of the other VLAN menus such as the VLAN Static Table (page 3-124) or VLAN Static Membership by Port menu (page 3-126), these interfaces will admit traffic of any protocol type into the associated VLAN.
- When a frame enters a port that has been assigned to a protocol VLAN, it is processed in the following manner:
 - If the frame is tagged, it will be processed according to the standard rules applied to tagged frames.
 - If the frame is untagged and the protocol type matches, the frame is forwarded to the appropriate VLAN.
 - If the frame is untagged but the protocol type does not match, the frame is forwarded to the default VLAN for this interface.

Command Attributes

- **Interface** – Port or trunk identifier.
- **Protocol Group ID** – Group identifier of this protocol group. (Range: 1-2147483647)
- **VLAN ID** – VLAN to which matching protocol traffic is forwarded. (Range: 1-4094)

Web – Click VLAN, Protocol VLAN, Port Configuration. Select a a port or trunk, enter a protocol group ID, the corresponding VLAN ID, and click Apply.

The screenshot shows the 'Protocol Vlan Port Configuration' web interface. At the top, there is a title bar. Below it, there are two radio buttons: 'Port' (selected) and 'Trunk'. The 'Port' radio button is followed by a dropdown menu showing '1'. Below this, there is a 'Query' button. The interface is divided into two sections: 'Current:' and 'New:'. The 'Current:' section contains a list box with 'Group 1, Vlan 3'. The 'New:' section contains two input fields: 'Protocol Group ID (1-2147483647)' and 'Vlan ID'. The 'Vlan ID' field has a dropdown menu showing '1'. Between the 'Current:' and 'New:' sections, there are two buttons: '<<Add' and 'Remove'.

Figure 3-76 Protocol VLAN Port Configuration

CLI – The following maps the traffic entering Port 1 which matches the protocol type specified in protocol group 1 to VLAN 3.

```
Console(config)#interface ethernet 1/1
Console(config-if)#protocol-vlan protocol-group 1 vlan 3
Console(config-if)#
```

4-200

Class of Service Configuration

Class of Service (CoS) allows you to specify which data packets have greater precedence when traffic is buffered in the switch due to congestion. This switch supports CoS with eight priority queues for each port. Data packets in a port's high-priority queue will be transmitted before those in the lower-priority queues. You can set the default priority for each interface, and configure the mapping of frame priority tags to the switch's priority queues.

Layer 2 Queue Settings

Setting the Default Priority for Interfaces

You can specify the default port priority for each interface on the switch. All untagged packets entering the switch are tagged with the specified default port priority, and then sorted into the appropriate priority queue at the output port.

Command Usage

- This switch provides eight priority queues for each port. It uses Weighted Round Robin to prevent head-of-queue blockage.
- The default priority applies for an untagged frame received on a port set to accept all frame types (i.e., receives both untagged and tagged frames). This priority does not apply to IEEE 802.1Q VLAN tagged frames. If the incoming frame is an IEEE 802.1Q VLAN tagged frame, the IEEE 802.1p User Priority bits will be used.
- If the output port is an untagged member of the associated VLAN, these frames are stripped of all VLAN tags prior to transmission.

Command Attributes

- **Default Priority**¹⁷ – The priority that is assigned to untagged frames received on the specified interface. (Range: 0 - 7, Default: 0)
- **Number of Egress Traffic Classes** – The number of queue buffers provided for each port.

17. CLI displays this information as "Priority for untagged traffic."

3 Configuring the Switch

Web – Click Priority, Default Port Priority or Default Trunk Priority. Modify the default priority for any interface, then click Apply.

Port	Default Priority (0-7)	Number of Egress Traffic Classes	Trunk
1	0	8	
2	0	8	
3	5	8	
4	0	8	
5	0	8	
6	0	8	
7	0	8	
8	0	8	

Figure 3-77 Default Port Priority

CLI – This example assigns a default priority of 5 to port 3.

```
Console(config)#interface ethernet 1/3 4-149
Console(config-if)#switchport priority default 5 4-209
Console(config-if)#end
Console#show interfaces switchport ethernet 1/5 4-158
Information of Eth 1/5
Broadcast threshold: Enabled, 500 packets/second
Lacp status: Disabled
Ingress rate limit: disable,1000M bits per second
Egress rate limit: disable,1000M bits per second
VLAN membership mode: Hybrid
Ingress rule: Disabled
Acceptable frame type: All frames
Native VLAN: 1
Priority for untagged traffic: 5
Gvrp status: Disabled
Allowed Vlan: 1(u),
Forbidden Vlan:
Console#
```

Mapping CoS Values to Egress Queues

This switch processes Class of Service (CoS) priority tagged traffic by using eight priority queues for each port, with service schedules based on strict or Weighted Round Robin (WRR). Up to eight separate traffic priorities are defined in IEEE 802.1p. The default priority levels are assigned according to recommendations in the IEEE 802.1p standard as shown in the following table.

Table 3-8 Mapping CoS Values to Egress Queues

Queue	0	1	2	3	4	5	6	7
Priority	2	0	1	3	4	5	6	7

The priority levels recommended in the IEEE 802.1p standard for various network applications are shown in the following table. However, you can map the priority levels to the switch's output queues in any way that benefits application traffic for your own network.

Table 3-9 CoS Priority Levels

Priority Level	Traffic Type
1	Background
2	(Spare)
0 (default)	Best Effort
3	Excellent Effort
4	Controlled Load
5	Video, less than 100 milliseconds latency and jitter
6	Voice, less than 10 milliseconds latency and jitter
7	Network Control

Command Attributes

- **Priority** – CoS value. (Range: 0-7, where 7 is the highest priority)
- **Traffic Class**¹⁸ – Output queue buffer. (Range: 0-7, where 7 is the highest CoS priority queue)

18. CLI shows Queue ID.

3 Configuring the Switch

Web – Click Priority, Traffic Classes. Assign priorities to the traffic classes (i.e., output queues), then click Apply.

Priority	Traffic Class
0	<input type="text" value="2"/> (0-7)
1	<input type="text" value="0"/> (0-7)
2	<input type="text" value="1"/> (0-7)
3	<input type="text" value="3"/> (0-7)
4	<input type="text" value="4"/> (0-7)
5	<input type="text" value="5"/> (0-7)
6	<input type="text" value="6"/> (0-7)
7	<input type="text" value="7"/> (0-7)

Figure 3-78 Traffic Classes

CLI – The following example shows how to change the CoS assignments to a one-to-one mapping.

```
Console(config)#interface ethernet 1/1                               4-149
Console(config)#queue cos-map 0 0                                  4-210
Console(config)#queue cos-map 1 1
Console(config)#queue cos-map 2 2
Console(config)#exit
Console#show queue cos-map ethernet 1/1                            4-212
Information of Eth 1/1
Traffic Class : 0 1 2 3 4 5 6 7
Priority Queue: 0 1 2 3 4 5 6 7
Information of Eth 1/2
Traffic Class : 0 1 2 3 4 5 6 7
Priority Queue: 0 1 2 3 4 5 6 7
:
```

* Mapping specific values for CoS priorities is implemented as an interface configuration command, but any changes will apply to the all interfaces on the switch.

Selecting the Queue Mode

You can set the switch to service the queues based on a strict rule that requires all traffic in a higher priority queue to be processed before lower priority queues are serviced, or use Weighted Round-Robin (WRR) queuing that specifies a relative weight of each queue. WRR uses a predefined relative weight for each queue that determines the percentage of service time the switch services each queue before moving on to the next queue. This prevents the head-of-line blocking that can occur with strict priority queuing.

Command Attributes

- **WRR** - Weighted Round-Robin shares bandwidth at the egress ports by using scheduling weights 1, 2, 4, 6, 8, 10, 12, 14 for queues 0 through 7 respectively. (This is the default selection.)
- **Strict** - Services the egress queues in sequential order, transmitting all traffic in the higher priority queues before servicing lower priority queues.

Web – Click Priority, Queue Mode. Select Strict or WRR, then click Apply.



Figure 3-79 Queue Mode

CLI – The following sets the queue mode to strict priority service mode.

```

Console(config)#queue mode strict          4-211
Console(config)#exit
Console#show queue mode                    4-211

Queue mode: strict
Console#

```

Setting the Service Weight for Traffic Classes

This switch uses the Weighted Round Robin (WRR) algorithm to determine the frequency at which it services each priority queue. As described in “Mapping CoS Values to Egress Queues” on page 3-135, the traffic classes are mapped to one of the eight egress queues provided for each port. You can assign a weight to each of these queues (and thereby to the corresponding traffic priorities). This weight sets the frequency at which each queue will be polled for service, and subsequently affects the response time for software applications assigned a specific priority value.

Command Attributes

- **WRR Setting Table**¹⁹ – Displays a list of weights for each traffic class (i.e., queue).
- **Weight Value** – Set a new weight for the selected traffic class. (Range: 1-15)

19. CLI shows Queue ID.

3 Configuring the Switch

Web – Click Priority, Queue Scheduling. Select the interface, highlight a traffic class (i.e., output queue), enter a weight, then click Apply.

Queue Scheduling

Interface Port 1 Trunk

Select

WRR Setting Table	Traffic Class 0 - weight 1
	Traffic Class 1 - weight 2
	Traffic Class 2 - weight 4
	Traffic Class 3 - weight 6
	Traffic Class 4 - weight 8

Weight Value (1-15)

Figure 3-80 Queue Scheduling

CLI – The following example shows how to assign WRR weights to each of the priority queues.

```
Console(config)#queue bandwidth 1 3 5 7 9 11 13 15 4-210
Console(config)#exit
Console#show queue bandwidth 4-212
Information of Eth 1/1
Queue ID Weight
-----
0          1
1          3
2          5
3          7
4          9
5         11
6         13
7         15
Information of Eth 1/2
Queue ID Weight
:
```


Layer 3/4 Priority Settings

Mapping Layer 3/4 Priorities to CoS Values

This switch supports several common methods of prioritizing layer 3/4 traffic to meet application requirements. Traffic priorities can be specified in the IP header of a frame, using the priority bits in the Type of Service (ToS) octet or the number of the TCP port. If priority bits are used, the ToS octet may contain three bits for IP Precedence or six bits for Differentiated Services Code Point (DSCP) service. When these services are enabled, the priorities are mapped to a Class of Service value by the switch, and the traffic then sent to the corresponding output queue.

Because different priority information may be contained in the traffic, this switch maps priority values to the output queues in the following manner:

- The precedence for priority mapping is IP Port Priority, IP Precedence or DSCP Priority, and then Default Port Priority.
- IP Precedence and DSCP Priority cannot both be enabled. Enabling one of these priority types will automatically disable the other.

Selecting IP Precedence/DSCP Priority

The switch allows you to choose between using IP Precedence or DSCP priority. Select one of the methods or disable this feature.

Command Attributes

- **Disabled** – Disables both priority services. (This is the default setting.)
- **IP Precedence** – Maps layer 3/4 priorities using IP Precedence.
- **IP DSCP** – Maps layer 3/4 priorities using Differentiated Services Code Point Mapping.

Web – Click Priority, IP Precedence/DSCP Priority Status. Select Disabled, IP Precedence or IP DSCP from the scroll-down menu, then click Apply.

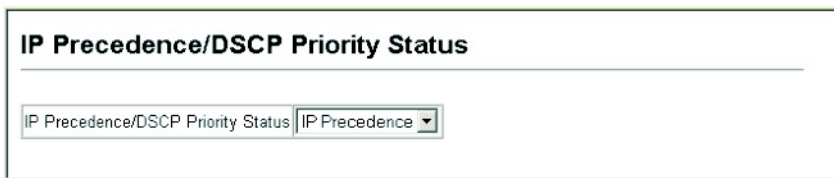


Figure 3-81 IP Precedence/DSCP Priority Status

CLI – The following example enables IP Precedence service on the switch.

```
Console(config)#map ip precedence
Console(config)#
```

4-214

3 Configuring the Switch

Mapping IP Precedence

The Type of Service (ToS) octet in the IPv4 header includes three precedence bits defining eight different priority levels ranging from highest priority for network control packets to lowest priority for routine traffic. The default IP Precedence values are mapped one-to-one to Class of Service values (i.e., Precedence value 0 maps to CoS value 0, and so forth). Bits 6 and 7 are used for network control, and the other bits for various application types. ToS bits are defined in the following table.

Table 3-10 Mapping IP Precedence

Priority Level	Traffic Type	Priority Level	Traffic Type
7	Network Control	3	Flash
6	Internetwork Control	2	Immediate
5	Critical	1	Priority
4	Flash Override	0	Routine

Command Attributes

- **IP Precedence Priority Table** – Shows the IP Precedence to CoS map.
- **Class of Service Value** – Maps a CoS value to the selected IP Precedence value. Note that “0” represents low priority and “7” represent high priority.

Web – Click Priority, IP Precedence Priority. Select an entry from the IP Precedence Priority Table, enter a value in the Class of Service Value field, and then click Apply.

IP Precedence Priority

IP Precedence Priority Table
IP Precedence 0 - CoS 0
IP Precedence 1 - CoS 1
IP Precedence 2 - CoS 2
IP Precedence 3 - CoS 3
IP Precedence 4 - CoS 4
IP Precedence 5 - CoS 5
IP Precedence 6 - CoS 6
IP Precedence 7 - CoS 7

Class of Service Value (0-7)

Restore Default

Figure 3-82 IP Precedence Priority

CLI – The following example globally enables IP Precedence service on the switch, maps IP Precedence value 1 to CoS value 0 (on port 1), and then displays the IP Precedence settings.

```

Console(config)#map ip precedence                               4-214
Console(config)#interface ethernet 1/1                         4-149
Console(config-if)#map ip precedence 1 cos 0                   4-215
Console(config-if)#end
Console#show map ip precedence ethernet 1/1                    4-218
Precedence mapping status: disabled

  Port      Precedence COS
  -----
  Eth 1/ 1      0  0
  Eth 1/ 1      1  0
  Eth 1/ 1      2  2
  Eth 1/ 1      3  3
  Eth 1/ 1      4  4
  Eth 1/ 1      5  5
  Eth 1/ 1      6  6
  Eth 1/ 1      7  7
Console#

```

* Mapping specific values for IP Precedence is implemented as an interface configuration command, but any changes will apply to the all interfaces on the switch.

Mapping DSCP Priority

The DSCP is six bits wide, allowing coding for up to 64 different forwarding behaviors. The DSCP replaces the ToS bits, but it retains backward compatibility with the three precedence bits so that non-DSCP compliant, ToS-enabled devices, will not conflict with the DSCP mapping. Based on network policies, different kinds of traffic can be marked for different kinds of forwarding. The DSCP default values are defined in the following table. Note that all the DSCP values that are not specified are mapped to CoS value 0.

Table 3-11 Mapping DSCP Priority

IP DSCP Value	CoS Value
0	0
8	1
10, 12, 14, 16	2
18, 20, 22, 24	3
26, 28, 30, 32, 34, 36	4
38, 40, 42	5
48	6
46, 56	7

Command Attributes

- **DSCP Priority Table** – Shows the DSCP Priority to CoS map.
- **Class of Service Value** – Maps a CoS value to the selected DSCP Priority value. Note that “0” represents low priority and “7” represent high priority.

Note: IP DSCP settings apply to all interfaces.

3 Configuring the Switch

Web – Click Priority, IP DSCP Priority. Select an entry from the DSCP table, enter a value in the Class of Service Value field, then click Apply.

IP DSCP Priority

DSCP Priority Table

Class of Service Value (0-7)

Restore Default

Figure 3-83 IP DSCP Priority

CLI – The following example globally enables DSCP Priority service on the switch, maps DSCP value 0 to CoS value 1 (on port 1), and then displays the DSCP Priority settings.

```
Console(config)#map ip dscp 4-216
Console(config)#interface ethernet 1/1 4-149
Console(config-if)#map ip dscp 1 cos 0 4-216
Console(config-if)#end
Console#show map ip dscp ethernet 1/1 4-219
DSCP mapping status: disabled

Port      DSCP COS
-----
Eth 1/ 1  0  0
Eth 1/ 1  1  0
Eth 1/ 1  2  0
Eth 1/ 1  3  0
:
Eth 1/ 1  61 0
Eth 1/ 1  62 0
Eth 1/ 1  63 0
Console#
```

* Mapping specific values for IP DSCP is implemented as an interface configuration command, but any changes will apply to the all interfaces on the switch.

Mapping IP Port Priority

You can also map network applications to Class of Service values based on the IP port number (i.e., TCP/UDP port number) in the frame header. Some of the more common TCP service ports include: HTTP: 80, FTP: 21, Telnet: 23 and POP3: 110.

Command Attributes

- **IP Port Priority Status** – Enables or disables the IP port priority.
- **IP Port Priority Table** – Shows the IP port to CoS map.
- **IP Port Number (TCP/UDP)** – Set a new IP port number.
- **Class of Service Value** – Sets a CoS value for a new IP port. Note that “0” represents low priority and “7” represent high priority.

Note: IP Port Priority settings apply to all interfaces.

Web – Click Priority, IP Port Status. Set IP Port Priority Status to Enabled.

IP Port Priority Status

IP Port Priority Global Status Enabled

Figure 3-84 IP Port Priority Status

Click Priority, IP Port Priority. Enter the port number for a network application in the IP Port Number box and the new CoS value in the Class of Service box, and then click Apply.

IP Port Priority

IP Port Priority Table	(none)
IP Port Number (TCP/UDP)	80
Class of Service Value (0-7)	0

Remove IP Port

Figure 3-85 IP Port Priority

3 Configuring the Switch

CLI – The following example globally enables IP Port Priority service on the switch, maps HTTP traffic (on port 1) to CoS value 0, and then displays the IP Port Priority settings.

```
Console(config)#map ip port 4-213
Console(config)#interface ethernet 1/1 4-149
Console(config-if)#map ip port 80 cos 0 4-214
Console(config-if)#end
Console#show map ip port ethernet 1/5 4-217
TCP port mapping status: disabled

Port          Port no. COS
-----
Eth 1/ 1      80  0
Console#
```

* Mapping specific values for IP Port Priority is implemented as an interface configuration command, but any changes will apply to the all interfaces on the switch.

Mapping CoS Values to ACLs

Use the ACL CoS Mapping page to set the output queue for packets matching an ACL rule as shown in the following table. Note that the specified CoS value is only used to map the matching packet to an output queue; it is not written to the packet itself. For information on mapping the CoS values to output queues, see page 3-135.

Table 3-12 Mapping CoS Values to IP ACLs

Priority	0	1	2	3	4	5	6	7
Queue	1	2	0	3	4	5	6	7

Command Usage

You must configure an ACL mask before you can map CoS values to the rule.

Command Attributes

- **Port** – Port identifier.
- **Name²⁰** – Name of ACL.
- **Type** – Type of ACL (IP or MAC).
- **CoS Priority** – CoS value used for packets matching an IP ACL rule. (Range: 0-7)

20. For information on configuring ACLs, see page 3-66.

Web – Click Priority, ACL CoS Priority. Select a port, select an ACL rule, specify a CoS priority, then click Add.

ACL CoS Priority

ACL CoS Priority Configure

Port	Name,Type	CoS Priority (0-7)	
1	bill,IP	<input type="text"/>	Add

ACL CoS Priority Mapping

Port	Name	Type	CoS Priority	
1	bill	IP	0	Remove

Figure 3-86 ACL CoS Priority

CLI – This example assigns a CoS value of zero to packets matching rules within the specified ACL on port 1.

```

Console(config)#interface ethernet 1/1                               4-149
Console(config-if)#map access-list ip bill cos 0                    4-99
Console(config-if)#
  
```

Changing Priorities Based on ACL Rules

You can change traffic priorities for frames matching the defined ACL rule. (This feature is commonly referred to as ACL packet marking.) This switch can change the IEEE 802.1p priority, IP Precedence, or DSCP Priority of IP frames; or change the IEEE 802.1p priority of Layer 2 frames.

Command Usage

- You must configure an ACL mask before you can change priorities based on a rule.
- Traffic priorities may be included in the IEEE 802.1p priority tag. This tag is also incorporated as part of the overall IEEE 802.1Q VLAN tag. The 802.1p priority may be set for either Layer 2 or IP frames.
- The IP frame header also includes priority bits in the Type of Service (ToS) octet. The Type of Service octet may contain three bits for IP Precedence or six bits for Differentiated Services Code Point (DSCP) service. Note that the IP frame header can include either the IP Precedence or DSCP priority type.
- The precedence for priority mapping by this switch is IP Precedence or DSCP Priority, and then 802.1p priority.

3 Configuring the Switch

Command Attributes

- **Port** – Port identifier.
- **Name**²¹ – Name of ACL.
- **Type** – Type of ACL (IP or MAC).
- **Precedence** – IP Precedence value. (Range: 0-7)
- **DSCP** – Differentiated Services Code Point value. (Range: 0-63)
- **802.1p Priority** – Class of Service value in the IEEE 802.1p priority tag. (Range: 0-7; 7 is the highest priority)

Web – Click Priority, ACL Marker. Select a port and an ACL rule. To specify a ToS priority, mark the Precedence/DSCP check box, select Precedence or DSCP from the scroll-down box, and enter a priority. To specify an 802.1p priority, mark the 802.1p Priority check box, and enter a priority. Then click Add.

ACL Marker

ACL Marker Configure

Port	Name,Type	Precedence (0-7) /DSCP (0-63)	802.1p Priority (0-7)	
1	bill,IP	<input type="checkbox"/> Precedence	<input type="checkbox"/>	Add

ACL Marker Mapping

Port	Name	Type	Precedence/DSCP	802.1p Priority	
1	bill	IP	DSCP	0	<input type="checkbox"/> Remove
1	mike	MAC		0	<input type="checkbox"/> Remove

Figure 3-87 ACL Marker

CLI – This example changes the DSCP priority for packets matching an IP ACL rule, and the 802.1p priority for packets matching a MAC ACL rule.

```
Console(config)#interface ethernet 1/1 4-149
Console(config-if)#match access-list ip bill set dscp 0 4-100
Console(config-if)#match access-list mac mike set priority 0 4-111
Console(config-if)#end
Console#show marking 4-101
Interface ethernet 1/1
 match access-list IP bill set DSCP 0
 match access-list MAC a set priority 0
Console#
```

21. For information on configuring ACLs, see page 3-66.

Multicast Filtering

Multicasting is used to support real-time applications such as videoconferencing or streaming audio. A multicast server does not have to establish a separate connection with each client. It merely broadcasts its service to the network, and any hosts that want to receive the multicast register with their local multicast switch/router. Although this approach reduces the network overhead required by a multicast server, the broadcast traffic must be carefully pruned at every multicast switch/router it passes through to ensure that traffic is only passed on to the hosts which subscribed to this service.

This switch uses IGMP (Internet Group Management Protocol) to query for any attached hosts that want to receive a specific multicast service. It identifies the ports containing hosts requesting to join the service and sends data out to those ports only. It then propagates the service request up to any neighboring multicast switch/router to ensure that it will continue to receive the multicast service. This procedure is called multicast filtering.


The purpose of IP multicast filtering is to optimize a switched network's performance, so multicast packets will only be forwarded to those ports containing multicast group hosts or multicast routers/switches, instead of flooding traffic to all ports in the subnet (VLAN).

This switch not only supports IP multicast filtering by passively monitoring IGMP query and report messages and multicast routing probe messages to register end-stations as multicast group members, but also supports the DVMRP and PIM-DM multicast routing protocols required to forward multicast traffic to other subnets (page 3-242 and 3-249).

IGMP Protocol

The Internet Group Management Protocol (IGMP) runs between hosts and their immediately adjacent multicast router/switch. IGMP is a multicast host registration protocol that allows any host to inform its local router that it wants to receive transmissions addressed to a specific multicast group.


A router, or multicast-enabled switch, can periodically ask their hosts if they want to receive multicast traffic. If there is more than one router/switch on the LAN performing IP multicasting, one of these devices is elected "querier" and assumes the role of querying the LAN for group members. It then propagates the service requests on to any adjacent multicast switch/router to ensure that it will continue to receive the multicast service.

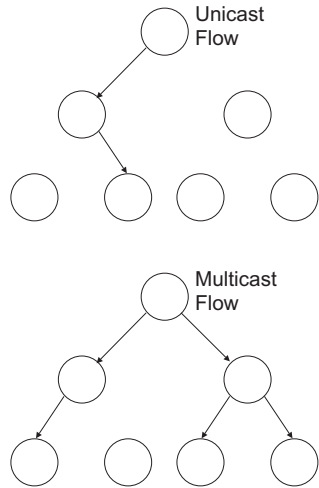

3 Configuring the Switch

Based on the group membership information learned from IGMP, a router/switch can determine which (if any) multicast traffic needs to be forwarded to each of its ports. At Layer 3, multicast routers use this information, along with a multicast routing protocol such as DVMRP or PIM, to support IP multicasting across the Internet.

Note that IGMP neither alters nor routes IP multicast packets. A multicast routing protocol must be used to deliver IP multicast packets across different subnetworks. Therefore, when DVMRP or PIM routing is enabled for a subnet on this switch, you also need to enable IGMP.

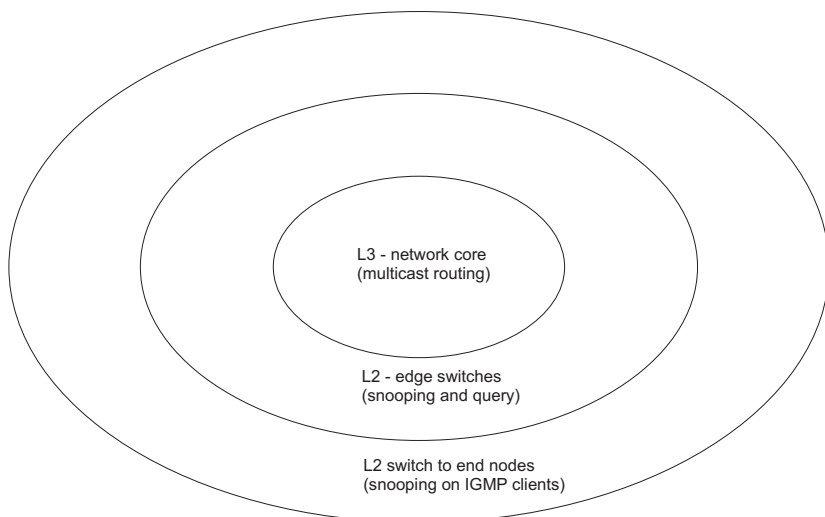

Layer 2 IGMP (Snooping and Query)

IGMP Snooping and Query – If multicast routing is not supported on other switches in your network, you can use IGMP Snooping and IGMP Query (page 3-149) to monitor IGMP service requests passing between multicast clients and servers, and dynamically configure the switch ports which need to forward multicast traffic.

Static IGMP Router Interface – If IGMP snooping cannot locate the IGMP querier, you can manually designate a known IGMP querier (i.e., a multicast router/switch) connected over the network to an interface on your switch (page 3-152). This interface will then join all the current multicast groups supported by the attached router/switch to ensure that multicast traffic is passed to all appropriate interfaces within the switch.

Static IGMP Host Interface – For multicast applications that you need to control more carefully, you can manually assign a multicast service to specific interfaces on the switch (page 3-154).

IGMP Query (Layer 2 or 3) – IGMP Query can only be enabled globally at Layer 2, but can be enabled for individual VLAN interfaces at Layer 3 (page 3-154). However, note that Layer 2 query is disabled if Layer 3 query is enabled.

Configuring IGMP Snooping and Query Parameters

You can configure the switch to forward multicast traffic intelligently. Based on the IGMP query and report messages, the switch forwards traffic only to the ports that request multicast traffic. This prevents the switch from broadcasting the traffic to all ports and possibly disrupting network performance.

Command Usage

- **IGMP Snooping** – This switch can passively snoop on IGMP Query and Report packets transferred between IP multicast routers/switches and IP multicast host groups to identify the IP multicast group members. It simply monitors the IGMP packets passing through it, picks out the group registration information, and configures the multicast filters accordingly.
- **IGMP Querier** – A router, or multicast-enabled switch, can periodically ask their hosts if they want to receive multicast traffic. If there is more than one router/switch on the LAN performing IP multicasting, one of these devices is elected “querier” and assumes the role of querying the LAN for group members. It then propagates the service requests on to any upstream multicast switch/router to ensure that it will continue to receive the multicast service.

Note: Multicast routers use this information, along with a multicast routing protocol such as DVMRP or PIM, to support IP multicasting across the Internet.

Command Attributes

- **IGMP Status** — When enabled, the switch will monitor network traffic to determine which hosts want to receive multicast traffic. This is also referred to as IGMP Snooping. (Default: Enabled)
- **Act as IGMP Querier** — When enabled, the switch can serve as the Querier, which is responsible for asking hosts if they want to receive multicast traffic. (Default: Disabled)
- **IGMP Query Count** — Sets the maximum number of queries issued for which there has been no response before the switch takes action to drop a client from the multicast group. (Range: 2-10, Default: 2)
- **IGMP Query Interval** — Sets the frequency at which the switch sends IGMP host-query messages. (Range: 60-125 seconds, Default: 125)
- **IGMP Report Delay** — Sets the time between receiving an IGMP Report for an IP multicast address on a port before the switch sends an IGMP Query out of that port and removes the entry from its list. (Range: 5-25 seconds, Default: 10)
- **IGMP Query Timeout** — The time the switch waits after the previous querier stops before it considers the router port (i.e., the interface which had been receiving query packets) to have expired. (Range: 300-500 seconds, Default: 300)
- **IGMP Version** — Sets the protocol version for compatibility with other devices on the network. (Range: 1-2; Default: 2)

Notes:

1. All systems on the subnet must support the same version.
2. Some attributes are only enabled for IGMPv2, including IGMP Report Delay and IGMP Query Timeout.

3 Configuring the Switch

Web – Click IGMP Snooping, IGMP Configuration. Adjust the IGMP settings as required, and then click Apply. (The default settings are shown below.)

IGMP Configuration	
IGMP Status	<input checked="" type="checkbox"/> Enabled
Act as IGMP Querier	<input type="checkbox"/> Enabled
IGMP Query Count (2-10)	<input type="text" value="2"/>
IGMP Query Interval (60-125)	<input type="text" value="125"/> seconds
IGMP Report Delay (5-25)	<input type="text" value="10"/> seconds
IGMP Query Timeout (300-500)	<input type="text" value="300"/> seconds
IGMP Version (1,2)	<input type="text" value="2"/>

Figure 3-88 IGMP Configuration

CLI – This example modifies the settings for multicast filtering, and then displays the current status.

```
Console(config)#ip igmp snooping 4-221
Console(config)#ip igmp snooping querier 4-224
Console(config)#ip igmp snooping query-count 10 4-224
Console(config)#ip igmp snooping query-interval 100 4-225
Console(config)#ip igmp snooping query-max-response-time 20 4-226
Console(config)#ip igmp snooping query-time-out 300 4-226
Console(config)#ip igmp snooping version 2 4-222
Console(config)#exit
Console#show ip igmp snooping 4-222
Service status : Enabled
Querier status : Enabled
Query count : 10
Query interval : 100 sec
Query max response time : 20 sec
Router port expire time: 300 sec
IGMP snooping version : Version 2
Console#
```

Displaying Interfaces Attached to a Multicast Router

Multicast routers that are attached to ports on the switch use information obtained from IGMP, along with a multicast routing protocol such as DVMRP or PIM, to support IP multicasting across the Internet. These routers may be dynamically discovered by the switch or statically assigned to an interface on the switch.

You can use the Multicast Router Port Information page to display the ports on this switch attached to a neighboring multicast router/switch for each VLAN ID.

Command Attributes

- **VLAN ID** – ID of configured VLAN (1-4094).
- **Multicast Router List** – Multicast routers dynamically discovered by this switch or those that are statically assigned to an interface on this switch.

Web – Click IGMP Snooping, Multicast Router Port Information. Select the required VLAN ID from the scroll-down list to display the associated multicast routers.

Multicast Router Port Information

VLAN ID: 1

Multicast Router List:

Unit1 Port11, Static

Figure 3-89 Multicast Router Port Information

CLI – This example shows that Port 11 has been statically configured as a port attached to a multicast router.

```
Console#show ip igmp snooping mrouter vlan 1 4-228
VLAN M'cast Router Port Type
-----
1           Eth 1/11 Static
Console#
```

3 Configuring the Switch

Specifying Static Interfaces for a Multicast Router

Depending on your network connections, IGMP snooping may not always be able to locate the IGMP querier. Therefore, if the IGMP querier is a known multicast router/switch connected over the network to an interface (port or trunk) on your switch, you can manually configure the interface (and a specified VLAN) to join all the current multicast groups supported by the attached router. This can ensure that multicast traffic is passed to all the appropriate interfaces within the switch.

Command Attributes

- **Interface** – Activates the Port or Trunk scroll down list.
- **VLAN ID** – Selects the VLAN to propagate all multicast traffic coming from the attached multicast router.
- **Port or Trunk** – Specifies the interface attached to a multicast router.

Web – Click IGMP Snooping, Static Multicast Router Port Configuration. Specify the interfaces attached to a multicast router, indicate the VLAN which will forward all the corresponding multicast traffic, and then click Add. After you have finished adding interfaces to the list, click Apply.

Figure 3-90 Static Multicast Router Port Configuration

CLI – This example configures port 11 as a multicast router port within VLAN 1.

```
Console(config)#ip igmp snooping vlan 1 mrouter ethernet 1/11      4-227
Console(config)#exit
Console#show ip igmp snooping mrouter vlan 1                       4-228
  VLAN M'cast Router Port Type
  -----
    1           Eth 1/11  Static
Console#
```

Displaying Port Members of Multicast Services

You can display the port members associated with a specified VLAN and multicast service.

Command Attribute

- **VLAN ID** – Selects the VLAN for which to display port members.
- **Multicast IP Address** – The IP address for a specific multicast service.
- **Multicast Group Port List** – Shows the interfaces that have already been assigned to the selected VLAN to propagate a specific multicast service.

Web – Click IGMP Snooping, IP Multicast Registration Table. Select a VLAN ID and the IP address for a multicast service from the scroll-down lists. The switch will display all the interfaces that are propagating this multicast service.

IP Multicast Registration Table

VLAN ID:

Multicast IP Address:

Multicast Group Port List:

Unit1 Port1, User

Figure 3-91 IP Multicast Registration Table

CLI – This example displays all the known multicast services supported on VLAN 1, along with the ports propagating the corresponding services. The Type field shows if this entry was learned dynamically or was statically configured.

```

Console#show bridge 1 multicast vlan 1
VLAN M'cast IP addr. Member ports Type
-----
  1      224.1.1.12      Eth1/12      USER
  1      224.1.1.2.3      Eth1/12      IGMP
Console#
  
```

3 Configuring the Switch

Assigning Ports to Multicast Services

Multicast filtering can be dynamically configured using IGMP Snooping and IGMP Query messages as described in “Configuring IGMP Snooping and Query Parameters” on page 3-149. For certain applications that require tighter control, you may need to statically configure a multicast service on the switch. First add all the ports attached to participating hosts to a common VLAN, and then assign the multicast service to that VLAN group.

Command Usage

- Static multicast addresses are never aged out.
- When a multicast address is assigned to an interface in a specific VLAN, the corresponding traffic can only be forwarded to ports within that VLAN.

Command Attribute

- **Interface** – Activates the Port or Trunk scroll down list.
- **VLAN ID** – Selects the VLAN to propagate all multicast traffic coming from the attached multicast router/switch.
- **Multicast IP** – The IP address for a specific multicast service
- **Port or Trunk** – Specifies the interface attached to a multicast router/switch.

Web – Click IGMP Snooping, IGMP Member Port Table. Specify the interface attached to a multicast service (via an IGMP-enabled switch or multicast router), indicate the VLAN that will propagate the multicast service, specify the multicast IP address, and click Add. After you have completed adding ports to the member list, click Apply.

IGMP Member Port Table

IGMP Member Port List:

VLAN 1, 224.1.1.12, Unit 1, Port 1

<<Add Remove

New Static IGMP Member Port:

Interface	Port
VLAN ID	1
Multicast IP	
Port	1
Trunk	

Figure 3-92 IGMP Member Port Table

CLI – This example assigns a multicast address to VLAN 1, and then displays all the known multicast services supported on VLAN 1.


```
Console(config)#ip igmp snooping vlan 1 static 224.1.1.12          4-221
 ethernet 1/12
Console(config)#exit
Console#show mac-address-table multicast vlan 1                    4-223
VLAN M'cast IP addr. Member ports Type
-----
 1          224.1.1.12      Eth1/12  USER
 1          224.1.2.3       Eth1/12  IGMP
Console#
```


Layer 3 IGMP (Query used with Multicast Routing)

IGMP Snooping – IGMP Snooping is a Layer 2 function (page 3-149) that can be used to provide multicast filtering when no other switches in the network support multicast routing. (Note that IGMP Snooping can only be globally enabled.)

IGMP Query – Multicast query is used to poll each known multicast group for active members, and dynamically configure the switch ports which need to forward multicast traffic. Although the implementation differs slightly, IGMP Query is used in conjunction with both Layer 2 IGMP Snooping and multicast routing. Note that when using IGMP Snooping, multicast query is automatically enabled. (See “Configuring IGMP Snooping and Query Parameters” on page 3-149.)

Layer 3 IGMP – This protocol includes a form of multicast query specifically designed to work with multicast routing. A router periodically asks its hosts if they want to receive multicast traffic. It then propagates service requests on to any upstream multicast router to ensure that it will continue to receive the multicast service. Layer 3 IGMP can be enabled for individual VLAN interfaces (page 3-154). (Note that Layer 2 snooping and query is disabled if Layer 3 IGMP is enabled.)



Configuring IGMP Interface Parameters

This switch uses IGMP (Internet Group Management Protocol) to query for any attached hosts that want to receive a specific multicast service. The hosts may respond with several types of IP multicast messages. Hosts respond to queries with report messages that indicate which groups they want to join or the groups to which they already belong. If a router does not receive a report message within a specified period of time, it will prune that interface from the multicast tree. A host can also submit a join message at any time without waiting for a query from the router. Host can also signal when they no longer want to receive traffic for a specific group by sending a leave-group message.

These IGMP messages are used by the router to identify ports containing multicast hosts and to restrict the downstream flow of multicast data to only these ports. If more than one router on the LAN is performing IP multicasting, one of these is elected as the “querier” and assumes the role of querying for group members. It then propagates the service request up to any neighboring multicast router to ensure that it will continue to receive the multicast service. The following parameters are used to control Layer 3 IGMP and query functions.

Command Attributes

- **VLAN** (Interface) – VLAN interface bound to a primary IP address.
(Range: 1-4094)
- **IGMP Protocol Status** (Admin Status) – Enables IGMP on a VLAN interface.
(Default: Disabled)

3 Configuring the Switch

- **Last Member Query Interval** – A multicast client sends an IGMP leave message when it leaves a group. The router then checks to see if this was the last host in the group by sending an IGMP query and starting a timer based on this command. If no reports are received before the timer expires, the group is deleted. (Range: 0-25 seconds; Default: 1 second)
 - This value may be tuned to modify the leave latency of the network. A reduced value results in reduced time to detect the loss of the last member of a group.
- **Max Query Response Time** – Configures the maximum response time advertised in IGMP queries. (Range: 0-25 seconds; Default: 10 seconds)
 - The switch must be using IGMPv2 for this command to take effect.
 - This command defines how long any responder (i.e., client or router) still in the group has to respond to a query message before the router deletes the group.
 - By varying the Maximum Query Response Time, you can tune the burstiness of IGMP messages passed on the subnet; where larger values make the traffic less bursty, as host responses are spread out over a larger interval.
 - The number of seconds represented by the maximum response interval must be less than the Query Interval.
- **Query Interval** – Configures the frequency at which host query messages are sent. (Range: 1-255; Default: 125 seconds)
 - Multicast routers send host query messages to determine the interfaces that are connected to downstream hosts requesting a specific multicast service. Only the designated multicast router for a subnet sends host query messages, which are addressed to the multicast address 224.0.0.1.
 - For IGMP Version 1, the designated router is elected according to the multicast routing protocol that runs on the LAN. But for IGMP Version 2, the designated querier is the lowest IP-addressed multicast router on the subnet.
- **Robustness Variable** – Specifies the robustness (i.e., expected packet loss) for this interface. The robustness value is used in calculating the appropriate range for other IGMP variables, such as the Group Membership Interval (**Last Member Query Interval**), as well as the Other Querier Present Interval, and the Startup Query Count (RFC 2236). (Range: 1-255; Default: 2)
- **Version** – Configures the IGMP version used on an interface. (Options: Version 1 or 2; Default: Version 2)
 - All routers on the subnet must support the same version. However, the multicast hosts on the subnet may support either IGMP version 1 or 2.
 - The switch must be set to version 2 to enable the **Max Query Response Time**.
- **Querier** – Device currently serving as the IGMP querier for this multicast service.

Web – Click IP, IGMP, Interface Settings. Specify each interface that will support IGMP (Layer 3), specify the IGMP parameters for each interface, then click Apply.

IGMP Interface Information

Interface	Admin Status	Version	Robustness Variable	Query Interval	Max Query Response Time	Last Member Query Interval	Querier	Configure
VLAN2	Enabled	2	2	125	10	1	10.1.0.253	Configure
VLAN3	Enabled	2	2	125	10	1	10.1.5.253	Configure

Entry Count: 2

IGMP Interface Settings

VLAN : <input type="text" value="2"/>			
IGMP Protocol Status	<input type="text" value="Enabled"/>	Query Interval (seconds)	<input type="text" value="125"/>
Last Member Query Interval (0 - 25 seconds)	<input type="text" value="1"/>	Robustness Variable (1 - 255)	<input type="text" value="2"/>
Max Query Response Time (0 - 25 seconds)	<input type="text" value="10"/>	Version	<input type="text" value="2"/>

Figure 3-93 IGMP Interface Settings

CLI – This example configures the IGMP parameters for VLAN 1.

```

Console(config)#interface vlan 1                               4-191
Console(config-if)#ip igmp                                    4-229
Console(config-if)#ip igmp last-memb-query-interval 10       4-232
Console(config-if)#ip igmp max-resp-interval 20              4-231
Console(config-if)#ip igmp query-interval 100                4-231
Console(config-if)#ip igmp robustval 3                       4-230
Console(config-if)#ip igmp version 1                         4-232
Console(config-if)#end
Console#show ip igmp interface vlan 1                         4-233
Vlan 1 is up
  IGMP is enable, version is 2
  Robustness variable is 2
  Query interval is 125 sec
  Query Max Response Time is 10 sec, Last Member Query Interval is 1 sec
  Querier is 10.1.0.253
Console#

```

3 Configuring the Switch

Displaying Multicast Group Information

When IGMP (Layer 3) is enabled on this switch the current multicast groups learned via IGMP can be displayed in the IP/IGMP/Group Information page. When IGMP (Layer 3) is disabled and IGMP (Layer 2) is enabled, you can view the active multicast groups in the IGMP Snooping/IP Multicast Registration Table (see page 3-153).

Command Attributes

- **Group Address** – IP multicast group address with subscribers directly attached or downstream from this switch.
- **Interface** – The interface on this switch that has received traffic directed to the multicast group address.
- **Last Reporter** – The IP address of the source of the last membership report received for this multicast group address on this interface. If no membership report has been received, this object has the value 0.0.0.0.
- **Up time** – The time elapsed since this entry was created.
- **Expire** – The time remaining before this entry will be aged out. (Default: 260 seconds)
- **V1 Timer** – The time remaining until the switch assumes that there are no longer any IGMP Version 1 members on the IP subnet attached to this interface. (Default: 400 seconds)
 - If the switch receives an IGMP Version 1 Membership Report, it sets a timer to note that there are Version 1 hosts present which are members of the group for which it heard the report.
 - If there are Version 1 hosts present for a particular group, the switch will ignore any Leave Group messages that it receives for that group.

Web – Click IP, IGMP, IGMP Group Membership.

IGMP Group Membership					
Group Address	Interface	Last Reporter	Up time	Expire	V1 Timer
234.5.6.7	VLAN2	10.1.0.19	6077	209	0
234.5.6.8	VLAN3	10.1.5.19	6067	226	0

Entry Count: 2

Figure 3-94 IGMP Group Membership

CLI – The following shows the IGMP groups currently active on VLAN 1.

```
Console#show ip igmp groups vlan 1 4-234
```

GroupAddress	InterfaceVlan	Lastreporter	Uptime	Expire	V1Timer
234.5.6.8	1	10.1.5.19	7068	220	0

```
Console#
```

Configuring Domain Name Service

The Domain Naming System (DNS) service on this switch allows host names to be mapped to IP addresses using static table entries or by redirection to other name servers on the network. When a client device designates this switch as a DNS server, the client will attempt to resolve host names into IP addresses by forwarding DNS queries to the switch, and waiting for a response.

You can manually configure entries in the DNS table used for mapping domain names to IP addresses, configure default domain names, or specify one or more name servers to use for domain name to address translation.

Configuring General DNS Server Parameters

Command Usage

- To enable DNS service on this switch, first configure one or more name servers, and then enable domain lookup status.
- To append domain names to incomplete host names received from a DNS client (i.e., not formatted with dotted notation), you can specify a default domain name or a list of domain names to be tried in sequential order.
- If there is no domain list, the default domain name is used. If there is a domain list, the default domain name is not used.
- When an incomplete host name is received by the DNS server on this switch and a domain name list has been specified, the switch will work through the domain list, appending each domain name in the list to the host name, and checking with the specified name servers for a match.
- When more than one name server is specified, the servers are queried in the specified sequence until a response is received, or the end of the list is reached with no response.
- Note that if all name servers are deleted, DNS will automatically be disabled.

Command Attributes

- **Domain Lookup Status** – Enables DNS host name-to-address translation.
- **Default Domain Name**²² – Defines the default domain name appended to incomplete host names. (Range: 1-64 alphanumeric characters)
- **Domain Name List**²² – Defines a list of domain names that can be appended to incomplete host names. (Range: 1-64 alphanumeric characters. 1-5 names)
- **Name Server List** – Specifies the address of one or more domain name servers to use for name-to-address resolution. (Range: 1-6 IP addresses)

22. Do not include the initial dot that separates the host name from the domain name.

3 Configuring the Switch

Web – Select DNS, General Configuration. Set the default domain name or list of domain names, specify one or more name servers to use to use for address resolution, enable domain lookup status, and click Apply.

General Configuration

Domain Lookup Status: Enable

Default Domain Name:

Domain Name List:

Current:

New:

<< Add Remove

Name Server List:

Current:

New:

<< Add Remove

Figure 3-95 DNS General Configuration

CLI - This example sets a default domain name and a domain list. However, remember that if a domain list is specified, the default domain name is not used.

```
Console(config)#ip domain-name sample.com 4-142
Console(config)#ip domain-list sample.com.uk 4-143
Console(config)#ip domain-list sample.com.jp
Console(config)#ip domain-server 192.168.1.55 10.1.0.55 4-144
Console(config)#ip domain-lookup 4-145
Console#show dns 4-147
Domain Lookup Status:
  DNS enabled
Default Domain Name:
  .sample.com
Domain Name List:
  .sample.com.uk
  .sample.com.jp
Name Server List:
  192.168.1.55
  10.1.0.55
Console#
```

Configuring Static DNS Host to Address Entries

You can manually configure static entries in the DNS table that are used to map domain names to IP addresses.

Command Usage

- Static entries may be used for local devices connected directly to the attached network, or for commonly used resources located elsewhere on the network.
- Servers or other network devices may support one or more connections via multiple IP addresses. If more than one IP address is associated with a host name in the static table or via information returned from a name server, a DNS client can try each address in succession, until it establishes a connection with the target device.

Field Attributes

- **Host Name** – Name of a host device that is mapped to one or more IP addresses. (Range: 1-64 characters)
- **IP Address** – Internet address(es) associated with a host name. (Range: 1-8 addresses)
- **Alias** – Displays the host names that are mapped to the same address(es) as a previously configured entry.

3 Configuring the Switch

Web – Select DNS, Static Host Table. Enter a host name and one or more corresponding addresses, then click Apply.

Host Name	IP Address	Alias		
rd5	10.1.0.55	rd6	Delete	Edit
	192.168.1.55			

Clear

Add Static Host:

Host Name	<input type="text"/>
IP Address 1	<input type="text"/>
IP Address 2	<input type="text"/>
IP Address 3	<input type="text"/>
IP Address 4	<input type="text"/>
IP Address 5	<input type="text"/>
IP Address 6	<input type="text"/>
IP Address 7	<input type="text"/>
IP Address 8	<input type="text"/>

Add

Figure 3-96 DNS Static Host Table

CLI - This example maps two address to a host name, and then configures an alias host name for the same addresses.

```
Console(config)#ip host rd5 192.168.1.55 10.1.0.55      4-141
Console(config)#ip host rd6 10.1.0.55
Console#show host                                       4-146

Hostname
 rd5
Inet address
 10.1.0.55 192.168.1.55
Alias
 1.rd6
```



Displaying the DNS Cache

You can display entries in the DNS cache that have been learned via the designated name servers.

Field Attributes

- **No** – The entry number for each resource record.
- **Flag** – The flag is always “4” indicating a cache entry and therefore unreliable.
- **Type** – This field includes CNAME which specifies the canonical or primary name for the owner, and ALIAS which specifies multiple domain names which are mapped to the same IP address as an existing entry.
- **IP** – The IP address associated with this record.
- **TTL** – The time to live reported by the name server.
- **Domain** – The domain name associated with this record.

Web – Select DNS, Cache.

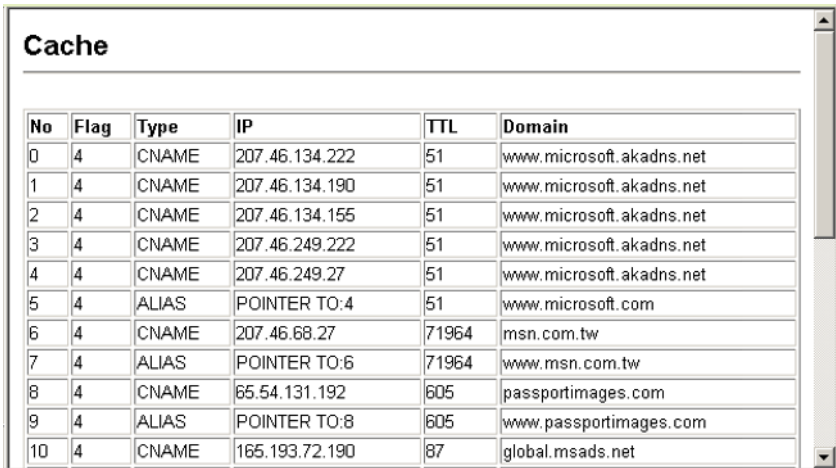

The screenshot shows a window titled "Cache" containing a table with the following data:

No	Flag	Type	IP	TTL	Domain
0	4	CNAME	207.46.134.222	51	www.microsoft.akadns.net
1	4	CNAME	207.46.134.190	51	www.microsoft.akadns.net
2	4	CNAME	207.46.134.155	51	www.microsoft.akadns.net
3	4	CNAME	207.46.249.222	51	www.microsoft.akadns.net
4	4	CNAME	207.46.249.27	51	www.microsoft.akadns.net
5	4	ALIAS	POINTER TO:4	51	www.microsoft.com
6	4	CNAME	207.46.68.27	71964	msn.com.tw
7	4	ALIAS	POINTER TO:6	71964	www.msn.com.tw
8	4	CNAME	65.54.131.192	605	passportimages.com
9	4	ALIAS	POINTER TO:8	605	www.passportimages.com
10	4	CNAME	165.193.72.190	87	global.msads.net

Figure 3-97 DNS Cache

3 Configuring the Switch

CLI - This example displays all the resource records learned from the designated name servers.

```
Console#show dns cache 4-147
```

NO	FLAG	TYPE	IP	TTL	DOMAIN
0	4	CNAME	207.46.134.222	51	www.microsoft.akadns.net
1	4	CNAME	207.46.134.190	51	www.microsoft.akadns.net
2	4	CNAME	207.46.134.155	51	www.microsoft.akadns.net
3	4	CNAME	207.46.249.222	51	www.microsoft.akadns.net
4	4	CNAME	207.46.249.27	51	www.microsoft.akadns.net
5	4	ALIAS	POINTER TO:4	51	www.microsoft.com
6	4	CNAME	207.46.68.27	71964	msn.com.tw
7	4	ALIAS	POINTER TO:6	71964	www.msn.com.tw
8	4	CNAME	65.54.131.192	605	passportimages.com
9	4	ALIAS	POINTER TO:8	605	www.passportimages.com
10	4	CNAME	165.193.72.190	87	global.msads.net

```
Console#
```

Dynamic Host Configuration Protocol


Dynamic Host Configuration Protocol (DHCP) can dynamically allocate an IP address and other configuration information to network clients when they boot up. If a subnet does not already include a BOOTP or DHCP server, you can relay DHCP client requests to a DHCP server on another subnet, or configure the DHCP server on this switch to support that subnet.

When configuring the DHCP server on this switch, you can configure an address pool for each unique IP interface, or manually assign a static IP address to clients based on their hardware address or client identifier. The DHCP server can provide the host's IP address, domain name, gateway router and DNS server, information about the host's boot image including the TFTP server to access for download and the name of the boot file, or boot information for NetBIOS Windows Internet Naming Service (WINS).

Configuring DHCP Relay Service

This switch supports DHCP relay service for attached host devices. If DHCP relay is enabled, and this switch sees a DHCP request broadcast, it inserts its own IP address into the request so that the DHCP server will know the subnet where the client is located.

Then, the switch forwards the packet to the DHCP server. When the server receives the DHCP request, it allocates a free IP address for the DHCP client from its defined scope for the DHCP client's subnet, and sends a DHCP response back to the DHCP relay agent (i.e., this switch). This switch then broadcasts the DHCP response received from the server to the client.

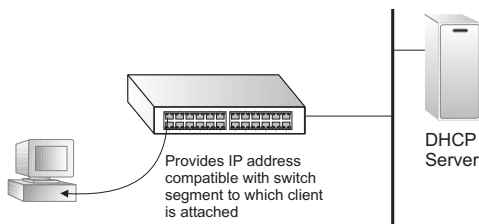

Command Usage

You must specify the IP address for at least one DHCP server. Otherwise, the switch's DHCP relay agent will not forward client requests to a DHCP server.

Command Attributes

- **VLAN ID** – ID of configured VLAN.
- **VLAN Name** – Name of the VLAN.
- **Server IP Address** – Addresses of DHCP servers to be used by the switch's DHCP relay agent in order of preference.
- **Restart DHCP Relay** – Use this button to enable or re-initialize DHCP relay service.

Web – Click DHCP, Relay Configuration. Enter up to five IP addresses for any VLAN, then click Restart DHCP Relay to start the relay service.

VLAN ID	VLAN Name	Server IP Address			
1	DefaultVlan	10.1.0.99	0.0.0.0	0.0.0.0	0.0.0.0
		0.0.0.0			

Restart DHCP Relay

Figure 3-98 DHCP Relay Configuration

CLI – This example specifies one DHCP relay server for VLAN 1, and enables the relay service.

```


Console(config)#interface vlan 1                               4-149
Console(config-if)#dhcp relay server 10.1.0.99                4-129
Console(config-if)#ip dhcp relay                              4-128
Console(config-if)#

```

Configuring the DHCP Server

This switch includes a Dynamic Host Configuration Protocol (DHCP) server that can assign temporary IP addresses to any attached host requesting service. It can also provide other network settings such as the domain name, default gateway, Domain Name Servers (DNS), Windows Internet Naming Service (WINS) name servers, or information on the bootup file for the host device to download.

Addresses can be assigned to clients from a common address pool configured for a specific IP interface on this switch, or fixed addresses can be assigned to hosts based on the client identifier code or MAC address.

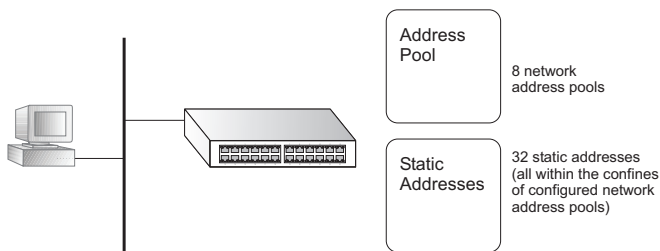

Command Usage

- First configure any excluded addresses, including the address for this switch.
- Then configure address pools for the network interfaces. You can configure up to 8 network address pools. You can also manually bind an address to a specific client if required. However, any fixed addresses must fall within the range of an existing network address pool. You can configure up to 32 fixed host addresses (i.e., entering one address per pool).
- If the DHCP server is running, you must disable it and then reenabling it to implement any configuration changes. This can be done on the DHCP, Server, General page.

Enabling the Server, Setting Excluded Addresses

Enable the DHCP Server and specify the IP addresses that it should not be assigned to clients.

Command Attributes

- **DHCP Server** – Enables or disables the DHCP server on this switch. (Default: Disabled)
- **Excluded Addresses** – Specifies IP addresses that the DHCP server should not assign to DHCP clients. You can specify a single address or an address range.
- **New (Excluded Addresses)** – New entries for excluded addresses can be specified as a single address or an address range.

Note: Be sure you exclude the address for this switch and other key network devices.

Web – Click DHCP, Server, General. Enter a single address or an address range, and click Add.

General

Note: If the DHCP server is running, you must disable it and then reenable it to implement any configuration changes.

DHCP Server: Enabled (Restart)

Excluding Address:

10.1.0.250 ~ 10.1.0.254

New:

Low:	
High:	

Entry Count: 1

Figure 3-99 DHCP Server General Configuration

CLI – This example enables the DHCP and sets an excluded address range.

```

Console(config)#service dhcp                                4-130
Console(config)#ip dhcp excluded-address 10.1.0.250 10.1.0.254 4-131
Console#

```

Configuring Address Pools

You must configure IP address pools for each IP interface that will provide addresses to attached clients via the DHCP server.

Command Usage

- First configure address pools for the network interfaces. Then you can manually bind an address to a specific client if required. However, note that any static host address must fall within the range of an existing network address pool. You can configure up to 8 network address pools, and up to 32 manually bound host address pools (i.e., one address per host pool).
- When a client request is received, the switch first checks for a network address pool matching the gateway where the request originated (i.e., if the request was forwarded by a relay server). If there is no gateway in the client request (i.e., the request was not forwarded by a relay server), the switch searches for a network pool matching the interface through which the client request was received. It then searches for a manually configured host address that falls within the matching network pool. If no manually configured host address is found, it assigns an address from the matching network address pool. However, if no matching address pool is found the request is ignored.
- When searching for a manual binding, the switch compares the client identifier and then the hardware address for DHCP clients. Since BOOTP clients cannot transmit a client identifier, you must configure a hardware address for this host type. If no manual binding has been specified for a host entry with a hardware address or client identifier, the switch will assign an address from the first matching network pool.
- If the subnet mask is not specified for network or host address pools, the class A, B, or C natural mask is used (see page 3-205). The DHCP server assumes that all host addresses are available. You can exclude subsets of the address space by using the IP Excluded Address field on the DHCP Server General configuration page.

Command Attributes

Creating a New Address Pool

- **Pool Name** – A string or integer. (Range: 1-8 characters)

Setting the Network Parameters

- **IP** – The IP address of the DHCP address pool.
- **Subnet Mask** – The bit combination that identifies the network (or subnet) and the host portion of the DHCP address pool.

Setting the Host Parameters

- **IP** – The IP address of the DHCP address pool.
- **Subnet Mask** – Specifies the network mask of the client.
- **Hardware Address** – Specifies the MAC address and protocol used on the client. (Options: Ethernet, IEEE802, FDDI; Default: Ethernet)

- **Client-Identifier** – A unique designation for the client device, either a text string (1-15 characters) or hexadecimal value.

Setting the Optional Parameters

- **Default Router** – The IP address of the primary and alternate gateway router. The IP address of the router should be on the same subnet as the client.
- **DNS Server** – The IP address of the primary and alternate DNS server. DNS servers must be configured for a DHCP client to map host names to IP addresses.
- **Netbios Server** – IP address of the primary and alternate NetBIOS Windows Internet Naming Service (WINS) name server used for Microsoft DHCP clients.
- **Netbios Type** – NetBIOS node type for Microsoft DHCP clients. (Options: Broadcast, Hybrid, Mixed, Peer to Peer; Default: Hybrid)
- **Domain Name** – The domain name of the client. (Range: 1-32 characters)
- **Bootfile** – The default boot image for a DHCP client. This file should be placed on the Trivial File Transfer Protocol (TFTP) server specified as the Next Server.
- **Next Server** – The IP address of the next server in the boot process, which is typically a Trivial File Transfer Protocol (TFTP) server.
- **Lease Time** – The duration that an IP address is assigned to a DHCP client. (Options: fixed period, Infinite; Default: 1 day)

Examples

Creating a New Address Pool

Web – Click DHCP, Server, Pool Configuration. Specify a pool name, then click Add.

Pool Configuration

Pool Name:

Pool Name	Type	IP	Mask	Configure	Delete
tps	Network	10.1.0.0	255.255.255.0	<input type="button" value="Configure"/>	<input type="button" value="Delete"/>

Entry Count: 1

Figure 3-100 DHCP Server Pool Configuration

CLI – This example adds an address pool and enters DHCP pool configuration mode.

```
Console(config)#ip dhcp pool mgr
Console(config-dhcp)#
```

4-131

3 Configuring the Switch

Configuring a Network Address Pool

Web – Click DHCP, Server, Pool Configuration. Click the Configure button for any entry. Click the radio button for “Network.” Enter the IP address and subnet mask for the network pool. Configure the optional parameters such as gateway server and DNS server. Then click Apply.

Pool Name : tps >> [Go back to Pool Configure](#)

Network Host

IP: 10.1.0.0
Subnet Mask: 255.255.255.0

IP:
Subnet Mask:
Hardware Address: Ethernet
Client-Identifier: Hex

<<Option>>

Default Router: 10.1.0.253 (optional)
DNS Server: 10.2.3.4 (optional)
Netbios Server: 10.1.0.33 (optional)
Netbios type: Hybrid
Domain Name: example.com
Bootfile: wme.bat
Next Server: 10.1.0.21
Lease time: day hour min
 Infinite

Figure 3-101 DHCP Server Pool - Network Configuration

CLI – This example configures a network address pool.

```
Console(config)#ip dhcp pool tps 4-131
Console(config-dhcp)#network 10.1.0.0 255.255.255.0 4-132
Console(config-dhcp)#default-router 10.1.0.253 4-133
Console(config-dhcp)#dns-server 10.2.3.4 4-134
Console(config-dhcp)#netbios-name-server 10.1.0.33 4-135
Console(config-dhcp)#netbios-node-type hybrid 4-136
Console(config-dhcp)#domain-name example.com 4-133
Console(config-dhcp)#bootfile wme.bat 4-135
Console(config-dhcp)#next-server 10.1.0.21 4-134
Console(config-dhcp)#lease infinite 4-136
Console(config-dhcp)#
```


Configuring a Host Address Pool

Web – Click DHCP, Server, Pool Configuration. Click the Configure button for any entry. Click the radio button for “Host.” Enter the IP address, subnet mask, and hardware address for the client device. Configure the optional parameters such as gateway server and DNS server. Then click Apply.

Pool Name : mgr >> [Go back to Pool Configure](#)

Network

IP

Subnet Mask

Host

IP

Subnet Mask

Hardware Address

Client-Identifier

<<Option>>

Default Router <input type="text" value="10.1.0.253"/>	Default Router2 <input type="text"/> (optional)
DNS Server <input type="text" value="10.2.3.4"/>	DNS Server2 <input type="text"/> (optional)
Netbios Server <input type="text" value="10.1.0.33"/>	Netbios Server2 <input type="text"/> (optional)
Netbios type <input type="text" value="Hybrid"/>	
Domain Name <input type="text" value="example.com"/>	
Bootfile <input type="text" value="pc9.bat"/>	
Next Server <input type="text" value="10.1.0.21"/>	
Lease time <input type="radio"/> <input type="text"/> day <input type="text"/> hour <input type="text"/> min	
<input checked="" type="radio"/> Infinite	

Figure 3-102 DHCP Server Pool - Host Configuration

CLI – This example configures a host address pool.

```

Console(config)#ip dhcp pool mgr 4-131
Console(config-dhcp)#host 10.1.0.19 255.255.255.0 4-137
Console(config-dhcp)#hardware-address 00-e0-29-94-34-28 ethernet 4-139
Console(config-dhcp)#client-identifier text bear 4-138
Console(config-dhcp)#default-router 10.1.0.253 4-133
Console(config-dhcp)#dns-server 10.2.3.4 4-134
Console(config-dhcp)#netbios-name-server 10.1.0.33 4-135
Console(config-dhcp)#netbios-node-type hybrid 4-136
Console(config-dhcp)#domain-name example.com 4-133
Console(config-dhcp)#bootfile wme.bat 4-135
Console(config-dhcp)#next-server 10.1.0.21 4-134
Console(config-dhcp)#lease infinite 4-136
Console(config-dhcp)#

```

3 Configuring the Switch

Displaying Address Bindings


You can display the host devices which have acquired an IP address from this switch's DHCP server.

Command Attributes

- **IP Address** – IP address assigned to host.
- **Mac Address** – MAC address of host.
- **Lease time** – Duration that this IP address can be used by the host.
- **Start time** – Time this address was assigned by the switch.
- **Delete** – Clears this binding to the host. This command is normally used after modifying the address pool, or after moving DHCP service to another device.
- **Entry Count** – Number of hosts that have been given addresses by the switch.

Note: More than one DHCP server may respond to a service request by a host. In this case, the host generally accepts the first address assigned by any DHCP server.

Web – Click DHCP, Server, IP Binding. You may use the Delete button to clear an address from the DHCP server's database.

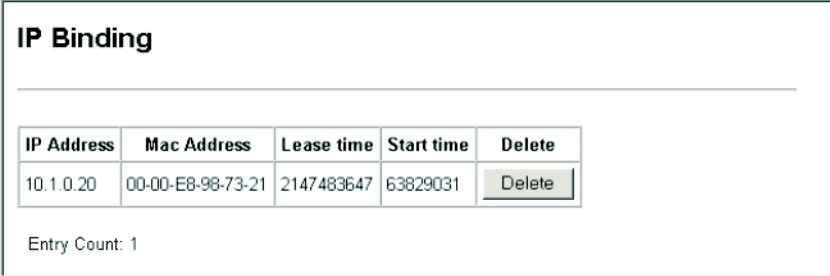

IP Address	Mac Address	Lease time	Start time	Delete
10.1.0.20	00-00-E8-98-73-21	2147483647	63829031	Delete

Entry Count: 1

Figure 3-103 DHCP Server - IP Binding

CLI – This example displays the current binding, and then clears all automatic binding.


```
Console#show ip dhcp binding 4-140
      IP                MAC                Lease Time      Start
-----
      10.1.0.20 00-00-e8-98-73-21      86400 Dec 25 08:01:57 2002
Console#clear ip dhcp binding * 4-139
Console#
```

Configuring Router Redundancy


Router redundancy protocols use a virtual IP address to support a primary router and multiple backup routers. The backup routers can be configured to take over the workload if the master router fails, or can also be configured to share the traffic load. The primary goal of router redundancy is to allow a host device which has been configured with a fixed gateway to maintain network connectivity in case the primary gateway goes down.

This switch supports the Virtual Router Redundancy Protocol (VRRP). VRRP requires you to specify the interface of one of the routers participating in the virtual group as the address for the master virtual router. It then selects the backup routers based on the specified virtual router priority. Router redundancy can be set up in any of the following configurations.

- A master virtual router with one or more backup routers.

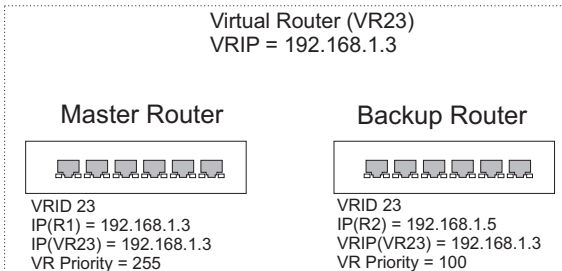


- Several virtual master routers using the same set of backup routers.

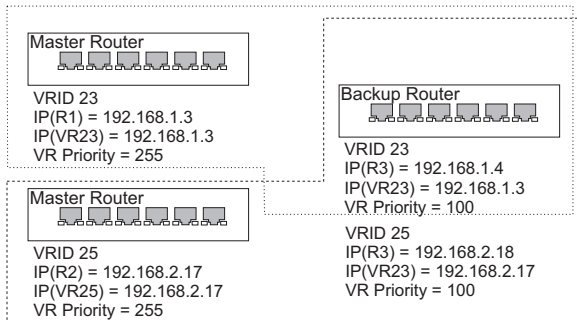

3 Configuring the Switch

- Several virtual master routers configured for mutual backup and load sharing. Load sharing can be accomplished by assigning a subset of addresses to different host address pools using the DHCP server. (See “Configuring Address Pools” on page 3-168.)

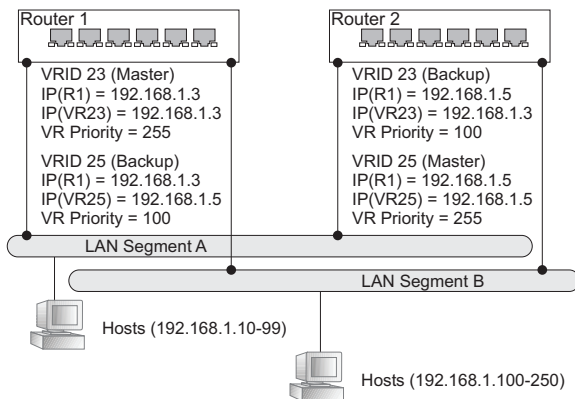

Virtual Router Redundancy Protocol

Virtual Router Redundancy Protocol (VRRP) allows you to configure a group of routers as a single virtual router. The virtual router group is configured with a single virtual IP address that can be used as the default gateway for host devices on the attached network.

Configuring VRRP Groups

To configure VRRP, select an interface on one router in the group to serve as the master virtual router. This physical interface is used as the virtual address for the router group. Now set the same virtual address and a priority on the backup routers, and configure an authentication string. You can also enable the preempt feature which allows a router to take over as the master router when it comes on line.

Command Usage

Address Assignment –

- The IP address assigned to the virtual router must already be configured on the router that will be the Owner. In other words, the IP address for the virtual router exists on one, and only one, router in the virtual router group, and the network mask for the virtual router address is derived from the Owner. The Owner will also assume the role of the Master virtual router in the group.
- If you have multiple secondary addresses configured on the current VLAN interface, you can add any of these addresses to the virtual router group.
- The interfaces of all routers participating in a virtual router group must be within the same IP subnet.

- VRRP creates a virtual MAC address for the master router based on a standard prefix, with the last octet equal to the group ID. When a backup router takes over as the master, it continues to forward traffic addressed to this virtual MAC address. However, the backup router cannot reply to ICMP pings sent to addresses associated with the virtual group because the IP address owner is off line.

Virtual Router Priority –

- The Owner of the virtual IP address is automatically assigned the highest possible virtual router priority of 255. The backup router with the highest priority will become the master router if the current master fails. However, because the priority of the virtual IP address Owner is the highest, the original master router will always become the active master router when it recovers.
- If two or more routers are configured with the same VRRP priority, the router with the higher IP address is elected as the new master router if the current master fails.

Preempting the Acting Master –

- The virtual IP Owner has the highest priority, so no other router can preempt it, and it will always resume control as the master virtual router when it comes back on line. The preempt function only allows a backup router to take over from another backup router that is temporarily acting as the group master. If preemption is enabled and this router has a higher priority than the current acting master when it comes on line, it will take over as the acting group master.
- You can add a delay to the preempt function to give additional time to receive an advertisement message from the current master before taking control. If the router attempting to become the master has just come on line, this delay also gives it time to gather information for its routing table before actually preempting the currently active master router.

Field Attributes (VRRP Group Configuration)

- **VLAN ID** – ID of a VLAN configured with an IP interface. (Range: 1-4094; Default: 1)
- **VRID** – VRRP group identifier. (Range: 1-255)
- **State** – VRRP router role. (Values: Master, Backup)
- **Virtual Address** – Virtual IP address for this group.
- **Interval** – Interval at which the master virtual router sends advertisements communicating its state as the master.
- **Preemption** – Shows if this router is allowed to preempt the acting master.
- **Priority** – Priority of this router in the VRRP group.
- **AuthType** – Authentication mode used to verify VRRP packets from other routers.

3 Configuring the Switch

Command Attributes (VRRP Group Configuration Detail)

- **Associated IP Table** – IP interfaces associated with this virtual router group.
- **Associated IP** – IP address of the virtual router, or secondary IP addresses assigned to the current VLAN interface that are supported by this VRRP group. If this address matches a real interface on this switch, then this interface will become the virtual master router for this VRRP group.
- **Advertisement Interval** – Interval at which the master virtual router sends advertisements communicating its state as the master. (Range: 1-255 seconds; Default: 1 second)
 - VRRP advertisements from the current master virtual router include information about its priority and current state as the master.
 - VRRP advertisements are sent to the multicast address 224.0.0.8. Using a multicast address reduces the amount of traffic that has to be processed by network devices that are not part of the designated VRRP group.
 - If the master router stops sending advertisements, backup routers will bid to become the master router based on priority. The dead interval before attempting to take over as the master is three times the hello interval plus half a second.
- **Preempt Mode** – Allows a backup router to take over as the master virtual router if it has a higher priority than the acting master virtual router (i.e., another backup router that has taken over from the VRRP group address owner.) (Default: Enabled)
- **Preempt Delay** – Time to wait before issuing a claim to become the master. (Range: 0-120 seconds; 0 seconds)
- **Priority** – The priority of this router in a VRRP group. (Range: 1-254; Default: 100)
 - The priority for the VRRP group address owner is automatically set to 255.
 - The priority for backup routers is used to determine which router will take over as the acting master router if the current master fails.
- **Authentication Type** – Authentication mode used to verify VRRP packets received from other routers. (Options: None, Simple Text)
 - If simple text authentication is selected, then you must also enter an authentication string.
 - All routers in the same VRRP group must be set to the same authentication mode, and be configured with the same authentication string.
 - Plain text authentication does not provide any real security. It is supported only to prevent a misconfigured router from participating in VRRP.
- **Authentication String** – Key used to authenticate VRRP packets received from other routers. (Range: 1-8 alphanumeric characters)
 - When a VRRP packet is received from another router in the group, its authentication string is compared to the string configured on this router. If the strings match, the message is accepted. Otherwise, the packet is discarded.

Web – Click IP, VRRP, Group Configuration. Select the VLAN ID, enter the VRID group number, and click Add.

VRRP Group Configuration

VLAN ID	VRID	State	Virtual address	Interval	Preemption	Priority	AuthType	Edit	Delete
1	1	Master	10.1.2.254	1	Enabled	100	Simple Text	Edit	Delete
1	1	Master	10.1.3.254	1	Enabled	100	Simple Text	Edit	Delete
1	5	Master	10.1.1.254	1	Enabled	100	Simple Text	Edit	Delete

Total VRRP group: 1

VLAN ID

VRID

Figure 3-104 VRRP Group Configuration

3 Configuring the Switch

Click the Edit button for a group entry to open the detailed configuration window. Enter the IP address of a real interface on this router to make it the master virtual router for the group. Otherwise, enter the virtual address for an existing group to make it a backup router. Click Add IP to enter an IP address into the Associated IP Table. Then set any of the other parameters as required, and click Apply.

VRRP Group Configuration Detail

VLAN ID : 1, VRID : 1

Associated IP Table	10.1.2.254 10.1.3.254
Associated IP	<input type="text"/>

Advertisement Interval	<input type="text" value="1"/>
Preempt Mode	<input checked="" type="checkbox"/> Enabled
Preempt Delay	<input type="text" value="0"/>
Priority	<input type="text" value="100"/>
Authentication Type	Simple Text <input type="button" value="v"/>
Authentication String	<input type="text"/>

Figure 3-105 VRRP Group Configuration Detail

CLI – This example creates VRRP group 1, sets this switch as the master virtual router by assigning the primary interface address for the selected VLAN to the virtual IP address. It then adds a secondary IP address to the VRRP group, sets all of the other VRRP parameters, and then displays the configured settings.

```

Console(config)#interface vlan 1                                4-191
Console(config-if)#vrrp 1 ip 192.168.1.6                      4-312
Console(config-if)#vrrp 1 ip 192.168.2.6 secondary
Console(config-if)#vrrp 1 timers advertise 5                  4-314
Console(config-if)#vrrp 1 preempt delay 10                    4-315
Console(config-if)#vrrp 1 priority 1                           4-313
Console(config-if)#vrrp 1 authentication bluebird              4-313
Console(config-if)#end
Console#show vrrp                                             4-316
  Vlan 1 - Group 1,
  state                               Master
  Virtual IP address                   192.168.1.6
  Virtual MAC address                  00-00-5E-00-01-01
  Advertisement interval                5 sec
  Preemption                           enabled
  Min delay                             10 sec
  Priority                               1
  Authentication                       SimpleText
  Authentication key                   bluebird
  Master Router                        192.168.1.6
  Master priority                       255
  Master Advertisement interval         5 sec
  Master down interval                 15
Console#

```

Displaying VRRP Global Statistics

The VRRP Global Statistics page displays counters for errors found in VRRP protocol packets.

Field Attributes

- **VRRP Packets with Invalid Checksum** – The total number of VRRP packets received with an invalid VRRP checksum value.
- **VRRP Packets with Unknown Error** – The total number of VRRP packets received with an unknown or unsupported version number.
- **VRRP Packets with Invalid VRID** – The total number of VRRP packets received with an invalid VRID for this virtual router.

Web – Click IP, VRRP, Global Statistics.

VRRP Global Statistics	
VRRP Packets with Invalid Checksum	0
VRRP Packets with Unknown Error	0
VRRP Packets with Invalid VRID	0

Figure 3-106 VRRP Global Statistics

3 Configuring the Switch

CLI – This example displays counters for protocol errors for all the VRRP groups configured on this switch.

```
Console#show vrrp router counters 4-318
  VRRP Packets with Invalid Checksum : 0
  VRRP Packets with Unknown Error   : 0
  VRRP Packets with Invalid VRID    : 0
Console#
```

Displaying VRRP Group Statistics

The VRRP Group Statistics page displays counters for VRRP protocol events and errors that have occurred on a specific VRRP interface.

Field Attributes

- **VLAN ID** – ID of a VLAN configured with an IP interface. (Range: 1-4094; Default: 1)
- **VRID** – VRRP group identifier. (Range: 1-255)
- **Times Become Master** – Number of times this router has transitioned to master.
- **Received Packets** – Number of VRRP advertisements received by this router.
- **Error Interval Packets** – Number of VRRP advertisements received for which the advertisement interval is different from the one configured for the local virtual router.
- **Authentication Failures** – Number of VRRP packets received that do not pass the authentication check.
- **Error IP TTL Packets** – Number of VRRP packets received by the virtual router with IP TTL (Time-To-Live) not equal to 255.
- **Received Priority 0 Packets** – Number of VRRP packets received by the virtual router with priority set to 0.
- **Error Packet Length Packets** – Number of packets received with a packet length less than the length of the VRRP header.
- **Invalid Type Packets** – Number of VRRP packets received by the virtual router with an invalid value in the “type” field.
- **Error Address List Packets** – Number of packets received for which the address list does not match the locally configured list for the virtual router.
- **Invalid Authentication Type Packets** – Number of packets received with an unknown authentication type.
- **Mismatch Authentication Type Packets** – Number of packets received with “Auth Type” not equal to the locally configured authentication method.
- **Sent Priority 0 Packets** – Number of VRRP packets sent by the virtual router with priority set to 0.

Web – Click IP, VRRP, Group Statistics. Select the VLAN and virtual router group.

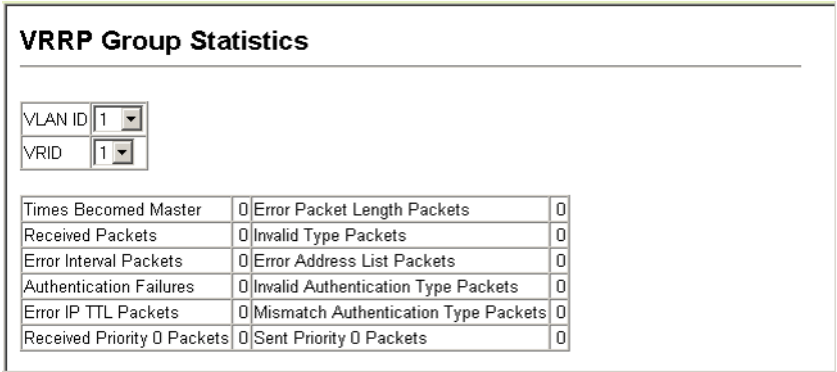


Figure 3-107 VRRP Group Statistics

CLI – This example displays VRRP protocol statistics for group 1, VLAN 1.

```

Console#show vrrp 1 interface vlan 1 counters 4-319
Total Number of Times Transitioned to MASTER : 6
Total Number of Received Advertisements Packets : 0
Total Number of Received Error Advertisement Interval Packets : 0
Total Number of Received Authentication Failures Packets : 0
Total Number of Received Error IP TTL VRRP Packets : 0
Total Number of Received Priority 0 VRRP Packets : 0
Total Number of Sent Priority 0 VRRP Packets : 5
Total Number of Received Invalid Type VRRP Packets : 0
Total Number of Received Error Address List VRRP Packets : 0
Total Number of Received Invalid Authentication Type VRRP Packets : 0
Total Number of Received Mismatch Authentication Type VRRP Packets : 0
Total Number of Received Error Packet Length VRRP Packets : 0
Console#

```

IP Routing


Overview

This switch supports IP routing and routing path management via static routing definitions (page 3-200) and dynamic routing such as RIP (page 3-202) or OSPF (page 3-212). When IP routing is enabled (page 3-203), this switch acts as a wire-speed router, passing traffic between VLANs using different IP interfaces, and routing traffic to external IP networks. However, when the switch is first booted, no default routing is defined. As with all traditional routers, the routing functions must first be configured to work.

Initial Configuration

In the default configuration, all ports belong to the same VLAN and the switch provides only Layer 2 functionality. Therefore, you should first create VLANs for each unique user group or application traffic (page 3-123), assign all ports that belong to the same group to these VLANs (page 3-124), and then assign an IP interface to each VLAN (page 3-186). By separating the network into different VLANs, it can be partitioned into subnetworks that are disconnected at Layer 2. Network traffic within the same subnet is still switched using Layer 2 switching. And the VLANs can now be interconnected (only as required) with Layer 3 switching.

Each VLAN represents a virtual interface to Layer 3. You just need to provide the network address for each virtual interface, and the traffic between different subnetworks will be routed by Layer 3 switching.

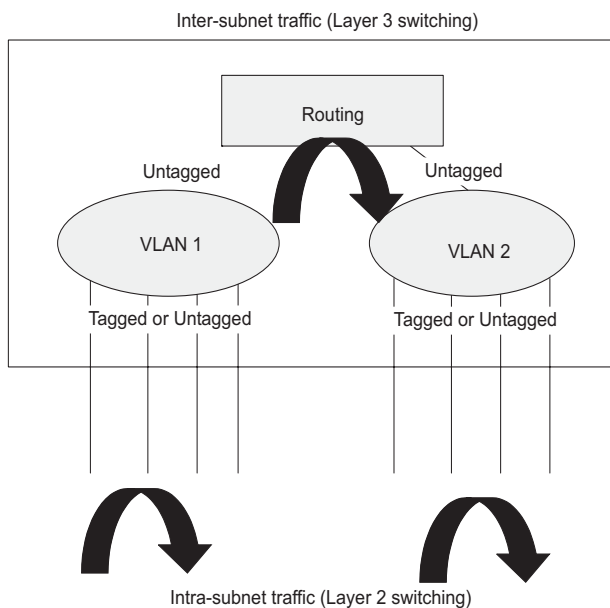

IP Switching

IP Switching (or packet forwarding) encompasses tasks required to forward packets for both Layer 2 and Layer 3, as well as traditional routing. These functions include:

- Layer 2 forwarding (switching) based on the Layer 2 destination MAC address
- Layer 3 forwarding (routing):
 - Based on the Layer 3 destination address
 - Replacing destination/source MAC addresses for each hop
 - Incrementing the hop count
 - Decrementing the time-to-live
 - Verifying and recalculating the Layer 3 checksum

If the destination node is on the same subnetwork as the source network, then the packet can be transmitted directly without the help of a router. However, if the MAC address is not yet known to the switch, an Address Resolution Protocol (ARP) packet with the destination IP address is broadcast to get the destination MAC address from the destination node. The IP packet can then be sent directly with the destination MAC address.

If the destination belongs to a different subnet on this switch, the packet can be routed directly to the destination node. However, if the packet belongs to a subnet not included on this switch, then the packet should be sent to a router (with the MAC address of the router itself used as the destination MAC address, and the destination IP address of the destination node). The router will then forward the packet to the destination node via the correct path. The router can also use the ARP protocol to find out the MAC address of the destination node of the next router as necessary.

Note: In order to perform IP switching, the switch should be recognized by other network nodes as an IP router, either by setting it as the default gateway or by redirection from another router via the ICMP process.

When the switch receives an IP packet addressed to its own MAC address, the packet follows the Layer 3 routing process. The destination IP address is checked against the Layer 3 address table. If the address is not already there, the switch broadcasts an ARP packet to all the ports on the destination VLAN to find out the destination MAC address. After the MAC address is discovered, the packet is reformatted and sent out to the destination. The reformat process includes decreasing the Time-To-Live (TTL) field of the IP header, recalculating the IP header checksum, and replacing the destination MAC address with either the MAC address of the destination node or that of the next hop router.

When another packet destined to the same node arrives, the destination MAC can be retrieved directly from the Layer 3 address table; the packet is then reformatted and sent out the destination port. IP switching can be done at wire-speed when the destination address entry is already in the Layer 3 address table.

If the switch determines that a frame must be routed, the route is calculated only during setup. Once the route has been determined, all packets in the current flow are simply switched or forwarded across the chosen path. This takes advantage of

3 Configuring the Switch

the high throughput and low latency of switching by enabling the traffic to bypass the routing engine once the path calculation has been performed.

Routing Path Management

Routing Path Management involves the determination and updating of all the routing information required for packet forwarding, including:

- Handling routing protocols
- Updating the routing table
- Updating the Layer 3 switching database

Routing Protocols

The switch supports both static and dynamic routing.

- Static routing requires routing information to be stored in the switch either manually or when a connection is set up by an application outside the switch.
- Dynamic routing uses a routing protocol to exchange routing information, calculate routing tables, and respond to changes in the status or loading of the network.

The switch supports RIP, RIP-2 and OSPFv2 dynamic routing protocols.

RIP and RIP-2 Dynamic Routing Protocols

The RIP protocol is the most widely used routing protocol. RIP uses a distance-vector-based approach to routing. Routes are determined on the basis of minimizing the distance vector, or hop count, which serves as a rough estimate of transmission cost. Each router broadcasts its advertisement every 30 seconds, together with any updates to its routing table. This allows all routers on the network to learn consistent tables of next hop links which lead to relevant subnets.

OSPFv2 Dynamic Routing Protocol

OSPF overcomes all the problems of RIP. It uses a link state routing protocol to generate a shortest-path tree, then builds up its routing table based on this tree. OSPF produces a more stable network because the participating routers act on network changes predictably and simultaneously, converging on the best route more quickly than RIP. Moreover, when several equal-cost routes to a destination exist, traffic can be distributed equally among them.

Non-IP Protocol Routing

The switch supports IP routing only. Non-IP protocols such as IPX and Appletalk cannot be routed by this switch, and will be confined within their local VLAN group unless bridged by an external router.

To coexist with a network built on multilayer switches, the subnetworks for non-IP protocols must follow the same logical boundary as that of the IP subnetworks. A separate multi-protocol router can then be used to link the subnetworks by connecting to one port from each available VLAN on the network.

Basic IP Interface Configuration

To allow routing between different IP subnets, you must enable IP Routing as described in this section. You also need to define a VLAN for each IP subnet that will be connected directly to this switch. Note that you must first create a VLAN as described under "Creating VLANs" on page 3-123 before configuring the corresponding subnet. Remember that if you need to manage the switch in-band then you must define the IP subnet address for at least one VLAN.

Command Attributes

- **IP Routing Status** – Configures the switch to operate as a Layer 2 switch or as a multilayer routing switch. (Options: Disable this field to restrict operation to Layer 2 switching; enable it to allow multilayer operation at either Layer 2 or 3 as required.)
 - This command affects both static and dynamic unicast routing.
 - If IP routing is enabled, all IP packets are routed using either static routing or dynamic routing via RIP or OSPF, and other packets for all non-IP protocols (e.g., NetBuei, NetWare or AppleTalk) are switched based on MAC addresses. If IP routing is disabled, all packets are switched, with filtering and forwarding decisions based strictly on MAC addresses.
- **Default Gateway** – The routing device to which the switch will pass packets for all unknown subnets; i.e., packets that do not match any routing table entry. (Valid IP addresses consist of four numbers, 0 to 255, separated by periods.)

Web - Click IP, General, Global Settings. Set IP Routing Status to Disabled to restrict operation to Layer 2, or Enabled to allow multilayer switching, specify the default gateway which will be forwarded packets for all unknown subnets, and click Apply.

Global Settings

IP Routing Status	Enabled ▾
Default Gateway	10.1.0.254

Clear default gateway

Figure 3-108 IP Global Settings

CLI - This example enables IP routing, and sets the default gateway.

```
Console(config)#ip routing 4-244
Console(config)#ip route default 10.1.0.254 4-245
```

Configuring IP Routing Interfaces

You can specify the IP subnets connected to this router by manually assigning an IP address to each VLAN, or by using the RIP or OSPF dynamic routing protocol to identify routes that lead to other interfaces by exchanging protocol messages with other routers on the network.

Command Usage

- If this router is directly connected to end node devices (or connected to end nodes via shared media) that will be assigned to a specific subnet, then you must create a router interface for each VLAN that will support routing. The router interface consists of an IP address and subnet mask. This interface address defines both the network number to which the router interface is attached and the router's host number on that network. In other words, a router interface address defines the network and subnetwork numbers of the segment that is connected to that interface, and allows you to send IP packets to or from the router.
- Before you configure any network interfaces on this router, you should first create a VLAN for each unique user group, or for each network application and its associated users. Then assign the ports associated with each of these VLANs.

Command Attributes

- **VLAN ID** – ID of configured VLAN (1-4094).
- **IP Address Mode** – Specifies whether the IP address for this interface is statically assigned, or obtained from a network address server. (Options: Static, DHCP - Dynamic Host Configuration Protocol, BOOTP - Boot Protocol; Default: Static)
 - If Static address type is selected, then you must also specify whether the IP address is the primary IP address on the VLAN or a secondary IP address. An interface can have only one primary IP address, but can have multiple secondary IP addresses. In other words, you will need to specify secondary addresses if more than one IP subnet can be accessed via this interface.
 - If DHCP/BOOTP is enabled, IP will not function until a reply has been received from the address server. Requests will be broadcast periodically by the router for an IP address. (DHCP/BOOTP values include the IP address and subnet mask.)
- **IP Address** – Address of the VLAN interface. Valid IP addresses consist of four numbers, 0 to 255, separated by periods.
- **Subnet Mask** – This mask identifies the host address bits used for routing to specific subnets.

Web - Click IP, General, Routing Interface. Specify an IP interface for each VLAN that will support routing to other subnets. First specify a primary address, and click Set IP Configuration. If you need to assign secondary addresses, enter these addresses one at a time, and click Set IP Configuration after entering each address.

Routing Interface

VLAN	<input type="text" value="1"/>
IP Address Mode	<input type="text" value="Static"/> <input type="text" value="Primary"/>
IP Address	<input type="text" value="10.1.0.253"/>
Subnet Mask	<input type="text" value="255.255.255.0"/>

Figure 3-109 IP Routing Interface

CLI - This example sets a primary IP address for VLAN 1, and then adds a secondary IP address for a different subnet also attached to this router interface.

```

Console(config)#interface vlan 1
Console(config-if)#ip address 10.1.0.253 255.255.255.0           4-236
Console(config-if)#ip address 10.1.9.253 255.255.255.0 secondary
Console(config-if)#

```

Address Resolution Protocol

If IP routing is enabled (page 3-185), the router uses its routing tables to make routing decisions, and uses Address Resolution Protocol (ARP) to forward traffic from one hop to the next. ARP is used to map an IP address to a physical layer (i.e., MAC) address. When an IP frame is received by this router (or any standards-based router), it first looks up the MAC address corresponding to the destination IP address in the ARP cache. If the address is found, the router writes the MAC address into the appropriate field in the frame header, and forwards the frame on to the next hop. IP traffic passes along the path to its final destination in this way, with each routing device mapping the destination IP address to the MAC address of the next hop toward the recipient, until the packet is delivered to the final destination.

If there is no entry for an IP address in the ARP cache, the router will broadcast an ARP request packet to all devices on the network. The ARP request contains the following fields similar to that shown in this example:


Table 3-13 Address Resolution Protocol

destination IP address	10.1.0.19
destination MAC address	?
source IP address	10.1.0.253
source MAC address	00-00-ab-cd-00-00

When devices receive this request, they discard it if their address does not match the destination IP address in the message. However, if it does match, they write their own hardware address into the destination MAC address field and send the message back to the source hardware address. When the source device receives a reply, it writes the destination IP address and corresponding MAC address into its cache, and forwards the IP traffic on to the next hop. As long as this entry has not timed out, the router will be able forward traffic directly to the next hop for this destination without having to broadcast another ARP request.

Proxy ARP

When a node in the attached subnetwork does not have routing or a default gateway configured, Proxy ARP can be used to forward ARP requests to a remote subnetwork. When the router receives an ARP request for a remote network and Proxy ARP is enabled, it determines if it has the best route to the remote network, and then answers the ARP request by sending its own MAC address to the requesting node. That node then sends traffic to the router, which in turn uses its own routing table to forward the traffic to the remote destination.

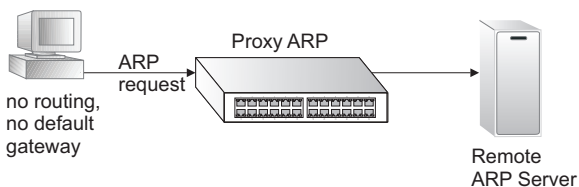

Basic ARP Configuration

You can use the ARP General configuration menu to specify the timeout for ARP cache entries, or to enable Proxy ARP for specific VLAN interfaces.

Command Usage

- The aging time determines how long dynamic entries remain the cache. If the timeout is too short, the router may tie up resources by repeating ARP requests for addresses recently flushed from the table.
- End stations that require Proxy ARP must view the entire network as a single network. These nodes must therefore use a smaller subnet mask than that used by the router or other relevant network devices.
- Extensive use of Proxy ARP can degrade router performance because it may lead to increased ARP traffic and increased search time for larger ARP address tables.

Command Attributes

- **Timeout** – Sets the aging time for dynamic entries in the ARP cache. (Range: 300 - 86400 seconds; Default: 1200 seconds or 20 minutes)
- **Proxy ARP** – Enables or disables Proxy ARP for specified VLAN interfaces.

Web - Click IP, ARP, General. Set the timeout to a suitable value for the ARP cache, enable Proxy ARP for subnetworks that do not have routing or a default gateway, and click Apply.

General	
<hr/>	
Timeout	
Set Timeout (300 - 86400 seconds)	900
Proxy ARP	
Vlan	3
Status	Enabled

Figure 3-110 ARP General

CLI - This example sets the ARP cache timeout for 15 minutes (i.e., 900 seconds), and enables Proxy ARP for VLAN 3.

```

Console(config)#arp-timeout 900           4-242
Console(config)#interface vlan 3         4-149
Console(config-if)#ip proxy-arp         4-243
Console(config-if)#

```

3 Configuring the Switch

Configuring Static ARP Addresses

For devices that do not respond to ARP requests, traffic will be dropped because the IP address cannot be mapped to a physical address. If this occurs, you can manually map an IP address to the corresponding physical address in the ARP.

Command Usage

- You can define up to 128 static entries in the ARP cache.
- Static entries will not be aged out or deleted when power is reset. You can only remove a static entry via the configuration interface.

Command Attributes

- **IP Address** – IP address statically mapped to a physical MAC address. (Valid IP addresses consist of four numbers, 0 to 255, separated by periods.)
- **MAC Address** – MAC address statically mapped to the corresponding IP address. (Valid MAC addresses are hexadecimal numbers in the format: xx-xx-xx-xx-xx-xx.)
- **Entry Count** – The number of static entries in the ARP cache.

Web - Click IP, ARP, Static Addresses. Enter the IP address, the corresponding MAC address, and click Apply.

Static Addresses

Current:
IP address, MAC address, Interface
10.1.0.11, 00-11-22-33-44-55, 1

New:

<< Add IP Address:
Remove MAC Address:

Entry Count: 1

Figure 3-111 ARP Static Addresses

CLI - This example sets a static entry for the ARP cache.

```
Console(config)#arp 10.1.0.11 00-11-22-33-44-55 4-241  
Console(config)#
```

Displaying Dynamically Learned ARP Entries

The ARP cache contains entries that map IP addresses to the corresponding physical address. Most of these entries will be dynamically learned through replies to broadcast messages. You can display all of the dynamic entries in the ARP cache, change specific dynamic entries into static entries, or clear all dynamic entries from the cache.

Command Attributes

- **IP Address** – IP address of a dynamic entry in the cache.
- **MAC Address** – MAC address mapped to the corresponding IP address.
- **Interface** – VLAN interface associated with the address entry.
- **Dynamic to Static**²³ – Changes a selected dynamic entry to a static entry.
- **Clear All**²³ – Deletes all dynamic entries from the ARP cache.
- **Entry Count** – The number of dynamic entries in the ARP cache.

Web - Click IP, ARP, Dynamic Addresses. You can use the buttons provided to change a dynamic entry to a static entry, or to clear all dynamic entries in the cache.

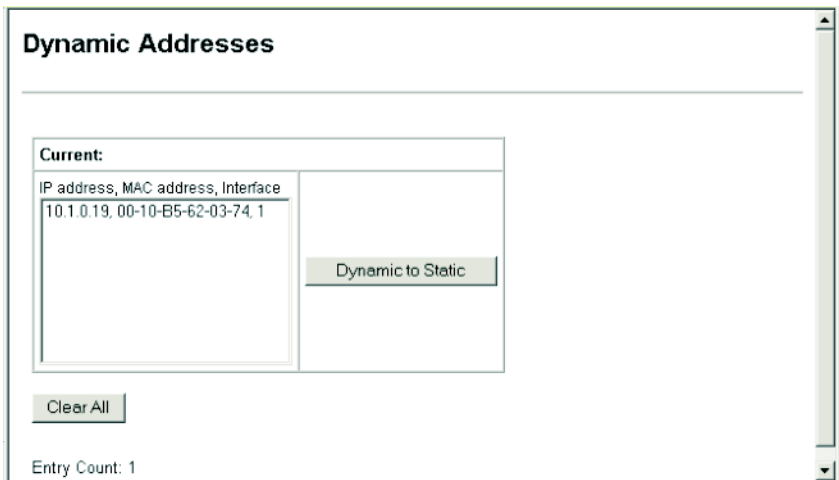


Figure 3-112 ARP Dynamic Addresses

23. These buttons take effect immediately. You are not prompted to confirm the action.

3 Configuring the Switch

CLI - This example shows all entries in the ARP cache.

```
Console#show arp 4-242
Arp cache timeout: 1200 (seconds)

-----
  IP Address      MAC Address      Type      Interface
-----
    10.1.0.0     ff-ff-ff-ff-ff-ff   other         1
    10.1.0.11    00-11-22-33-44-55   static        1
    10.1.0.12    01-02-03-04-05-06   static        1
    10.1.0.19    00-10-b5-62-03-74   dynamic       1
    10.1.0.253   00-00-ab-cd-00-00   other         1
    10.1.0.255   ff-ff-ff-ff-ff-ff   other         1

Total entry : 6
Console#clear arp-cache 4-242
This operation will delete all the dynamic entries in ARP Cache.
Are you sure to continue this operation (y/n)?y
Console#
```


Displaying Local ARP Entries

The ARP cache also contains entries for local interfaces, including subnet, host, and broadcast addresses.

Command Attributes

- **IP Address** – IP address of a local entry in the cache.
- **MAC Address** – MAC address mapped to the corresponding IP address.
- **Interface** – VLAN interface associated with the address entry.
- **Entry Count** – The number of local entries in the ARP cache.

Web - Click IP, ARP, Other Addresses.

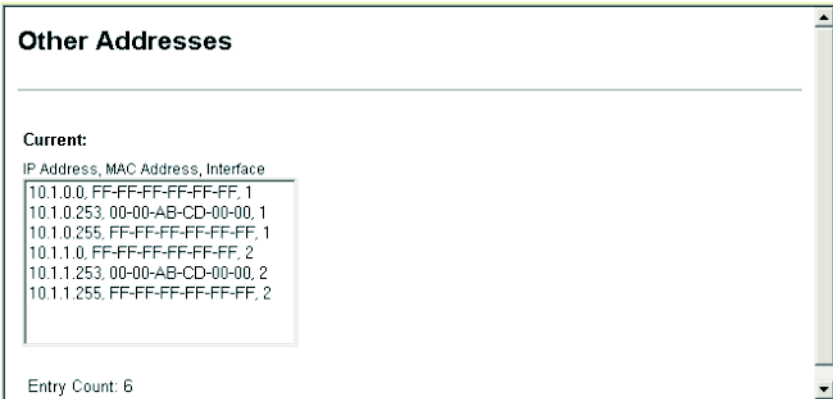

Other Addresses

Current:

IP Address	MAC Address	Interface
10.1.0.0	FF-FF-FF-FF-FF-FF	1
10.1.0.253	00-00-AB-CD-00-00	1
10.1.0.255	FF-FF-FF-FF-FF-FF	1
10.1.1.0	FF-FF-FF-FF-FF-FF	2
10.1.1.253	00-00-AB-CD-00-00	2
10.1.1.255	FF-FF-FF-FF-FF-FF	2

Entry Count: 6

Figure 3-113 ARP Other Addresses

CLI - This router uses the Type specification “other” to indicate local cache entries in the ARP cache.

```

Console#show arp
Arp cache timeout: 1200 (seconds)
-----
IP Address      MAC Address      Type      Interface
-----
10.1.0.0        ff-ff-ff-ff-ff-ff  other     1
10.1.0.11       00-11-22-33-44-55  static    1
10.1.0.12       01-02-03-04-05-06  static    1
10.1.0.19       00-10-b5-62-03-74  dynamic   1
10.1.0.253      00-00-ab-cd-00-00  other     1
10.1.0.255      ff-ff-ff-ff-ff-ff  other     1

Total entry : 6
Console#
  
```

Displaying ARP Statistics

You can display statistics for ARP messages crossing all interfaces on this router.

Table 3-14 ARP Statistics

Parameter	Description
Received Request	Number of ARP Request packets received by the router.
Received Reply	Number of ARP Reply packets received by the router.
Sent Request	Number of ARP Request packets sent by the router.
Sent Reply	Number of ARP Reply packets sent by the router.

Web - Click IP, ARP, Statistics.



Figure 3-114 ARP Statistics

3 Configuring the Switch

CLI - This example provides detailed statistics on common IP-related protocols.

```
Console#show ip traffic 4-248
IP statistics:
  Rcvd:  5 total, 5 local destination
         0 checksum errors
         0 unknown protocol, 0 not a gateway
  Frags: 0 reassembled, 0 timeouts
         0 fragmented, 0 couldn't fragment
  Sent:  9 generated
         0 no route
ICMP statistics:
  Rcvd: 0 checksum errors, 0 redirects, 0 unreachable, 0 echo
         5 echo reply, 0 mask requests, 0 mask replies, 0 quench
         0 parameter, 0 timestamp
  Sent: 0 redirects, 0 unreachable, 0 echo, 0 echo reply
         0 mask requests, 0 mask replies, 0 quench, 0 timestamp
         0 time exceeded, 0 parameter problem
UDP statistics:
  Rcvd: 0 total, 0 checksum errors, 0 no port
  Sent: 0 total
TCP statistics:
  Rcvd: 0 total, 0 checksum errors
  Sent: 0 total
ARP statistics:
  Rcvd: 0 requests, 1 replies
  Sent: 1 requests, 0 replies
Console#
```

Displaying Statistics for IP Protocols

IP Statistics

The Internet Protocol (IP) provides a mechanism for transmitting blocks of data (often called packets or frames) from a source to a destination, where these network devices (i.e., hosts) are identified by fixed length addresses. The Internet Protocol also provides for fragmentation and reassembly of long packets, if necessary, for transmission through “small packet” networks.

Table 3-15 IP Statistics


Parameter	Description
Packets Received	The total number of input datagrams received from interfaces, including those received in error.
Received Address Errors	The number of input datagrams discarded because the IP address in the header's destination field was not a valid address for this entity.
Received Packets Discarded	The number of input datagrams for which no problems were encountered to prevent their continued processing, but which were discarded (e.g., for lack of buffer space).
Output Requests	The total number of datagrams which local IP user-protocols (including ICMP) supplied to IP in requests for transmission.
Output Packet No Route	The number of datagrams discarded because no route could be found to transmit them to their destination. Note that this includes any datagrams which a host cannot route because all of its default gateways are down.

Table 3-15 IP Statistics (Continued)

Parameter	Description
Datagrams Forwarded	The number of input datagrams for which this entity was not their final IP destination, as a result of which an attempt was made to find a route to forward them to that final destination.
Reassembly Required	The number of IP fragments received which needed to be reassembled at this entity.
Reassembly Failures	The number of failures detected by the IP re-assembly algorithm (for whatever reason: timed out, errors, etc.).
Datagrams Failing Fragmentation	The number of datagrams that have been discarded because they needed to be fragmented at this entity but could not be, e.g., because their "Don't Fragment" flag was set.
Received Header Errors	The number of input datagrams discarded due to errors in their IP headers, including bad checksums, version number mismatch, other format errors, time-to-live exceeded, errors discovered in processing their IP options, etc.
Unknown Protocols Received	The number of locally-addressed datagrams received successfully but discarded because of an unknown or unsupported protocol.
Received Packets Delivered	The total number of input datagrams successfully delivered to IP user-protocols (including ICMP).
Discarded Output Packets	The number of output IP datagrams for which no problem was encountered to prevent their transmission to their destination, but which were discarded (e.g., for lack of buffer space).
Fragments Created	The number of datagram fragments that have been generated as a result of fragmentation at this entity.
Routing Discards	The number of routing entries which were chosen to be discarded even though they are valid. One possible reason for discarding such an entry could be to free-up buffer space for other routing entries.
Reassembly Successful	The number of datagrams successfully re-assembled.
Datagrams Successfully Fragmented	The number of IP datagrams that have been successfully fragmented at this entity.

3 Configuring the Switch

Web - Click IP, Statistics, IP.

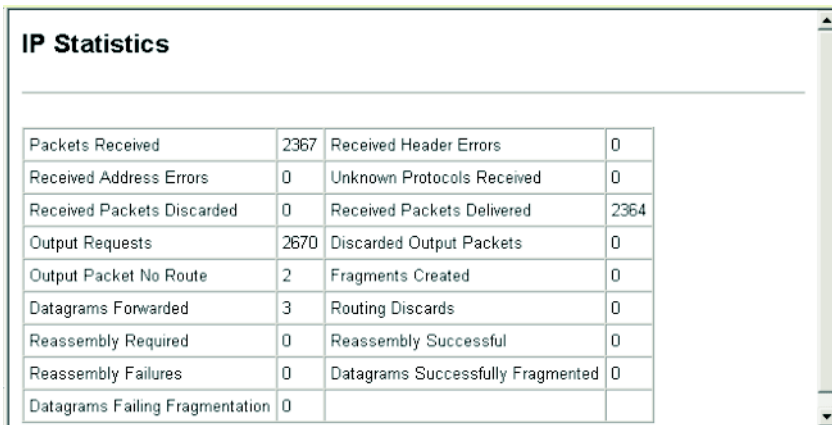

IP Statistics			
Packets Received	2367	Received Header Errors	0
Received Address Errors	0	Unknown Protocols Received	0
Received Packets Discarded	0	Received Packets Delivered	2364
Output Requests	2670	Discarded Output Packets	0
Output Packet No Route	2	Fragments Created	0
Datagrams Forwarded	3	Routing Discards	0
Reassembly Required	0	Reassembly Successful	0
Reassembly Failures	0	Datagrams Successfully Fragmented	0
Datagrams Failing Fragmentation	0		

Figure 3-115 IP Statistics

CLI - See the example on page 3-193.

ICMP Statistics

Internet Control Message Protocol (ICMP) is a network layer protocol that transmits message packets to report errors in processing IP packets. ICMP is therefore an integral part of the Internet Protocol. ICMP messages may be used to report various situations, such as when a datagram cannot reach its destination, when the gateway does not have the buffering capacity to forward a datagram, and when the gateway can direct the host to send traffic on a shorter route. ICMP is also used by routers to feed back information about more suitable routes (i.e., the next hop router) to use for a specific destination.


Table 3-16 ICMP Statistics

Parameter	Description
Messages	The total number of ICMP messages which the entity received/sent.
Errors	The number of ICMP messages which the entity received/sent but determined as having ICMP-specific errors (bad ICMP checksums, bad length, etc.).
Destination Unreachable	The number of ICMP Destination Unreachable messages received/sent.
Time Exceeded	The number of ICMP Time Exceeded messages received/sent.
Parameter Problems	The number of ICMP Parameter Problem messages received/sent.
Source Quenches	The number of ICMP Source Quench messages received/sent.
Redirects	The number of ICMP Redirect messages received/sent.
Echos	The number of ICMP Echo (request) messages received/sent.
Echo Replies	The number of ICMP Echo Reply messages received/sent.

Table 3-16 ICMP Statistics (Continued)

Parameter	Description
Timestamps	The number of ICMP Timestamp (request) messages received/sent.
Timestamp Replies	The number of ICMP Timestamp Reply messages received/sent.
Address Masks	The number of ICMP Address Mask Request messages received/sent.
Address Mask Replies	The number of ICMP Address Mask Reply messages received/sent.

Web - Click IP, Statistics, ICMP.

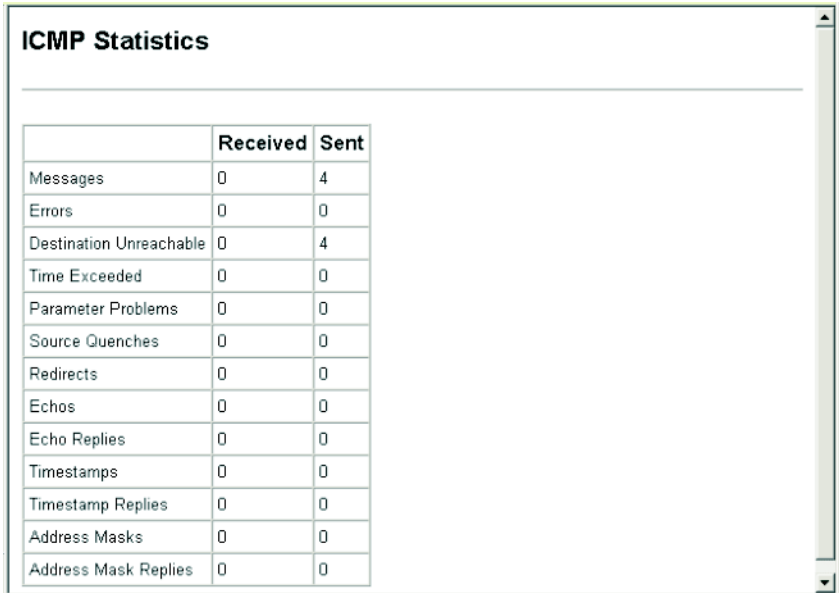

ICMP Statistics

	Received	Sent
Messages	0	4
Errors	0	0
Destination Unreachable	0	4
Time Exceeded	0	0
Parameter Problems	0	0
Source Quenches	0	0
Redirects	0	0
Echos	0	0
Echo Replies	0	0
Timestamps	0	0
Timestamp Replies	0	0
Address Masks	0	0
Address Mask Replies	0	0

Figure 3-116 ICMP Statistics

CLI - See the example on page 3-193.

3 Configuring the Switch


UDP Statistics

User Datagram Protocol (UDP) provides a datagram mode of packet-switched communications. It uses IP as the underlying transport mechanism, providing access to IP-like services. UDP packets are delivered just like IP packets – connection-less datagrams that may be discarded before reaching their targets. UDP is useful when TCP would be too complex, too slow, or just unnecessary.

Table 3-17 USP Statistics

Parameter	Description
Datagrams Received	The total number of UDP datagrams delivered to UDP users.
Datagrams Sent	The total number of UDP datagrams sent from this entity.
Receive Errors	The number of received UDP datagrams that could not be delivered for reasons other than the lack of an application at the destination port.
No Ports	The total number of received UDP datagrams for which there was no application at the destination port.

Web - Click IP, Statistics, UDP.

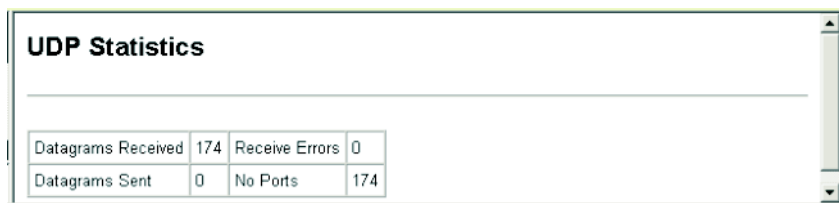

The screenshot shows a web interface titled "UDP Statistics". Below the title is a table with the following data:

Datagrams Received	174	Receive Errors	0
Datagrams Sent	0	No Ports	174

Figure 3-117 UDP Statistics

CLI - See the example on page 3-193.


TCP Statistics

The Transmission Control Protocol (TCP) provides highly reliable host-to-host connections in packet-switched networks, and is used in conjunction with IP to support a wide variety of Internet protocols.

Table 3-18 TCP Statistics

Parameter	Description
Segments Received	The total number of segments received, including those received in error. This count includes segments received on currently established connections.
Segments Sent	The total number of segments sent, including those on current connections but excluding those containing only retransmitted octets.
Active Opens	The number of times TCP connections have made a direct transition to the SYN-SENT state from the CLOSED state.
Failed Connection Attempts	The number of times TCP connections have made a direct transition to the CLOSED state from either the SYN-SENT state or the SYN-RCVD state, plus the number of times TCP connections have made a direct transition to the LISTEN state from the SYN-RCVD state.
Current Connections	The number of TCP connections for which the current state is either ESTABLISHED or CLOSE-WAIT.
Receive Errors	The total number of segments received in error (e.g., bad TCP checksums).
Segments Retransmitted	The total number of segments retransmitted - that is, the number of TCP segments transmitted containing one or more previously transmitted octets.
Passive Opens	The number of times TCP connections have made a direct transition to the SYN-RCVD state from the LISTEN state.
Reset Connections	The number of times TCP connections have made a direct transition to the CLOSED state from either the ESTABLISHED state or the CLOSE-WAIT state.

Web - Click IP, Statistics, TCP.

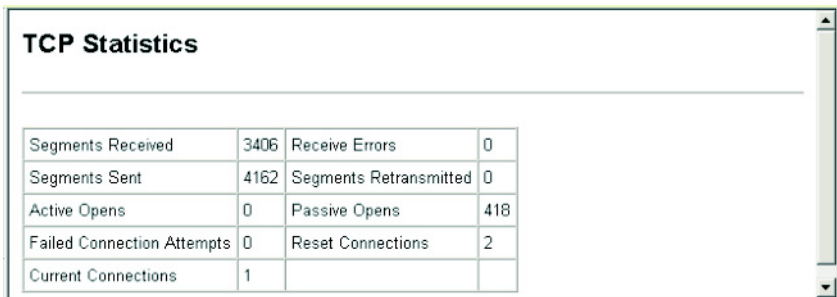

TCP Statistics							
Segments Received	3406	Receive Errors	0				
Segments Sent	4162	Segments Retransmitted	0				
Active Opens	0	Passive Opens	418				
Failed Connection Attempts	0	Reset Connections	2				
Current Connections	1						

Figure 3-118 TCP Statistics

CLI - See the example on page 3-193.

3 Configuring the Switch

Configuring Static Routes

This router can dynamically configure routes to other network segments using dynamic routing protocols (i.e., RIP or OSPF). However, you can also manually enter static routes in the routing table. Static routes may be required to access network segments where dynamic routing is not supported, or can be set to force the use of a specific route to a subnet, rather than using dynamic routing. Static routes do not automatically change in response to changes in network topology, so you should only configure a small number of stable routes to ensure network accessibility.

Command Attributes

- **Interface** – Index number of the IP interface.
- **IP Address** – IP address of the destination network, subnetwork, or host.
- **Netmask** – Network mask for the associated IP subnet. This mask identifies the host address bits used for routing to specific subnets.
- **Gateway** – IP address of the gateway used for this route.
- **Metric** – Cost for this interface. This cost is only used if a route is imported by a dynamic routing protocol such as OSPF. (Range: 1-5, default: 1)
- **Entry Count** – The number of table entries.

Web - Click IP, Routing, Static Routes.

Static Routes

Current:

Interface, IPAddress, Netmask, Nexthop, Metric
1, 0.0.0.0, 0.0.0.0, 10.1.0.254, 1

<< Add
Remove

Clear all static routes

Entry Count: 1

New:

IP Address	<input type="text"/>
Netmask	<input type="text"/>
Nexthop	<input type="text"/>
Metric	1 ▾

Figure 3-119 IP Static Routes

CLI - This example forwards all traffic for subnet 192.168.1.0 to the router 192.168.5.254, using the default metric of 1.

```
Console(config)#ip route 192.168.1.0 255.255.255.0 192.168.5.254 4-245
Console(config)#
```


Displaying the Routing Table

You can display all the routes that can be accessed via the local network interfaces, via static routes, or via a dynamically learned route. If route information is available through more than one of these methods, the priority for route selection is local, static, and then dynamic. Also note that the route for a local interface is not enabled (i.e., listed in the routing table) unless there is at least one active link connected to that interface.

Command Attributes

- **Interface** – Index number of the IP interface.
- **IP Address** – IP address of the destination network, subnetwork, or host. Note that the address 0.0.0.0 indicates the default gateway for this router.
- **Netmask** – Network mask for the associated IP subnet. This mask identifies the host address bits used for routing to specific subnets.
- **Next Hop** – The IP address of the next hop (or gateway) in this route.
- **Protocol** – The protocol which generated this route information. (Options: local, static, RIP, OSPF)
- **Metric** – Cost for this interface.
- **Entry Count** – The number of table entries.

Web - Click IP, Routing, Routing Table.

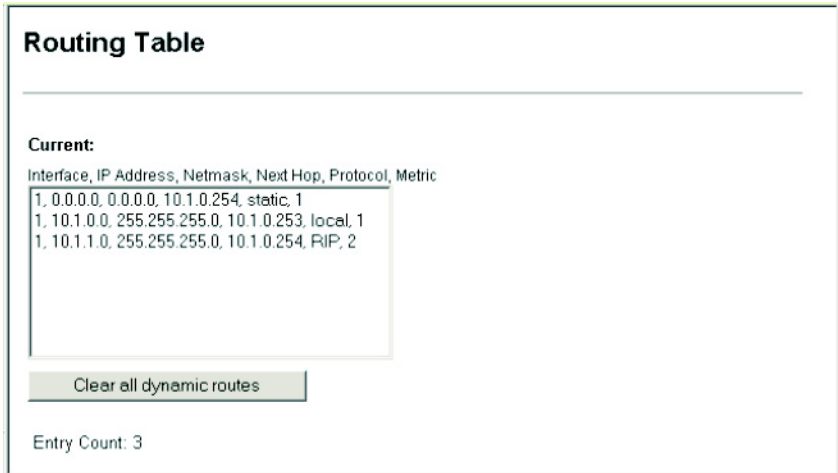

Routing Table

Current:

Interface	IP Address	Netmask	Next Hop	Protocol	Metric
1	0.0.0.0	0.0.0.0	10.1.0.254	static	1
1	10.1.0.0	255.255.255.0	10.1.0.253	local	1
1	10.1.1.0	255.255.255.0	10.1.0.254	RIP	2

Clear all dynamic routes

Entry Count: 3

Figure 3-120 IP Routing Table

3 Configuring the Switch

CLI - This example shows routes obtained from various methods.


```
Console#show ip route 4-246
```

Ip Address	Netmask	Next Hop	Protocol	Metric	Interface
0.0.0.0	0.0.0.0	10.1.0.254	static	1	1
10.1.0.0	255.255.255.0	10.1.0.253	local	1	1
10.1.1.0	255.255.255.0	10.1.0.254	RIP	2	1

```
Total entries: 3  
Console#
```

Configuring the Routing Information Protocol

The RIP protocol is the most widely used routing protocol. The RIP protocol uses a distance-vector-based approach to routing. Routes are determined on the basis of minimizing the distance vector, or hop count, which serves as a rough estimate of transmission cost. Each router broadcasts its advertisement every 30 seconds, together with any updates to its routing table. This allows all routers on the network to learn consistent tables of next hop links which lead to relevant subnets.

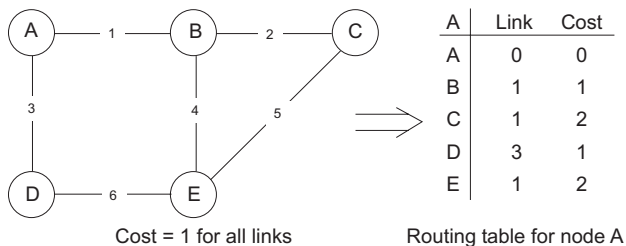

Command Usage

- Just as Layer 2 switches use the Spanning Tree Algorithm to prevent loops, routers also use methods for preventing loops that would cause endless retransmission of data traffic. RIP utilizes the following three methods to prevent loops from occurring:
 - Split horizon – Never propagate routes back to an interface port from which they have been acquired.
 - Poison reverse – Propagate routes back to an interface port from which they have been acquired, but set the distance-vector metrics to infinity. (This provides faster convergence.)
 - Triggered updates – Whenever a route gets changed, broadcast an update message after waiting for a short random delay, but without waiting for the periodic cycle.
- RIP-2 is a compatible upgrade to RIP. RIP-2 adds useful capabilities for plain text authentication, multiple independent RIP domains, variable length subnet masks, and multicast transmissions for route advertising (RFC 1723).
- There are several serious problems with RIP that you should consider. First of all, RIP (version 1) has no knowledge of subnets, both RIP versions can take a long time to converge on a new route after the failure of a link or router during which time

routing loops may occur, and its small hop count limitation of 15 restricts its use to smaller networks. Moreover, RIP (version 1) wastes valuable network bandwidth by propagating routing information via broadcasts; it also considers too few network variables to make the best routing decision.

Configuring General Protocol Settings

RIP is used to specify how routers exchange routing information. When RIP is enabled on this router, it sends RIP messages to all devices in the network every 30 seconds (by default), and updates its own routing table when RIP messages are received from other routers. To communicate properly with other routers using RIP, you need to specify the RIP version used globally by the router, as well as the RIP send and receive versions used on specific interfaces (page 3-206).

Command Usage

- When you specify a Global RIP Version, any VLAN interface not previously set to a specific Receive or Send Version (page 3-206) is set to the following values:
 - RIP Version 1 configures previously unset interfaces to send RIPv1 compatible protocol messages and receive either RIPv1 or RIPv2 protocol messages.
 - RIP Version 2 configures previously unset interfaces to use RIPv2 for both sending and receiving protocol messages.
- The *update* timer is the fundamental timer used to control all basic RIP processes.
 - Setting the update timer to a short interval can cause the router to spend an excessive amount of time processing updates. On the other hand, setting it to an excessively long time will make the routing protocol less sensitive to changes in the network configuration.
 - The timers must be set to the same values for all routers in the network.

Command Attributes

Global Settings


- **RIP Routing Process** – Enables RIP routing for all IP interfaces on the router. (Default: Disabled)
- **Global RIP Version** – Specifies a RIP version used globally by the router. (Default: RIP Version 1)

Timer Settings

- **Update** – Sets the rate at which updates are sent. This value will also set the timeout timer to 6 times the update time, and the garbage-collection timer to 4 times the update time. (Range: 15-60 seconds; Default: 30 seconds)
- **Timeout** – Sets the time after which there have been no update messages that a route is declared dead. The route is marked inaccessible (i.e., the metric set to infinite) and advertised as unreachable. However, packets are still forwarded on this route. (Default: 180 seconds)
- **Garbage Collection** – After the *timeout* interval expires, the router waits for an interval specified by the *garbage-collection* timer before removing this entry from the routing table. This timer allows neighbors to become aware of an invalid route prior to purging. (Default: 120 seconds)

3 Configuring the Switch

Web - Click Routing Protocol, RIP, General Settings. Enable or disable RIP, set the RIP version used on previously unset interfaces to RIPv1 or RIPv2, set the basic update timer, and then click Apply.

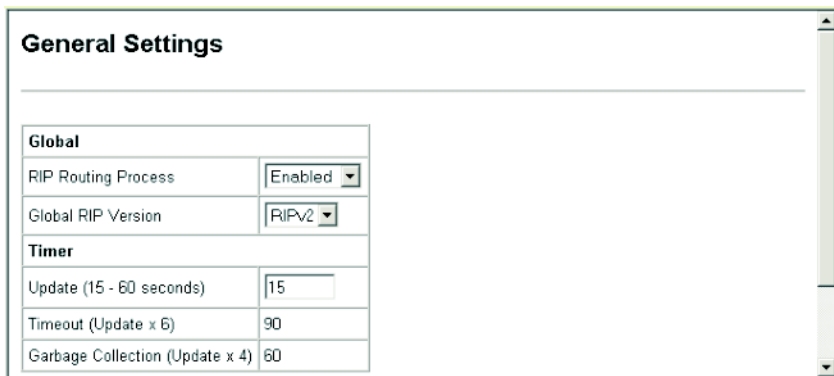

Global	
RIP Routing Process	Enabled
Global RIP Version	RIPv2
Timer	
Update (15 - 60 seconds)	15
Timeout (Update x 6)	90
Garbage Collection (Update x 4)	60

Figure 3-121 RIP General Settings

CLI - This example sets the router to use RIP Version 2, and sets the basic timer to 15 seconds.

```
Console(config)#router rip 4-249
Console(config-router)#version 2 4-252
Console(config-router)#timers basic 15 4-249
Console(config-router)#end
Console#show rip globals 4-257

RIP Process: Enabled
Update Time in Seconds: 15
Number of Route Change: 0
Number of Queries: 1
Console#
```

Specifying Network Interfaces for RIP

You must specify network interfaces that will be included in the RIP routing process.

Command Usage

- RIP only sends updates to interfaces specified by this command.
- Subnet addresses are interpreted as class A, B or C, based on the first field in the specified address. In other words, if a subnet address nnn.xxx.xxx.xxx is entered, the first field (nnn) determines the class:
 - 0 - 127 is class A, and only the first field in the network address is used.
 - 128 - 191 is class B, and the first two fields in the network address are used.
 - 192 - 223 is class C, and the first three fields in the network address are used.

Command Attributes

- **Subnet Address** – IP address of a network directly connected to this router.

Web - Click Routing Protocol, RIP, Network Addresses. Add all interfaces that will participate in RIP, and click Apply.

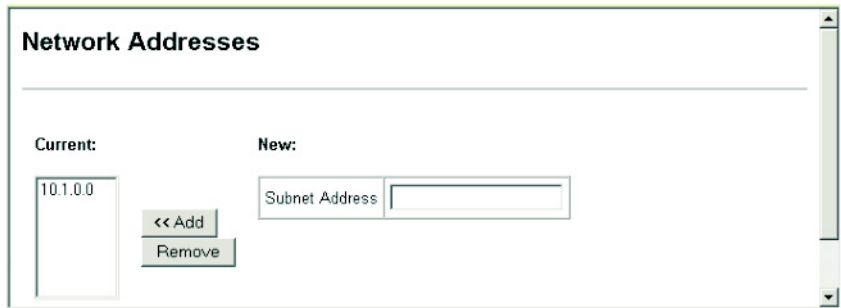


Figure 3-122 RIP Network Addresses

CLI - This example includes network interface 10.1.0.0 in the RIP routing process.

```

Console(config)#router-rip                               4-249
Console(config-router)#network 10.1.0.0                 4-250
Console(config-router)#end
Console#show ip rip status                               4-257

```

Peer	UpdateTime	Version	RcvBadPackets	RcvBadRoutes
10.1.0.253		0	0	73
10.1.1.253		0	0	66

```

Console#

```

Configuring Network Interfaces for RIP

For each interface that participates in the RIP routing process, you must specify the protocol message type accepted (i.e., RIP version) and the message type sent (i.e., RIP version or compatibility mode), the method for preventing loopback of protocol messages, and whether or not authentication is used (i.e., authentication only applies if RIPv2 messages are being sent or received).

Command Usage

Specifying Receive and Send Protocol Types

- Setting the RIP Receive Version or Send Version for an interface overrides the global setting specified by the RIP / General Settings, Global RIP Version field.
- You can specify the Receive Version based on these options:
 - Use "RIPv1" or "RIPv2" if all routers in the local network are based on RIPv1 or RIPv2, respectively.
 - Use "RIPv1 or RIPv2" if some routers in the local network are using RIPv2, but there are still some older routers using RIPv1.
 - Use "Do Not Receive" if you do not want to add any dynamic entries to the routing table for an interface. (For example, you may only want to allow static routes for a specific interface.)
- You can specify the Send Version based on these options:
 - Use "RIPv1" or "RIPv2" if all routers in the local network are based on RIPv1 or RIPv2, respectively.
 - Use "RIPv1 Compatible" to propagate route information by broadcasting to other routers on the network using the RIPv2 advertisement list, instead of multicasting as normally required by RIPv2. (Using this mode allows RIPv1 routers to receive these protocol messages, but still allows RIPv2 routers to receive the additional information provided by RIPv2, including subnet mask, next hop and authentication information.)
 - Use "Do Not Send" to passively monitor route information advertised by other routers attached to the network.

Loopback Prevention

Just as Layer 2 switches use the Spanning Tree Algorithm to prevent loops, routers also use methods for preventing loops that would cause endless retransmission of data traffic. When protocol packets are caught in a loop, links will be congested, and protocol packets may be lost. However, the network will slowly converge to the new state. RIP utilizes the following three methods that can provide faster convergence when the network topology changes and prevent most loops from occurring:

- Split Horizon – Never propagate routes back to an interface port from which they have been acquired.
- Poison Reverse – Propagate routes back to an interface port from which they have been acquired, but set the distance-vector metrics to infinity. (This provides faster convergence.)
- Triggered Updates – Whenever a route gets changed, broadcast an update message after waiting for a short random delay, but without waiting for the periodic cycle.

Protocol Message Authentication

RIPv1 is not a secure protocol. Any device sending protocol messages from UDP port 520 will be considered a router by its neighbors. Malicious or unwanted protocol messages can be easily propagated throughout the network if no authentication is required. RIPv2 supports authentication via a simple password. When a router is configured to exchange authentication messages, it will insert the password into all transmitted protocol packets, and check all received packets to ensure that they contain the authorized password. If any incoming protocol messages do not contain the correct password, they are simply dropped.


Command Attributes

- **VLAN** – ID of configured VLAN (1-4094).
- **Receive Version** – The RIP version to receive on an interface.
 - **RIPv1**: Accepts only RIPv1 packets.
 - **RIPv2**: Accepts only RIPv2 packets.
 - **RIPv1 or RIPv2**: Accepts RIPv1 or RIPv2 packets. (Default)
 - **Do Not Receive**: Does not accept incoming RIP packets.
(The default depends on the setting specified under RIP / General Settings, Global RIP Version: RIPv1 - RIPv1 or RIPv2 packets, RIPv2 - RIPv2 packets)
- **Send Version** – The RIP version to send on an interface.
 - **RIPv1**: Sends only RIPv1 packets.
 - **RIPv2**: Sends only RIPv2 packets.
 - **RIPv1 Compatible**: Route information is broadcast to other routers with RIPv2. (Default)
 - **Do Not Send**: Does not transmit RIP updates.
(The default depends on the setting specified under RIP / General Settings, Global RIP Version: RIPv1 - RIPv1 Compatible, RIPv2 - RIPv2 packets)
- **Instability Preventing** – Specifies the method used to reduce the convergence time when the network topology changes, and to prevent RIP protocol messages from looping back to the source router. (Default: Split Horizon)
 - **None**: No method is used. If a loop occurs, the hop count for a route may be gradually incremented to infinity (i.e., 16) before the route is deemed unreachable.
 - **Split Horizon**: This method never propagates routes back to an interface from which they have been acquired.
 - **Poison Reverse**: This method propagates routes back to an interface port from which they have been acquired, but set the distance-vector metrics to infinity. (This provides faster convergence.)
- **Authentication Type** – Specifies whether or not authentication is required for exchanging protocol messages. (Default: No Authentication)
 - **No Authentication**: No authentication is required.
 - **Simple Password**: Requires the interface to exchange routing information with other routers based on an authorized password. (Note that authentication only applies to RIPv2.)

3 Configuring the Switch

- **Authentication Key** – Specifies the key to use for authenticating RIPv2 packets. For authentication to function properly, both the sending and receiving interface must use the same password. (Range: 1-16 characters, case sensitive)

Web - Click Routing Protocol, RIP, Interface Settings. Select the RIP protocol message types that will be received and sent, the method used to provide faster convergence and prevent loopback (i.e., prevent instability in the network topology), and the authentication option and corresponding password. Then click Apply.

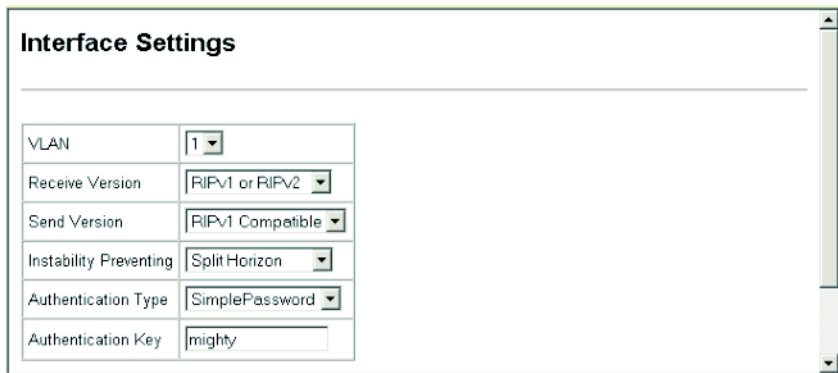

Interface Settings	
VLAN	1
Receive Version	RIPv1 or RIPv2
Send Version	RIPv1 Compatible
Instability Preventing	Split Horizon
Authentication Type	SimplePassword
Authentication Key	mighty

Figure 3-123 RIP Interface Settings

CLI - This example sets the receive version to accept both RIPv1 or RIPv2 messages, the send mode to RIPv1 compatible (i.e., called v2-broadcast in the CLI), sets the method of preventing instability in the network topology to Split Horizon, enables authentication via a simple password (i.e., called text mode in the CLI).

```
Console(config)#interface vlan 1                               4-149
Console(config-if)#ip rip receive version 1 2                 4-253
Console(config-if)#ip rip send version v2-broadcast           4-254
Console(config-if)#ip split-horizon                           4-255
Console(config-if)#ip rip authentication mode text            4-256
Console(config-if)#ip rip authentication key mighty           4-255
Console#
```

Displaying RIP Information and Statistics

You can display basic information about the current global configuration settings for RIP, statistics about route changes and queries, information about the interfaces on this router that are using RIP, and information about known RIP peer devices.

Table 3-19 RIP Information and Statistics

Parameter	Description
<i>Globals</i>	
RIP Routing Process	Indicates if RIP has been enabled or disabled.
Update Time in Seconds	The interval at which RIP advertises known route information. (Default: 30 seconds)
Number of Route Changes	Number of times routing information has changed.
Number of Queries	Number of router database queries received by this router.
<i>Interface Information</i>	
Interface	IP address of the interface.
SendMode	RIP version sent on this interface (none, RIPv1, RIPv2, rip1Compatible).
ReceiveMode	RIP version received on this interface (none, RIPv1, RIPv2, RIPv1Orv2).
InstabilityPreventing	Shows if split-horizon, poison-reverse, or no instability prevention method is in use.
AuthType	Shows if authentication is set to simple password or none.
RcvBadPackets	Number of bad RIP packets received.
RcvBadRoutes	Number of bad routes received.
SendUpdates	Number of route changes.
<i>Peer Information</i>	
PeerAddress	IP address of a neighboring RIP router.
UpdateTime	Last time a route update was received from this peer.
Version	Whether RIPv1 or RIPv2 packets were received from this peer.
RcvBadPackets	Number of bad RIP packets received from this peer.
RcvBadRoutes	Number of bad routes received from this peer.

3 Configuring the Switch

Web - Click Routing Protocol, RIP, Statistics.

RIP Statistics

Globals

RIP Routing Process	Enabled
Update Time in Seconds	30
Number of Route Changes	4
Number of Queries	0

Interface Information

Interface	SendMode	ReceiveMode	InstabilityPreventing	AuthType	RcvBadPackets	RcvBadRoutes	SendUpdates
10.1.0.253. rip1Compatible, RIPv1Orv2, SplitHorizon, noAuthentication, 0, 0, 60							
10.1.1.253. rip1Compatible, RIPv1Orv2, SplitHorizon, noAuthentication, 0, 0, 60							

Peer Information

PeerAddress	UpdateTime	Version	RcvBadPackets	RcvBadRoutes
10.1.0.254, 4093, 2, 0, 14lu				
10.1.1.254, 4093, 2, 0, 14lu				

Figure 3-124 RIP Statistics

CLI - The information displayed by the RIP Statistics screen via the web interface can be accessed from the CLI using the following commands.

```


Console#show rip globals                                     4-257
RIP Process: Enabled
Update Time in Seconds: 30
Number of Route Change: 4
Number of Queries: 0
Console#show ip rip configuration                          4-257
      Interface      SendMode      ReceiveMode      Poison      Authentication
-----
      10.1.0.253     rip1Compatible  RIPv1Orv2       SplitHorizon noAuthentication
      10.1.1.253     rip1Compatible  RIPv1Orv2       SplitHorizon noAuthentication
Console#show ip rip status                                4-257
      Interface      RcvBadPackets  RcvBadRoutes      SendUpdates
-----
      10.1.0.253     0              0                  60
      10.1.1.253     0              0                  63
Console#show ip rip peer                                  4-257
      Peer      UpdateTime      Version      RcvBadPackets      RcvBadRoutes
-----
      10.1.0.254      4610           2            0                   0
      10.1.1.254      4610           2            0                   0
Console#

```

Configuring the Open Shortest Path First Protocol

Open Shortest Path First (OSPF) is more suited for large area networks which experience frequent changes in the links. It also handles subnets much better than RIP. OSPF protocol actively tests the status of each link to its neighbors to generate a shortest path tree, and builds a routing table based on this information. OSPF then utilizes IP multicast to propagate routing information. A separate routing area scheme is also used to further reduce the amount of routing traffic.

Note: The OSPF protocol implemented in this device is based on Version 2 (RFC 2328). It also supports Version 1 (RFC 1583) compatibility mode to ensure that the same method is used to calculate summary route costs throughout the network when older OSPF routers exist; as well as the not-so-stubby area option (RFC 1587).

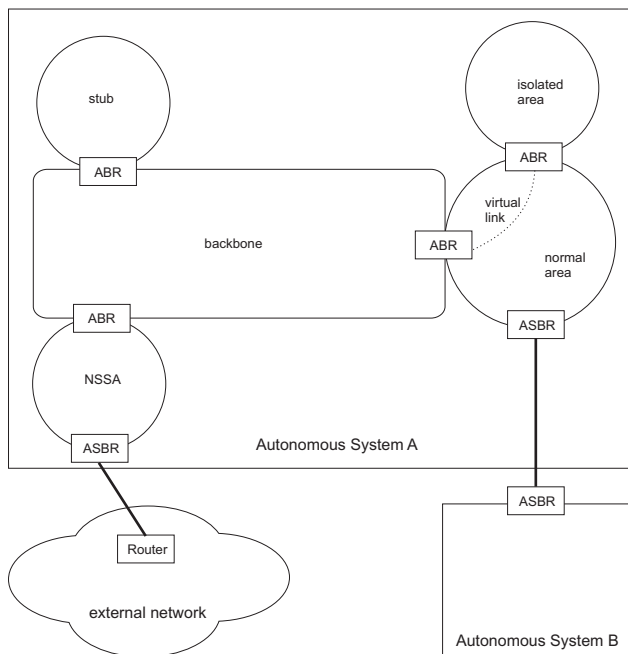

Command Usage

- OSPF looks at more than just the simple hop count. When adding the shortest path to any node into the tree, the optimal path is chosen on the basis of delay, throughput and connectivity. OSPF utilizes IP multicast to reduce the amount of routing traffic required when sending or receiving routing path updates. The separate routing area scheme used by OSPF further reduces the amount of routing traffic, and thus inherently provides another level of routing protection. In addition, all routing protocol exchanges can be authenticated. Finally, the OSPF algorithms have been tailored for efficient operation in TCP/IP Internets.

- OSPFv2 is a compatible upgrade to OSPF. It involves enhancements to protocol message authentication, and the addition of a point-to-multipoint interface which allows OSPF to run over non-broadcast networks, as well as support for overlapping area ranges.
- When using OSPF, you must organize your network (i.e., autonomous system) into normal, stub, or not-so-stubby areas; configure the ranges of subnet addresses that can be aggregated by link state advertisements; and configure virtual links for areas that do not have direct physical access to the OSPF backbone.
 - To implement OSPF for a large network, you must first organize the network into logical areas to limit the number of OSPF routers that actively exchange Link State Advertisements (LSAs). You can then define an OSPF interface by assigning an IP interface configured on this router to one of these areas. This OSPF interface will send and receive OSPF traffic to neighboring OSPF routers.
 - You can further optimize the exchange of OSPF traffic by specifying an area range that covers a large number of subnetwork addresses. This is an important technique for limiting the amount of traffic exchanged between Area Border Routers (ABRs).
 - And finally, you must specify a virtual link to any OSPF area that is not physically attached to the OSPF backbone. Virtual links can also be used to provide a redundant link between contiguous areas to prevent areas from being partitioned, or to merge backbone areas.


Configuring General Protocol Settings

To implement dynamic OSPF routing, first assign VLAN groups to each IP subnet to which this router will be attached, then use the OSPF / General Configuration menu to enable OSPF, assign an Router ID to this device, and set the other basic protocol parameters.

Command Attributes

General Information –


- **OSPF Routing Process** – Enables or disables OSPF routing for all IP interfaces on the router. (Default: Disabled)
- **OSPF Router ID** – Assigns a unique router ID for this device within the autonomous system. (Default: The lowest interface address)
- **Version Number**²⁴ – This router only supports OSPF Version 2.
- **Area Border Router**²⁴ – Indicates if this router connect directly to networks in two or more areas. An area border router runs a separate copy of the Shortest Path First algorithm, maintaining a separate routing database for each area.

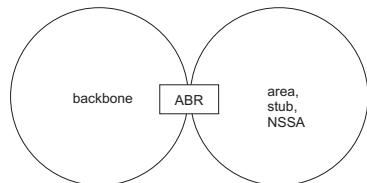

24. These items are read only.

3 Configuring the Switch

- **AS Boundary Router**²⁵ – Allows this router to exchange routing information with boundary routers in other autonomous systems to which it may be attached. If a router is enabled as an ASBR, then every other router in the autonomous system can learn about external routes from this device. (Default: Disabled)

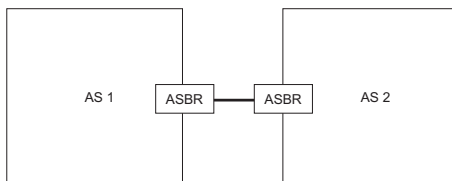

- **Rfc1583 Compatible** – If one or more routers in a routing domain are using OSPF Version 1, this router should use RFC 1583 (OSPFv1) compatibility mode to ensure that all routers are using the same RFC for calculating summary route costs. Enable this field to force the router to calculate summary route costs using RFC 1583. (Default: Disabled)
- **SPF Hold Time (seconds)** – The hold time between making two consecutive shortest path first (SPF) calculations. (Range: 0-65535; Default: 10)
- **Area Numbers**²⁴ – The number of OSPF areas configured on this router.

Default Route Information –

- **Originate Default Route**²⁵ – Generates a default external route into an autonomous system. Note that the **AS Boundary Router** field must be enabled, and the **Advertise Default Route** field properly configured. (Default: Disabled)
- **Advertise Default Route**²⁵ – The router can advertise a default external route into the autonomous system (AS). (Options: NotAlways, Always; Default: NotAlways)
 - **Always** – The router will advertise itself as a default external route for the AS, even if a default external route does not actually exist.
 - **NotAlways** – It can only advertise a default external route into the AS if it has been configured to import external routes via RIP or static configuration, and such a route is known. (See “Redistributing External Routes” on page 3-231.)
- **External Metric Type**²⁵ – The external link type used to advertise the default route. Type 1 route advertisements add the internal cost to the external route metric. Type 2 routes do not add the internal cost metric. When comparing Type 2 routes, the internal cost is only used as a tie-breaker if several Type 2 routes have the same cost. (Default: Type 2)
- **Default External Metric**²⁵ – The Metric assigned to the default route. (Range: 1-65535; Default: 10)

25. CLI - These are configured with the **default-information originate** command (page 4-262).

Web - Click Routing Protocol, OSPF, General Configuration. Enable OSPF, specify the Router ID, configure the other global parameters as required, and click Apply.

General Configuration

General Information:

OSPF Routing Process	Enabled ▾
OSPF Router ID	10.1.1.253
Version Number	Version 2
Area Border Router	Yes
AS Boundary Router	Enabled ▾
RFC1583 Compatible	Disabled ▾
SPF Hold Time (0 - 65535 seconds)	10
Area Numbers	3

Default Information:

Originate Default Route	Enabled ▾
Advertise Default Route	Always ▾
External Metric Type	Type2 ▾
Default External Metric (0 - 16777215)	10

Figure 3-125 OSPF General Configuration

CLI - This example configures the router with the same settings as shown in the screen capture for the web interface.

```


Console(config)#router ospf                               4-260
Console(config-router)#router-id 10.1.1.253              4-260
Console(config-router)#no compatible rfc1583             4-261
Console(config-router)#default-information originate      4-262
    metric 10 metric-type 2                               4-263
Console(config-router)#timers spf 10                     4-263
Console(config-router)#
```

3 Configuring the Switch


Configuring OSPF Areas

An autonomous system must be configured with a backbone area, designated by area identifier 0.0.0.0. By default, all other areas are created as normal transit areas. Routers in a normal area may import or export routing information about individual nodes. To reduce the amount of routing traffic flooded onto the network, you can configure an area to export a single summarized route that covers a broad range of network addresses within the area (page 3-219). To further reduce the amount of routes passed between areas, you can configure an area as a stub or a not-so-stubby area (NSSA).

Normal Area – A large OSPF domain should be broken up into several areas to increase network stability and reduce the amount of routing traffic required through the use of route summaries that aggregate a range of addresses into a single route. The backbone or any normal area can pass traffic between other areas, and are therefore known as transit areas. Each router in an area has identical routing tables. These tables may include area links, summarized links, or external links that depict the topology of the autonomous system.




Stub – A stub does not accept external routing information. Instead, an area border router adjacent to a stub can be configured to send a default external route into the stub for all destinations outside the local area or the autonomous system. This route will also be advertised as a single entry point for traffic entering the stub. Using a stub can significantly reduce the amount of topology data that has to be exchanged over the network.



- By default, a stub can only pass traffic to other areas in the autonomous system via the default external route. However, you also can configure an area border router to send Type 3 summary link advertisements into the stub.

NSSA – A not-so-stubby area (NSSA) is similar to a stub. It blocks most external routing information, and can be configured to advertise a single default route for traffic passing between the NSSA and other areas within the autonomous system (AS). However, an NSSA can also import external routes from one or more small routing domains that are not part of the AS, such as a RIP domain or locally configured static routes. This external AS routing information is generated by the NSSA's ASBR and advertised only within the NSSA. By default, these routes are not flooded onto the backbone or into any other area by area border routers. However, the NSSA's ABRs will convert NSSA external LSAs (Type 7) into external LSAs (Type-5) which are propagated into other areas within the AS.

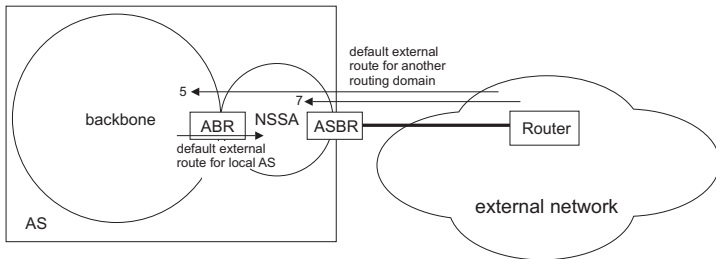

- Routes that can be advertised with NSSA external LSAs include network destinations outside the AS learned via OSPF, the default route, static routes, routes derived from other routing protocols such as RIP, or directly connected networks that are not running OSPF.
- Also, note that unlike stub areas, all Type-3 summary LSAs are always imported into NSSAs to ensure that internal routes are always chosen over Type-7 NSSA external routes.

Default Cost – This specifies a cost for the default summary route sent into a stub or not-so-stubby area (NSSA) from an Area Border Router (ABR).

Command Usage

- Before you create a stub or NSSA, first specify the address range for an area using the Network Area Address Configuration screen (page 3-227).
- Stubs and NSSAs cannot be used as a transit area, and should therefore be placed at the edge of the routing domain.
- A stub or NSSA can have multiple ABRs or exit points. However, all of the exit points and local routers must contain the same external routing data so that the exit point does not need to be determined for each external destination.

Command Attributes

- **Area ID** – Identifier for an area, stub or NSSA.
- **Area Type** – Specifies a normal area, stub area, or not-so-stubby area (NSSA). Area ID 0.0.0.0 is set to the backbone by default. (Default: Normal area)
- **Default Cost** – Cost for the default summary route sent into a stub from an area border router (ABR). (Range: 0-16777215; Default: 1)
 - Note that if you set the default cost to “0,” the router will not advertise a default route into the attached stub.
- **Summary** – Makes an ABR send a Type-3 summary link advertisement into a stub. (Default: Summary)
 - A stub is designed to save routing table space by blocking Type-4 AS summary LSAs and Type 5 external LSAs. If you use the “NoSummary” option to also block Type-3 summary LSAs that advertise the default route for destinations external to the local area or the AS, the stub will become completely isolated.

Note: This router supports up to 16 total areas (either normal transit areas, stubs, or NSSAs).

3 Configuring the Switch

Web - Click Routing Protocol, OSPF, Area Configuration. Set any area to a stub or NSSA as required, specify the cost for the default summary route sent into a stub, and click Apply.

Area Configuration

Current Area Configuration:

Area ID	Area Type	Default Cost	Summary	Remove
0.0.0.0	Backbone			
0.0.0.1				<input type="checkbox"/>
0.0.0.2	Stub	10	Summary	<input type="checkbox"/>
0.0.0.3	NSSA			<input type="checkbox"/>

Entry Count: 4 Remove

Area Configuration Settings:

Area ID	<input type="text"/>
Area Type	Normal ▾
Default Cost (0 - 16777215)	<input type="text"/>
Summary	Summary ▾
Set	

Figure 3-126 OSPF Area Configuration

CLI - This example configures area 0.0.0.1 as a normal area, area 0.0.0.2 as a stub, and area 0.0.0.3 as an NSSA. It also configures the router to propagate a default summary route into the stub and sets the cost for this default route to 10.

```
Console(config-router)#network 10.1.1.0 255.255.255.0 area 0.0.0.1 4-267
Console(config-router)#area 0.0.0.2 stub summary 4-268
Console(config-router)#area 0.0.0.2 default-cost 10 4-264
Console(config-router)#area 0.0.0.3 nssa 4-269
Console(config-router)#end
```



```

Console#show ip ospf
Routing Process with ID 192.168.1.253
Supports only single TOS(TOS0) route
Number of area in this router is 3
Area 0.0.0.0 (BACKBONE)
    Number of interfaces in this area is 1
    SPF algorithm executed 40 times
Area 0.0.0.2 (STUB)
    Number of interfaces in this area is 1
    SPF algorithm executed 8 times
Area 0.0.0.3 (NSSA)
    Number of interfaces in this area is 1
    SPF algorithm executed 40 times
Console#

```


4-278

Configuring Area Ranges (Route Summarization for ABRs)

An OSPF area can include a large number of nodes.

If the Area Border Router (ABR) has to advertise route information for each of these nodes, this wastes a lot of bandwidth and processor time.

Instead, you can configure an ABR to advertise a single summary route that covers all the individual networks within its area. When using route summaries, local changes do not have to be propagated to other area routers. This allows OSPF to be easily scaled for larger networks, and provides a more stable network topology.



Command Usage

- Use the Area Range Configuration page to summarize the routes for an area. The summary route for an area is defined by an IP address and network mask. You therefore need to structure each area with a contiguous set of addresses so that all routes in the area fall within an easily specified range. This router also supports Variable Length Subnet Masks (VLSMs), so you can summarize an address range on any bit boundary in a network address.
- To summarize the external LSAs imported into your autonomous system (i.e., local routing domain), use the Summary Address Configuration screen (page 3-230).

Command Attributes

- **Area ID** – Identifies an area for which the routes are summarized. (The area ID must be in the form of an IP address.)
- **Range Network** – Base address for the routes to summarize.
- **Range Netmask** – Network mask for the summary route.
- **Advertising** – Indicates whether or not to advertise the summary route. If the summary is not sent, the routes remain hidden from the rest of the network. (Default: Advertise)

Note: This router supports up to 64 summary routes for area ranges.

3 Configuring the Switch

Web - Click Routing Protocol, OSPF, Area Range Configuration. Specify the area identifier, the base address and network mask, select whether or not to advertise the summary route to other areas, and then click Apply.

Area Range Configuration

Current Area Range Entries:

Area ID	Range Network	Range Netmask	Advertising	Remove
0.0.0.1	10.1.1.0	255.255.255.0	Advertise ▾	<input type="checkbox"/>

Entry Count: 1 Remove

Area Range Settings:

Area ID	<input type="text"/>	Range Network	<input type="text"/>
Advertising	Advertise ▾	Range Netmask	<input type="text"/>
Set			

Figure 3-127 OSPF Range Configuration

CLI - This example summarizes all the routes for area 1. Note that the default for the **area range** command is to advertise the route summary. The configured summary route is shown in the list of information displayed for area 1.

```
Console(config-router)#area 0.0.0.1 range 10.1.1.0 255.255.255.0 4-267
Console(config-router)#end
Console#show ip ospf
Routing Process with ID 10.1.1.253
Supports only single TOS(TOS0) route
Number of area in this router is 4
Area 0.0.0.0 (BACKBONE)
  Number of interfaces in this area is 0
  SPF algorithm executed 47 times
Area 0.0.0.1
  Number of interfaces in this area is 3
  SPF algorithm executed 14 times
  Area ranges are
    255.255.255.0/24 Active
Console#
```

Configuring OSPF Interfaces

You should specify a routing interface for any local subnet that needs to communicate with other network segments located on this router or elsewhere in the network. First configure a VLAN for each subnet that will be directly connected to this router, assign IP interfaces to each VLAN (i.e., one primary interface and one or more secondary interfaces), and then use the OSPF / Network Area Address Configuration page to assign an interface address range to an OSPF area.

After assigning a routing interface to an OSPF area, you need to use the OSPF / Interface Configuration page to configure the interface-specific parameters used by OSPF to select the designated router, control the timing of link state advertisements, set the cost used to select preferred paths, and specify the method used to authenticate routing messages.

Field Attributes

OSPF Interface List

- **VLAN ID** – The VLAN to which an IP interface has been assigned.
- **Interface IP** – The IP interface associated with the selected VLAN.
- **Area ID** – The area to which this interface has been assigned.
- **Designated Router** – Designated router for this area.
- **Backup Designated Router** – Designated backup router for this area.
- **Entry Count** – The number of IP interfaces assigned to this VLAN.

Note: This router supports up to 64 OSPF interfaces.

Detail Interface Configuration

- **VLAN ID** – The VLAN corresponding to the selected interface.
- **Rtr Priority** – Sets the interface priority for this router. (Range: 0-255; Default: 1)
 - A designated router (DR) and backup designated router (BDR) is elected for each OSPF area based on Router Priority. The DR forms an active adjacency to all other routers in the area to exchange routing topology information. If for any reason the DR fails, the BDR takes over this role.
 - The router with the highest priority becomes the DR and the router with the next highest priority becomes the BDR. If two or more routers are set to the same priority, the router with the higher ID will be elected. You can set the priority to zero to prevent a router from being elected as a DR or BDR.
 - If a DR already exists for an area when this interface comes up, the new router will accept the current DR regardless of its own priority. The DR will not change until the next time the election process is initiated.
- **Transmit Delay** – Sets the estimated time to send a link-state update packet over an interface. (Range: 1-65535 seconds; Default: 1)
 - LSAs have their age incremented by a delay before transmission. You should consider both the transmission and propagation delays for an interface when estimating this delay. Set the transmit delay according to link speed, using larger values for lower-speed links.
 - The transmit delay must be the same for all routers in an autonomous system.

3 Configuring the Switch

- On slow links, the router may send packets more quickly than devices can receive them. To avoid this problem, you can use the transmit delay to force the router to wait a specified interval between transmissions.
- **Retransmit Interval** – Sets the time between resending link-state advertisements. (Range: 1-65535 seconds; Default: 1)
 - A router will resend an LSA to a neighbor if it receives no acknowledgment. The retransmit interval should be set to a conservative value that provides an adequate flow of routing information, but does not produce unnecessary protocol traffic. Note that this value should be larger for virtual links.
 - Set this interval to a value that is greater than the round-trip delay between any two routers on the attached network to avoid unnecessary retransmissions.
- **Hello Interval** – Sets the interval between sending hello packets on an interface. (Range: 1-65535 seconds; Default: 10)
 - This interval must be set to the same value for all routers on the network.
 - Using a smaller Hello interval allows changes in the network topology to be discovered more quickly, but may result in more routing traffic.
- **Rtr Dead Interval** – Sets the interval at which hello packets are not seen before neighbors declare the router down. This interval must be set to the same value for all routers on the network. (Range: 1-65535 seconds; Default: 40, or 4 times the Hello Interval)
- **Cost** – Sets the cost of sending a packet on an interface, where higher values indicate slower ports. (Range: 1-65535; Default: 1)
 - This router uses a default cost of 1 for all ports. Therefore, if you install a Gigabit module, you need to reset the cost for all of the 100 Mbps ports to some value greater than 1.
 - Routes are subsequently assigned a metric equal to the sum of all metrics for each interface link in the route.
- **Authentication Type** – Specifies the authentication type used for an interface. (Options: None, Simple password, MD5; Default: None)
 - Use authentication to prevent routers from inadvertently joining an unauthorized area. Configure routers in the same area with the same password or key.
 - When using simple password authentication, a password is included in the packet. If it does not match the password configured on the receiving router, the packet is discarded. This method provides very little security as it is possible to learn the authentication key by snooping on routing protocol packets.
 - When using Message-Digest 5 (MD5) authentication, the router uses the MD5 algorithm to verify data integrity by creating a 128-bit message digest from the authentication key. Without the proper key and key-id, it is nearly impossible to produce any message that matches the prespecified target message digest.
 - The Authentication Key and Message Digest Key-id must be used consistently throughout the autonomous system. (Note that the Message Digest Key-id field is disabled when this authentication type is selected.)
- **Authentication Key** – Assign a plain-text password used by neighboring routers to verify the authenticity of routing protocol messages. (Range: 1-8 characters for simple password or 1-16 characters for MD5 authentication; Default: no key)

- You can assign a unique password to each network (i.e., autonomous system) to improve the security of the routing database. However, the password must be used consistently on all neighboring routers throughout a network.
- **Message Digest Key-id** – Assigns a key-id used in conjunction with the authentication key to verify the authenticity of routing protocol messages sent to neighboring routers. (Range: 1-255; Default: none)
 - Normally, only one key is used per interface to generate authentication information for outbound packets and to authenticate incoming packets. Neighbor routers must use the same key identifier and key value.
 - When changing to a new key, the router will send multiple copies of all protocol messages, one with the old key and another with the new key. Once all the neighboring routers start sending protocol messages back to this router with the new key, the router will stop using the old key. This rollover process gives the network administrator time to update all the routers on the network without affecting the network connectivity. Once all the network routers have been updated with the new key, the old key should be removed for security reasons.

Web - Click Routing Protocol, OSPF, Interface Configuration. Select the required interface from the scroll-down box, and click Detailed Settings.

Interface Configuration

OSPF Interface List of VLAN ID :

Interface IP	Area ID	Designated Router	Backup Designated Router
10.1.1.252	0.0.0.0	10.1.1.253	10.1.1.252

Entry Count: 1

Figure 3-128 OSPF Interface Configuration

3 Configuring the Switch

Change any of the interface-specific protocol parameters, and then click Apply.

Detailed Interface Configuration

VLAN ID	1
Rtr Priority (0 - 255)	5
Transmit Delay (0 - 3600 seconds)	6
Retransmit Interval (0 - 3600 seconds)	7
Hello Interval (1 - 65535 seconds)	5
Rtr Dead Interval (0 - 65535 seconds)	50
Cost (0 - 65535)	10
Authentication Type	MD 5
Authentication Key	aiebel
Message Digest Key-id (0 - 255)	1


Figure 3-129 OSPF Interface Configuration - Detailed

CLI - This example configures the interface parameters for VLAN 1.

```
Console(config)#interface vlan 1
Console(config-if)#ip ospf priority 5                               4-276
Console(config-if)#ip ospf transmit-delay 6                       4-278
Console(config-if)#ip ospf retransmit-interval 7                  4-277
Console(config-if)#ip ospf hello-interval 5                       4-276
Console(config-if)#ip ospf dead-interval 50                       4-275
Console(config-if)#ip ospf cost 10                                4-275
Console(config-if)#ip ospf authentication message-digest          4-272
Console(config-if)#ip ospf message-digest-key 1 md5 aiebel        4-274
Console#
```

Configuring Virtual Links

All OSPF areas must connect to the backbone. If an area does not have a direct physical connection to the backbone, you can configure a virtual link that provides a logical path to the backbone. To connect an isolated area to the backbone, the logical path can cross a single non-backbone area (i.e., transit area) to reach the backbone. To define this path, you must configure an ABR that serves as an endpoint connecting the isolated area to the common transit area, and specify a neighboring ABR as the other endpoint connecting the common transit area to the backbone itself. (Note that you cannot configure a virtual link that runs through a stub or NSSA area.)

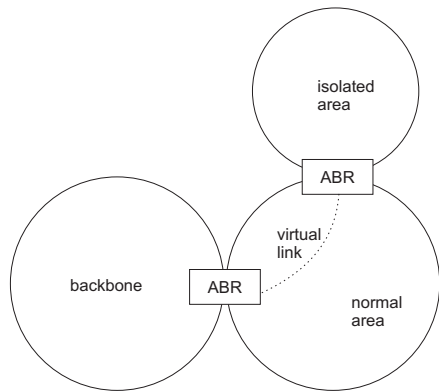

Virtual links can also be used to create a redundant link between any area and the backbone to help prevent partitioning, or to connect two existing backbone areas into a common backbone.

Command Attributes

- **Area ID** – Identifies the transit area for the virtual link. (The area ID must be in the form of an IP address.)
- **Neighbor Router ID** – Neighbor router at other end of the virtual link. This must be an Area Border Router (ABR) that is adjacent to both the backbone and the transit area for the virtual link.
- **Events** – The number of state changes or error events on this virtual link.

The other items are described under “Configuring OSPF Interfaces,” page 3-221.

Note: This router supports up to 64 virtual links.

3 Configuring the Switch

Web - Click Routing Protocol, OSPF, Virtual Link Configuration. To create a new virtual link, specify the Area ID and Neighbor Router ID, configure the link attributes, and click Add. To modify the settings for an existing link, click the Detail button for the required entry, modify the link settings, and click Set.

Virtual Link Configuration

Current Virtual Link Entries:

Area ID	Neighbor Router ID	Detail Setting	Remove
0.0.0.4	10.1.1.252	<input type="button" value="Detail"/>	<input type="checkbox"/>

Entry Count: 1

Virtual Link Settings:

Area ID	<input type="text"/>
Neighbor Router ID	<input type="text"/>
Transmit Delay (0 - 3600 seconds)	<input type="text" value="1"/>
Retransmit Interval (0 - 3600 seconds)	<input type="text" value="5"/>
Hello Interval (1 - 65535 seconds)	<input type="text" value="10"/>
Rtr Dead Interval (0 - 2147483647 seconds)	<input type="text" value="40"/>
Authentication Type	<input type="text" value="Null"/>
Authentication Key	<input type="text"/>
Message Digest Key-id (0 - 255)	<input type="text"/>

Figure 3-130 OSPF Virtual Link Configuration

CLI - This example configures a virtual link from the ABR adjacent to area 0.0.0.4, through a transit area to the neighbor router 10.1.1.252 at the other end of the link which is adjacent to the backbone.

```
Console(config-router)#area 0.0.0.0 virtual-link 10.1.1.252      4-270
Console(config-router)#
```


Configuring Network Area Addresses

OSPF protocol broadcast messages (i.e., Link State Advertisements or LSAs) are restricted by area to limit their impact on network performance. A large network should be split up into separate OSPF areas to increase network stability, and to reduce protocol traffic by summarizing routing information into more compact messages. Each router in an area shares the same view of the network topology, including area links, route summaries for directly connected areas, and external links to other areas.

Command Usage

- Use the Network Area Address Configuration page to specify an Area ID and the corresponding network address range. Each area identifies a logical group of OSPF routers that actively exchange LSAs to ensure that they share an identical view of the network topology.
- Each area must be connected to a backbone area. This area passes routing information between other areas in the autonomous system. The default value 0.0.0.0 is used as the Area ID for the backbone. All routers must be connected to the backbone, either directly, or through a virtual link if a direct physical connection is not possible.
- An area initially configured via the Network Area Address Configuration page is set as a normal area (or transit area) by default. A normal area can send and receive external Link State Advertisements (LSAs). If necessary, you can use the Area Configuration page to configure an area as a stubby area that cannot send or receive external LSAs, or a not-so-stubby area (NSSA) that can import external route information into its area (page 3-216).
- An area must be assigned a range of subnetwork addresses. This area and the corresponding address range forms a routing interface, and can be configured to aggregate LSAs from all of its subnetwork addresses and exchange this information with other routers in the network (page 3-219).

Command Attributes

- **IP Address** – Address of the interfaces to add to the area.
- **Netmask** – Network mask of the address range to add to the area.
- **Area ID** – Area to which the specified address or range is assigned. An OSPF area identifies a group of routers that share common routing information. (The area ID must be in the form of an IP address.)

Note: This router supports up to 16 total areas (either normal transit areas, stubs, or NSSAs).

3 Configuring the Switch

Web - Click Routing Protocol, OSPF, Network Area Address Configuration. Configure a backbone area that is contiguous with all the other areas in your network, configure an area for all of the other OSPF interfaces, then click Apply.

Network Area Address Configuration

Current Network Address Entries:

IP Address	Netmask	Area ID	Remove
10.0.0.0	255.0.0.0	0.0.0.0	<input type="checkbox"/>
10.1.1.0	255.255.255.0	0.0.0.1	<input type="checkbox"/>
10.1.2.0	255.255.255.0	0.0.0.2	<input type="checkbox"/>
10.1.3.0	255.255.255.0	0.0.0.3	<input type="checkbox"/>

Entry Count: 4

Network Address Settings:

IP Address	<input type="text"/>
Netmask	<input type="text"/>
Area ID	<input type="text"/>
<input type="button" value="Set"/>	

Figure 3-131 OSPF Network Area Address Configuration

CLI - This example configures the backbone area and one transit area.

```
Console(config-router)#network 10.0.0.0 255.0.0.0 area 0.0.0.0 4-267
Console(config-router)#network 10.1.1.0 255.255.255.0 area 0.0.0.1
Console(config-router)#end
Console#show ip ospf 4-278
Routing Process with ID 10.1.1.253
Supports only single TOS(TOS0) route
Number of area in this router is 4
Area 0.0.0.0 (BACKBONE)
    Number of interfaces in this area is 1
    SPF algorithm executed 8 times
Area 0.0.0.1
    Number of interfaces in this area is 1
    SPF algorithm executed 5 times
Area 0.0.0.2 (STUB)
    Number of interfaces in this area is 1
    SPF algorithm executed 13 times
Area 0.0.0.3 (NSSA)
    Number of interfaces in this area is 1
    SPF algorithm executed 12 times
Console#
```

3 Configuring the Switch

Configuring Summary Addresses (for External AS Routes)

An Autonomous System Boundary Router (ASBR) can redistribute routes learned from other protocols into all attached autonomous systems. (See “Redistributing External Routes” on page 3-231) To reduce the amount of external LSAs imported into your local routing domain, you can configure the router to advertise an aggregate route that consolidates a broad range of external addresses.

Command Usage

- If you are not sure what address ranges to consolidate, first enable external route redistribution via the Redistribute Configuration screen, view the routes imported into the routing table, and then configure one or more summary addresses to reduce the size of the routing table and consolidate these external routes for advertising into the local domain.
- To summarize routes sent between OSPF areas, use the Area Range Configuration screen (page 3-219).

Command Attributes

- **IP Address** – Summary address covering a range of addresses.
- **Netmask** – Network mask for the summary route.

Note: This router supports up to 16 Type-5 summary routes.

Web - Click Routing Protocol, OSPF, Summary Address Configuration. Specify the base address and network mask, then click Add.

Summary Address Configuration

Current Summary Address Entries:

IP Address	Netmask	Remove
10.1.0.0	255.255.0.0	<input type="checkbox"/>

Entry Count: 1

Summary Address Settings:

IP Address	<input type="text"/>
Netmask	<input type="text"/>
<input type="button" value="Add"/>	


Figure 3-132 OSPF Summary Address Configuration

CLI - This example This example creates a summary address for all routes contained in 192.168.x.x.

```
Console(config-router)#summary-address 192.168.0.0 255.255.0.0 4-265
Console(config-router)#
```

Redistributing External Routes

You can configure this router to import external routing information from other routing protocols into the autonomous system.

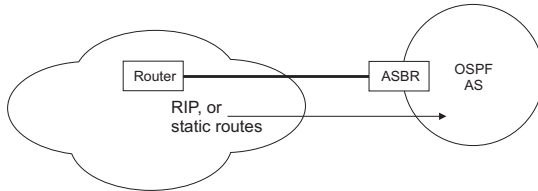

Command Usage

- This router supports redistribution for both RIP and static routes.
- When you redistribute external routes into an OSPF autonomous system (AS), the router automatically becomes an autonomous system boundary router (ASBR).
- However, if the router has been manually configured as an ASBR via the General Configuration screen, but redistribution is not enabled, the router will only generate a “default” external route into the AS if it has been configured to “always” advertise a default route even if an external route does not actually exist (page 3-213).
- Metric type specifies the way to advertise routes to destinations outside the autonomous system (AS) via External LSAs. Specify Type 1 to add the internal cost metric to the external route metric. In other words, the cost of the route from any router within the AS is equal to the cost associated with reaching the advertising ASBR, plus the cost of the external route. Specify Type 2 to only advertise external route metric.
- The metric value specified for redistributed routes supersedes the Default External Metric specified in the OSPF / General Configuration screen (page 3-213).

Command Attributes

- **Redistribute Protocol** – Specifies the external routing protocol type for which routing information is to be redistributed into the local routing domain. (Options: RIP, Static; Default: RIP)
- **Redistribute Metric Type** – Indicates the method used to calculate external route costs. (Options: Type 1, Type 2; Default: Type 1)
- **Redistribute Metric** – Metric assigned to all external routes for the specified protocol. (Range: 1-65535; Default: 10)

3 Configuring the Switch

Web - Click Routing Protocol, OSPF, Redistribute. Specify the protocol type to import, the metric type and path cost, then click Add.

Redistribute Configuration

Current Redistribute Protocol:

Redistribute Protocol	Redistribute Metric Type	Redistribute Metric	Remove
RIP	Type1	10	<input type="checkbox"/>
Entry Count: 1			<input type="button" value="Remove"/>

Redistribute Settings:

Redistribute Protocol	<input type="text" value="RIP"/>
Redistribute Metric Type	<input type="text" value="Type1"/>
Redistribute Metric (0 - 16777215)	<input type="text" value="10"/>
<input type="button" value="Set"/>	

Figure 3-133 OSPF Redistribute Configuration

CLI - This example redistributes routes learned from RIP as Type 1 external routes.

```
Console(config-router)#redistribute rip metric-type 1 4-266
Console(config-router)#
```

Configuring NSSA Settings

Use the OSPF / NSSA Settings page to configure a not-so-stubby area (NSSA), and to control the use of default routes for ABRs and ASBRs, or external routes learned from other routing domains and imported via an ABR. (For a detailed description of NSSA areas, refer to “Configuring OSPF Areas” on page 3-216.)

Command Attributes

- **Area ID** – Identifier for an not-so-stubby area (NSSA).
- **Default Information Originate** – An NSSA ASBR originates and floods Type-7 external LSAs throughout its area for known network destination outside of the AS. However, you can also configure an NSSA ASBR to generate a Type-7 “default” route to areas outside of the AS, or an NSSA ABR to generate a Type-7 “default” route to other areas within the AS. (Default: Disabled)
- **No Redistribution** – The Redistribute Configuration page (page 3-231) is used to import information from other routing domains (or protocols) into the AS. However, when the router is an NSSA ABR, you can choose whether or not to accept external routes learned from routers in other OSPF areas into the NSSA. (Default: Enabled)

Note: This router supports up to 16 areas, either normal transit areas, stubs, or NSSAs.

Web - Click Routing Protocol, OSPF, NSSA Settings. Create a new NSSA or modify the routing behavior for an existing NSSA, and click Apply.

NSSA Settings

Current NSSA Settings:

Area ID	Default Information Originate	No Redistribution	Remove
0.0.0.1	Enabled ▾	Disabled ▾	<input type="checkbox"/>
0.0.0.2	Disabled ▾	Enabled ▾	<input type="checkbox"/>
Entry Count: 3			Remove

NSSA Settings:

Area ID	<input style="width: 90%;" type="text"/>
Default Information Originate	Enabled ▾
No Redistribution	Enabled ▾
Set	

Figure 3-134 OSPF NSSA Settings

CLI - This example configures area 0.0.0.1 as a stub and sets the cost for the default summary route to 10.

```

Console(config-router)#area 0.0.0.1 nssa
    default-information-originate                4-269
Console(config-router)#area 0.0.0.2 nssa no-redistribution  4-269
Console(config-router)#
  
```

Displaying Link State Database Information

OSPF routers advertise routes using Link State Advertisements (LSAs). The full collection of LSAs collected by a router interface from the attached area is known as a link state database. Routers that are connected to multiple interfaces will have a separate database for each area. Each router in the same area should have an identical database describing the topology for that area, and the shortest path to external destinations.

The full database is exchanged between neighboring routers as soon as a new router is discovered. Afterwards, any changes that occur in the routing tables are synchronized with neighboring routers through a process called reliable flooding. You can show information about different LSAs stored in this router's database, which may include any of the following types:

- Router (Type 1) – All routers in an OSPF area originate Router LSAs that describe the state and cost of its active interfaces and neighbors.
- Network (Type 2) – The designated router for each area originates a Network LSA that describes all the routers that are attached to this network segment.
- Summary (Type 3) – Area border routers can generate Summary LSAs that give the cost to a subnetwork located outside the area.
- AS Summary (Type 4) – Area border routers can generate AS Summary LSAs that give the cost to an autonomous system boundary router (ASBR).
- AS External (Type 5) – An ASBR can generate an AS External LSA for each known network destination outside the AS.
- NSSA External (Type 7) – An ASBR within an NSSA generates an NSSA external link state advertisement for each known network destination outside the AS.

Command Attributes

- **Area ID** – Area defined for which you want to view LSA information. (This item must be entered in the form of an IP address.)
- **Link ID** – The network portion described by an LSA. The Link ID should be:
 - An IP network number for Type 3 Summary and Type 5 AS External LSAs. (When an Type 5 AS External LSA is describing a default route, its Link ID is set to the default destination 0.0.0.0.)
 - A Router ID for Router, Network, and Type 4 AS Summary LSAs.
- **Self-Originate** – Shows LSAs originated by this router.
- **LS Type** – LSA Type (Options: Type 1-5, 7). See the preceding description.
- **Adv Router** – IP address of the advertising router. If not entered, information about all advertising routers is displayed.
- **Age**²⁶ – Age of LSA (in seconds).
- **Seq**²⁶ – Sequence number of LSA (used to detect older duplicate LSAs).
- **Checksum**²⁶ – Checksum of the complete contents of the LSA.

²⁶. These items are read only.

Web - Click Routing Protocol, OSPF, Link State Database Information. Specify parameters for the LSAs you want to display, then click Query.

Link State Database Information

Query by:

<input type="checkbox"/> Area ID	<input type="text" value="0.0.0.0"/>	<input type="checkbox"/> LS Type	<input type="text" value="Type 1 : RouterLink"/>
<input type="checkbox"/> Link ID	<input type="text"/>	<input type="checkbox"/> ADV Router	<input type="text"/>
<input type="checkbox"/> Self-Originate	<input type="text" value="10.2.0.1"/>	<input type="button" value="Query"/>	

Query By : "none"

Search Results : 22 results (Total)
Type 1 : RouterLink (1) Type 2 : NetworkLink (2) Type 3 : SummaryLink (3)
Type 4 : asSummaryLink (4) Type 5 : asExternalLink (5) Type 7 : NSSAExternalLink (7)

Link State Data Router (Type 1)

Area ID	Link ID	ADV Router	Age	Seq#	Checksum
0.0.0.1	10.2.45.188	10.2.44.50	1002	0x8000001B	0xDCB7

Figure 3-135 OSPF Link State Database Information

CLI - The CLI provides a wider selection of display options for viewing the Link State Database. See “show ip ospf database” on page 4-280.

3 Configuring the Switch


Displaying Information on Border Routers

You can display entries in the local routing table for Area Border Routers (ABR) and Autonomous System Boundary Routers (ASBR) known by this device.

Field Attributes

- **Destination** – Identifier for the destination router.
- **Next Hop** – IP address of the next hop toward the destination.
- **Cost** – Link metric for this route.
- **Type** – Router type of the destination; either ABR, ASBR or both.
- **Rte Type** – Route type; either intra-area or interarea route (INTRA or INTER).
- **Area** – The area from which this route was learned.
- **SPF No** – The number of times the shortest path first algorithm has been executed for this route.

Web - Click Routing Protocol, OSPF, Border Router Information.

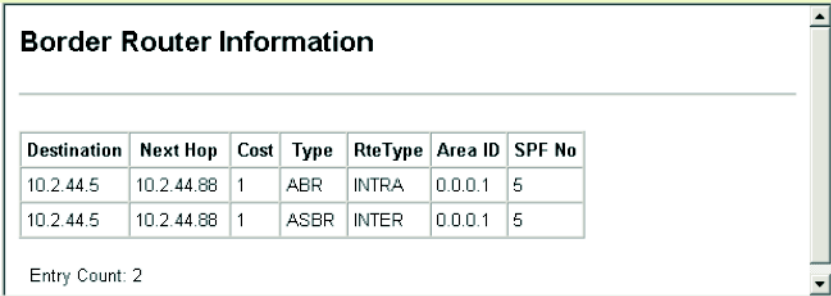

Border Router Information

Destination	Next Hop	Cost	Type	RteType	Area ID	SPF No
10.2.44.5	10.2.44.88	1	ABR	INTRA	0.0.0.1	5
10.2.44.5	10.2.44.88	1	ASBR	INTER	0.0.0.1	5

Entry Count: 2

Figure 3-136 OSPF Border Router Information

CLI - This example shows one router that serves as both the ABR for the local area and the ASBR for the autonomous system.

```
Console#show ip ospf border-routers 4-279
```

Destination	Next Hop	Cost	Type	RteType	Area	SPF No
10.2.44.5	10.2.44.88	1	ABR	INTRA	0.0.0.1	5
10.2.44.5	10.2.44.88	1	ASBR	INTER	0.0.0.1	5

```
Console#
```

Displaying Information on Neighbor Routers

You can display about neighboring routers on each interface within an OSPF area.

Field Attributes

- **ID** – Neighbor's router ID.
- **Priority** – Neighbor's router priority.
- **State** – OSPF state and identification flag.

States include:


- Down – Connection down
- Attempt – Connection down, but attempting contact (non-broadcast networks)
- Init – Have received Hello packet, but communications not yet established
- Two-way – Bidirectional communications established
- ExStart – Initializing adjacency between neighbors
- Exchange – Database descriptions being exchanged
- Loading – LSA databases being exchanged
- Full – Neighboring routers now fully adjacent

Identification flags include:

- D – Dynamic neighbor
- S – Static neighbor
- DR – Designated router
- BDR – Backup designated router

- **Address** – IP address of this interface.

Web - Click Routing Protocol, OSPF, Neighbor Information.

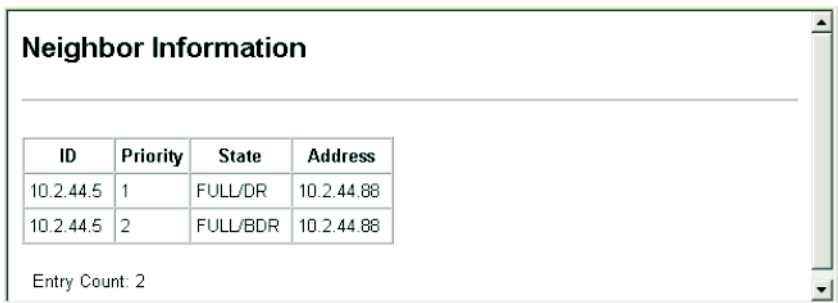


The screenshot shows a web interface titled "Neighbor Information". Below the title is a table with four columns: ID, Priority, State, and Address. There are two rows of data. Below the table, it says "Entry Count: 2".

ID	Priority	State	Address
10.2.44.5	1	FULL/DR	10.2.44.88
10.2.44.5	2	FULL/BDR	10.2.44.88

Entry Count: 2

Figure 3-137 OSPF Neighbor Information

CLI - This shows a designated router and backup designated router as neighbors.

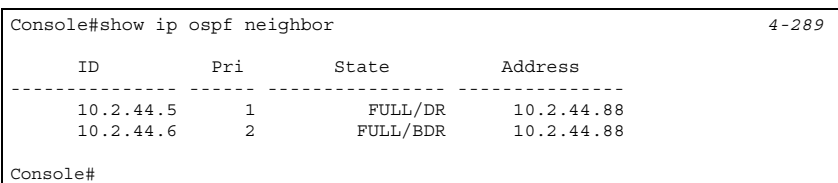

The screenshot shows the CLI output for the command "show ip ospf neighbor". The output is a table with four columns: ID, Pri, State, and Address. There are two rows of data. The prompt "Console#" is visible at the top and bottom.

```

Console#show ip ospf neighbor
ID          Pri      State           Address
-----
10.2.44.5   1        FULL/DR        10.2.44.88
10.2.44.6   2        FULL/BDR        10.2.44.88
Console#
  
```

Multicast Routing

This router can route multicast traffic to different subnetworks using either Distance Vector Multicast Routing Protocol (DVMRP) or Protocol-Independent Multicasting - Dense Mode (PIM-DM). These protocols flood multicast traffic downstream, and calculate the shortest-path, source-rooted delivery tree between each source and destination host group. They also rely on messages sent from IGMP-enabled Layer 2 switches and hosts to determine when hosts want to join or leave multicast groups.

DVMRP builds a source-rooted multicast delivery tree that allows it to prevent looping and determine the shortest path to the source of the multicast traffic. PIM also builds a source-rooted multicast delivery tree for each multicast source, but uses information from the router's unicast routing table instead of maintaining its own multicast routing table, making it routing protocol independent. Also note that the Dense Mode version of PIM is supported on this router because it is suitable for densely populated multicast groups which occur primarily in the LAN environment.

If DVMRP and PIM-DM are not enabled on this router or another multicast routing protocol is used on your network, you can manually configure the switch ports attached to a multicast router (page 3-152).

Configuring Global Settings for Multicast Routing

To use multicast routing on this router, you must first globally enable multicast routing as described in this section, globally enable DVRMP (page 3-242) or PIM (page 3-249), and specify the interfaces that will participate (page 3-245 or 3-250). Note that you can only enable one multicast routing protocol on any given interface.

Web – Click IP, Multicast Routing, General Setting. Set Multicast Forwarding Status to Enabled, and click Apply.

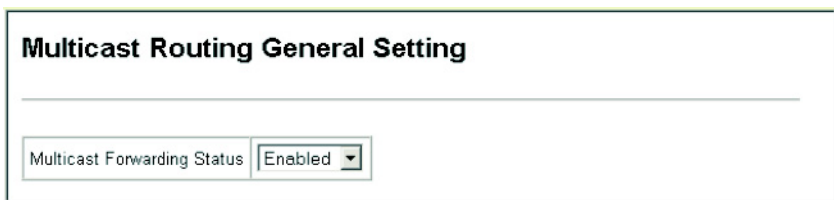


Figure 3-138 Multicast Routing General Settings

CLI – This example enables multicast routing globally for the router.

```
Console(config)#ip multicast-routing
Console(config)#
```

4-293

Displaying the Multicast Routing Table

You can display information on each multicast route this router has learned via DVMRP or PIM. The router learns multicast routes from neighboring routers, and also advertises these routes to its neighbors. The router stores entries for all paths learned by itself or from other routers, without considering actual group membership or prune messages. The routing table therefore does not indicate that the router has processed multicast traffic from any particular source listed in the table. It uses these routes to forward multicast traffic only if group members appear on directly-attached subnetworks or on subnetworks attached to downstream routers.

Field Attributes

- **Group Address** – IP group address for a multicast service.
- **Source Address** – Subnetwork containing the IP multicast source.
- **Netmask** – Network mask for the IP multicast source.
- **Interface** – Interface leading to the upstream neighbor.
- **Owner** – The associated multicast protocol (i.e., DVMRP or PIM).
- **Flags** – The flags associated with each interface indicate prune (P) if the downstream interface has been recently terminated or forwarding (F) if the interface is still active.
- **Detail** – This button displays detailed information for the selected entry.
- **Upstream Router**²⁷ – The multicast router immediately upstream for this group.
- **Downstream**²⁷ – Interface(s) on which multicast subscribers have been recorded.

27. These items are displayed in the IP Multicast Routing Entry (Detail) table.

3 Configuring the Switch

Web – Click IP, Multicast Routing, Multicast Routing Table. Click Detail to display additional information for any entry.

The screenshot displays two sections of a network configuration page. The top section, titled "IP Multicast Routing Table (Summary)", shows a table with two entries. Below the table, it indicates "Entry Count: 2". The bottom section, titled "IP Multicast Routing Entry (Detail)", provides a detailed view of the first entry from the summary table.

IP Multicast Routing Table (Summary)

Flags: P - Prune Up

Group Address	Source Address	Netmask	Interface	Owner	Flags	Detail
234.5.6.7	10.1.0.0	255.255.255.0	VLAN2	DVMRP	--	Detail
234.5.6.8	10.1.5.19	255.255.255.255	VLAN3	PIM-DM	--	Detail

Entry Count: 2

IP Multicast Routing Entry (Detail)

IP Multicast Routing Table
Flags: P, V Prune, F - Forwarding

Source Address:	10.1.0.0
Netmask:	255.255.255.0
Group Address:	234.5.6.7
Owner:	DVMRP
Upstream Interface:	VLAN 2
Upstream Router:	10.1.0.0
Downstream:	(none)

Figure 3-139 Multicast Routing Table

CLI – This example shows that multicast forwarding is enabled. The multicast routing table displays one entry for a multicast source routed by DVMRP, and another source routed via PIM.

```
Console#show ip mroute 4-293
IP Multicast Forwarding is enabled.

IP Multicast Routing Table

Flags: P - Prune, F - Forwarding


(234.5.6.7, 10.1.0.0, 255.255.255.0)
Owner: DVMRP
Upstream Interface: vlan2
Upstream Router: 10.1.0.0
Downstream:

(234.5.6.8, 10.1.5.19, 255.255.255.255)
Owner: PIM-DM
Upstream Interface: vlan3
Upstream Router: 10.1.5.19
Downstream:

Console#
```

Configuring DVMRP

The Distance-Vector Multicast Routing Protocol (DVMRP) behaves somewhat similarly to RIP. A router supporting DVMRP periodically floods its attached networks to pass information about supported multicast services along to new routers and hosts. Routers that receive a DVMRP packet send a copy out to all paths (except the path back to the origin). These routers then send a prune message back to the source to stop a data stream if the router is attached to a LAN which does not want to receive traffic from a particular multicast group. However, if a host attached to this router issues an IGMP message indicating that it wants to subscribe to the concerned multicast service, this router will use DVMRP to build up a source-rooted multicast delivery tree that allows it to prevent looping and determine the shortest path to the source of this multicast traffic.

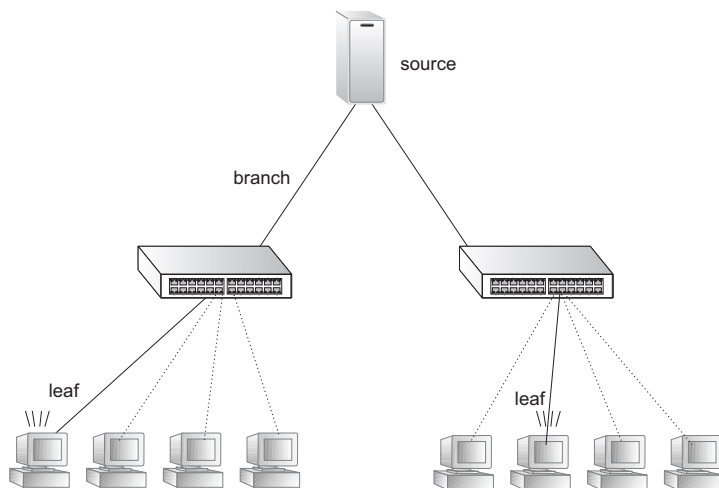

When this router receives the multicast message, it checks its unicast routing table to locate the port that provides the shortest path back to the source. If that path passes through the same port on which the multicast message was received, then this router records path information for the concerned multicast group in its routing table and forwards the multicast message on to adjacent routers, except for the port through which the message arrived. This process eliminates potential loops from the tree and ensures that the shortest path (in terms of hop count) is always used.

Configuring Global DVMRP Settings

DVMRP is used to route multicast traffic to nodes which have requested a specific multicast service via IGMP. This router uses Reverse Path Forwarding (RPF) to build a shortest-path delivery tree that begins at the source and spreads out to reach group members through the network. RPF uses three different techniques to dynamically reconfigure the multicast spanning tree: broadcasting, pruning, and grafting.

Command Usage

Broadcasting periodically floods the network with traffic from any active multicast server. If IGMP snooping is disabled, multicast traffic is flooded to all ports on the router. However, if IGMP snooping is enabled, then the first packet for any source group pair is flooded to all DVMRP downstream neighbors. If a packet is received through an interface that the router determines to be the shortest path back to the source (based on interface metrics), then the router forwards the packet on all interfaces except for the incoming interface.




The router will transmit a prune message back out the receiving interface (i.e., the parent interface) to its upstream neighboring router if there are no group members on its child interfaces. A prune message tells the upstream router to stop forwarding packets for a particular source-group pair for the prune lifetime.

If the router that previously sent a prune message now discovers a new group member on one of its connections, it sends a graft message to the upstream router. When an upstream router receives this message, it cancels the prune message. If necessary, graft messages are propagated back toward the source until reaching the nearest live branch in the multicast tree.

The global settings that control the prune and graft messages (i.e., prune lifetime) should be configured to the same values on all routers throughout the network to allow DVMRP to function properly. However, if you encounter problems in maintaining a multicast flow, then you may need to modify the protocol variables which control the exchange of topology information between DVMRP routers; such as the probe interval, neighbor timeout or report interval.

Command Attributes

- **DVMRP Protocol** – Enables/disables DVMRP globally. (Default: Disabled)
- **Probe Interval** – Sets the interval for sending neighbor probe messages to the multicast group address for all DVMRP routers. Probe messages are sent to neighboring DVMRP routers from

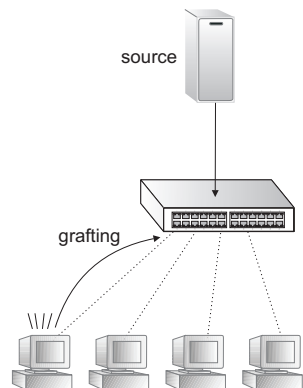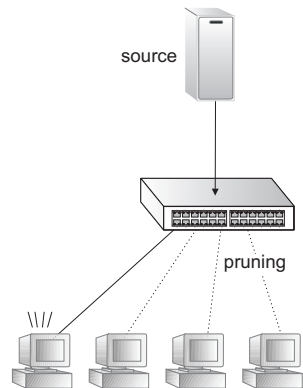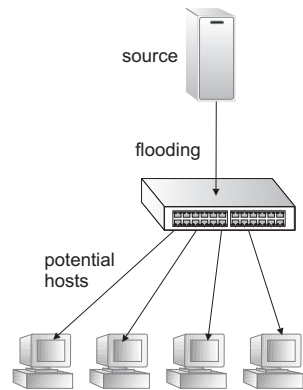

3 Configuring the Switch

which this device has received probes, and is used to verify whether or not these neighbors are still active members of the multicast tree. (Range: 1-65535 seconds; Default: 10 seconds)

- **Neighbor Timeout Interval** – Sets the interval to wait for messages from a DVMRP neighbor before declaring it dead. This command is used for timing out routes, and for setting the children and leaf flags. (Range: 1-65535 seconds; Default: 35 seconds)
- **Report Interval** – Specifies how often to propagate the complete set of routing tables to other neighbor DVMRP routers. (Range: 1-65535 seconds; Default: 60 seconds)
- **Flash Update Interval** – Specifies how often to send trigger updates, which reflect changes in the network topology.
- **Prune Lifetime** – Specifies how long a prune state will remain in effect for a multicast tree. (Range: 1-65535; Default: 7200 seconds)
- **Default Gateway**²⁸ – Specifies the default DVMRP gateway for IP multicast traffic. (Default: none)
 - The specified interface advertises itself as a default route to neighboring DVMRP routers. It advertises the default route out through its other interfaces. Neighboring routers on the other interfaces return Poison Reverse messages for the default route back to the router. When the router receives these messages, it records all the downstream routers for the default route.
 - When multicast traffic with an unknown source address (i.e., not found in the route table) is received on the default upstream route interface, the router forwards this traffic out through the other interfaces (with known downstream routers). However, when multicast traffic with an unknown source address is received on another interface, the router drops it because only the default upstream interface can forward multicast traffic from an unknown source.

28. CLI only.

Web – Click Routing Protocol, DVMRP, General Settings. Enable or disable DVMRP. Set the global parameters that control neighbor timeout, the exchange of routing information, or the prune lifetime, and click Apply.

DVMRP General Settings

DVMRP Protocol	Enabled ▾
Probe Interval (seconds)	<input style="width: 80px;" type="text" value="10"/>
Neighbor Timeout Interval (seconds)	<input style="width: 80px;" type="text" value="35"/>
Report Interval (seconds)	<input style="width: 80px;" type="text" value="60"/>
Flash Update Interval (seconds)	<input style="width: 80px;" type="text" value="5"/>
Prune Lifetime (seconds)	<input style="width: 80px;" type="text" value="7200"/>

Figure 3-140 DVMRP General Settings

CLI – This sets the global parameters for DVMRP and displays the current settings.

```

Console(config)#router dvmrp                                4-295
Console(config-router)#probe-interval 30                  4-296
Console(config-router)#nbr-timeout 40                     4-297
Console(config-router)#report-interval 90                 4-297
Console(config-router)#flash-update-interval 10           4-298
Console(config-router)#prune-lifetime 5000                4-298
Console(config-router)#default-gateway 10.1.0.253         4-299
Console(config-router)#end
Console#show router dvmrp                                  4-301
Admin Status                                             : enable
Probe Interval                                           : 10
Nbr expire                                               : 35
Minimum Flash Update Interval                           : 5
prune lifetime                                           : 7200
route report                                             : 60
Default Gateway                                          :
Console#
  
```

Configuring DVMRP Interface Settings

To fully enable DVMRP, you need to enable multicast routing globally for the router (page 3-238), enable DVMRP globally for the router (page 3-242), and also enable DVMRP for each interface that will participate in multicast routing.

Command Attributes

DVMRP Interface Information

- **Interface** – VLAN interface on this router that has enabled DVMRP.
- **Address** – IP address of this VLAN interface.
- **Metric** – The metric for this interface used to calculate distance vectors.
- **Status** – Shows that DVMRP is enabled on this interface.

3 Configuring the Switch

DVMRP Interface Settings

- **VLAN** – Selects a VLAN interface on this router.
- **Metric** – Sets the metric for this interface used to calculate distance vectors.
- **Status** – Enables or disables DVMRP.
 - If DVMRP is enabled on any interface, Layer 3 IGMP should also be enabled on the router (page 3-154).
 - If DVMRP is disabled, the interface cannot propagate IP multicast routing information. However, as long as IGMP snooping is enabled, the interface will still forward multicast traffic to downstream group members within the VLAN. But if IGMP snooping is disabled, then the interface will flood incoming multicast traffic to all ports in the attached VLAN.

Web – Click Routing Protocol, DVMRP, Interface Settings. Select a VLAN from the drop-down box under DVMRP Interface Settings, modify the Metric if required, set the Status to Enabled or Disabled, and click Apply.

The screenshot shows two panels. The top panel, titled "DVMRP Interface Information", contains a table with the following data:

Interface	Address	Metric	Status
VLAN1	10.1.0.253	1	Enabled
VLAN2	10.1.1.253	1	Enabled

Below the table, it says "Entry Count: 2".

The bottom panel, titled "DVMRP Interface Settings", contains three input fields:

- VLAN: A dropdown menu with "4" selected.
- Metric (1 - 31): An empty text input field.
- Status: A dropdown menu with "Disabled" selected.

Figure 3-141 DVMRP Interface Settings

CLI – This example enables DVMRP and sets the metric for VLAN 1.

```
Console(config)#interface vlan 1                               4-149
Console(config-if)#ip dvmrp                                  4-299
Console(config-if)#ip dvmrp metric 2                          4-300
Console(config-if)#end
Console#show ip dvmrp interface                               4-303
Vlan 1 is up
  DVMRP is enabled
  Metric is 2
Console#
```

Displaying Neighbor Information

You can display all the neighboring DVMRP routers.

Command Attributes

- **Neighbor Address** – The IP address of the network device immediately upstream for this multicast delivery tree.
- **Interface** – The IP interface on this router that connects to the upstream neighbor.
- **Up time** – The time since this device last became a DVMRP neighbor to this router.
- **Expire** – The time remaining before this entry will be aged out.
- **Capabilities** – A hexadecimal value that indicates the neighbor's capabilities. Each time a probe message is received from a neighbor, the router compares the capabilities bits with the previous version for that neighbor to check for changes in neighbor capabilities. (Refer to DVMRP IETF Draft v3-10 section 3.2.1 for a detailed description of these bits). These bits are described below:
 - Leaf (bit 0) - Neighbor has only one interface with neighbors.
 - Prune (bit 1) - Neighbor supports pruning.
 - Generation ID (bit 2) - Neighbor sends its Generation ID in probe messages.
 - Mtrace (bit 3) - Neighbor can handle multicast trace requests.
 - SNMP (bit 4) - Neighbor is SNMP capable.
 - Netmask - (bit 5) - Neighbor will accept network masks appended to the prune, graft, and graft acknowledgement messages.
 - Reserved (bit 6 and 7) - Reserved for future use.

Web – Click Routing Protocol, DVMRP, Neighbor Information.

DVMRP Neighbor Information				
Neighbor Address	Interface	Up time	Expire	Capabilities
10.1.0.254	VLAN1	79215	31	6

Entry Count: 1

Figure 3-142 DVMRP Neighbor Information

CLI – This example displays the only neighboring DVMRP router.

```

Console#show ip dvmrp neighbor

```

Address	Interface	Uptime	Expire	Capabilities
10.1.0.254	vlan1	79315	32	6

```

Console#

```

4-303

3 Configuring the Switch

Displaying the Routing Table


The router learns source-routed information from neighboring DVMRP routers and also advertises learned routes to its neighbors. The router merely records path information it has learned on its own or from other routers. It does not consider group membership or prune messages. Information stored in the routing table includes subnetworks from which IP multicast traffic originates, upstream routers that have sent multicast traffic in the past or have been learned through routing messages exchanged with other routers, interfaces connected to an upstream router, or outgoing interfaces that are connected to multicast hosts.

The DVMRP routing table contains multicast route information learned via DVMRP route updates, and is used to forward IP multicast traffic. The routes listed in the table do not reflect actual multicast traffic flows. For this information, you should look at the IGMP Member Port Table (page 3-154) or the IGMP Group Membership Table (page 3-158).

Command Attributes

- **IP Address** – IP subnetwork that contains a multicast source, an upstream router, or an outgoing interface connected to multicast hosts.
- **Netmask** – Subnet mask that is used for the source address. This mask identifies the host address bits used for routing to specific subnets.
- **Upstream Neighbor** – IP address of the network device immediately upstream for each multicast group.
- **Interface** – The IP interface on this router that connects to the upstream neighbor.
- **Metric** – The metric for this interface used to calculate distance vectors.
- **Up time** – The time elapsed since this entry was created.
- **Expire** – The time remaining before this entry will be aged out.

Web – Click Routing Protocol, DVMRP, DVMRP Routing Table.

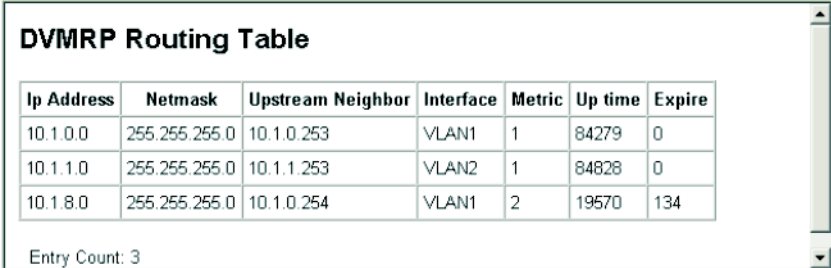

DVMRP Routing Table

Ip Address	Netmask	Upstream Neighbor	Interface	Metric	Up time	Expire
10.1.0.0	255.255.255.0	10.1.0.253	VLAN1	1	84279	0
10.1.1.0	255.255.255.0	10.1.1.253	VLAN2	1	84828	0
10.1.8.0	255.255.255.0	10.1.0.254	VLAN1	2	19570	134

Entry Count: 3

Figure 3-143 DVMRP Routing Table

CLI – This example displays known DVMRP routes.

```

Console#show ip dvmrp route

```

Source	Mask	Upstream_nbr	Interface	Metric	UpTime	Expire
10.1.0.0	255.255.255.0	10.1.0.253	vlan1	1	84438	0
10.1.1.0	255.255.255.0	10.1.1.253	vlan2	1	84987	0
10.1.8.0	255.255.255.0	10.1.0.254	vlan1	2	19729	97

```

Console#

```

Configuring PIM-DM

Protocol-Independent Multicasting (PIM) provides two different modes of operation: sparse mode and dense mode. Sparse mode (SM) is designed for networks where the probability of multicast group members is low, such as the Internet. Dense mode (DM), on the other hand, is designed for networks where the probability of multicast group members is high, such as a local network.

PIM-DM is a simple multicast routing protocol that uses flood and prune to build a source-routed multicast delivery tree for each multicast source-group pair. It is simpler than DVMRP because it does not maintain its own routing table. Instead, it uses the routing table provided by the unicast routing protocol enabled on the router interface. When the router receives a multicast packet for a source-group pair, PIM-DM checks the unicast routing table on the inbound interface to determine if this is the same interface used for routing unicast packets to the multicast source network. If it is not, the router drops the packet and sends a prune message back out the source interface. If it is the same interface used by the unicast protocol, then the router forwards a copy of the packet to all the other interfaces for which it has not already received a prune message for this specific source-group pair.

DVMRP holds the prune state for about two hours, while PIM-DM holds it for only about three minutes. This results in more flooding than encountered with DVMRP, but this is the only major trade-off for the lower processing overhead and simplicity of configuration for PIM-DM.


Configuring Global PIM-DM Settings

PIM-DM is used to route multicast traffic to nodes which have requested a specific multicast service via IGMP. It uses the router's unicast routing table to determine if the interface through which a packet is received provides the shortest path back to the source. This is done on a per hop basis back toward the source of the multicast delivery tree. PIM-DM uses three different techniques to dynamically reconfigure the multicast spanning tree: broadcasting, pruning, and grafting.

To use PIM-DM, you must enable it globally for the router as described below, and for each interface that will support multicast routing as described in the next section. Also note that IGMP must be enabled to allow the router to determine the location of group members.

3 Configuring the Switch

Web – Click Routing Protocol, PIM-DM, General Settings. Enable or disable PIM-DM globally for the router, and click Apply.

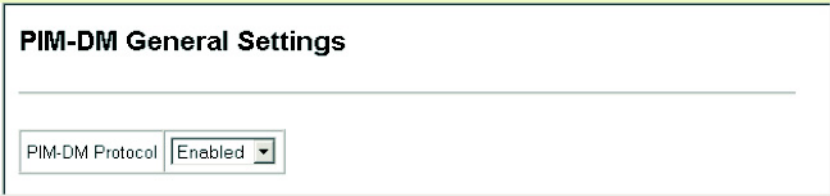

PIM-DM General Settings

PIM-DM Protocol Enabled ▾

Figure 3-144 PIM-DM General Settings

CLI – This example enables PIM-DM globally and displays the current status.

```
Console(config)#router pim 4-304
Console#show router pim 4-309
Admin Status: Enabled
Console#
```

Configuring PIM-DM Interface Settings

To fully enable PIM-DM, you need to enable multicast routing globally for the router (page 3-238), enable PIM-DM globally for the router (page 3-249), and also enable PIM-DM for each interface that will participate in multicast routing.

Command Usage

- PIM-DM functions similar to DVMRP by periodically flooding the network with traffic from any active multicast server (page 3-242). It also uses IGMP to determine the presence of multicast group members. The main difference, is that it uses the router's unicast routing table to determine if the interface through which a packet is received provides the shortest path back to the source.
- Dense-mode interfaces are subject to multicast flooding by default, and are only removed from the multicast routing table when the router determines that there are no group members or downstream routers, or when a prune message is received from a downstream router.
- The interface settings that control the prune and graft messages (i.e., prune holdtime) should be configured to the same values on all routers throughout the network to allow PIM to function properly.

Command Attributes

- **VLAN** – Selects a VLAN interface on this router.
- **PIM-DM Protocol Status** – Enables/disables PIM-DM. (Default: Disabled)
- **Hello Interval** – Sets the frequency at which PIM hello messages are transmitted. Hello messages are sent to neighboring PIM routers from which this device has received probes, and are used to verify whether or not these neighbors are still active members of the multicast tree. (Range: 1-65535 seconds; Default: 30)
- **Hello Holdtime** – Sets the interval to wait for hello messages from a neighboring PIM router before declaring it dead. Note that the hello holdtime should be 3.5 times the value of Hello Interval. (Range: 1-65535 seconds; Default: 105)

- **Trigger Hello Interval** – Configures the maximum time before transmitting a triggered PIM hello message after the router is rebooted or PIM is enabled on an interface. (Range: 1-65535 seconds; Default: 5)
 - When a router first starts or PIM is enabled on an interface, the hello-interval is set to random value between 0 and the Trigger Hello Interval. This prevents synchronization of Hello messages on multi-access links if multiple routers are powered on simultaneously.
 - Also, if a Hello message is received from a new neighbor, the receiving router will send its own Hello message after a random delay between 0 and the Trigger Hello Interval.
- **Prune Holdtime** – Configures of the hold time for the prune state. The multicast interface that first receives a multicast stream from a particular source forwards this traffic to all other PIM interfaces on the router. If there are no requesting groups on that interface, the leaf node sends a prune message upstream and enters a prune state for this multicast stream. The prune state is maintained until the prune holdtime timer expires or a graft message is received for the forwarding entry. (Range: 1-65535 seconds; Default: 210)
- **Graft Retry Interval** – Configures the time to wait for a graft acknowledgement before resending a graft. A graft message is sent by a router to cancel a prune state. When a router receives a graft message, it must respond with an graft acknowledgement message. If this acknowledgement message is lost, the router that sent the graft message will resend it a maximum number of times as defined by Max Graft Retries. (Range: 1-65535 seconds; Default: 3)
- **Max Graft Retries** – Configures the maximum number of times to resend a graft message if it has not been acknowledged. (Range: 1-65535; Default: 2)

3 Configuring the Switch

Web – Click Routing Protocol, PIM-DM, Interface Settings. Select a VLAN, enable or disable PIM-DM for the selected interface, modify any of the protocol parameters as required, and click Apply.

PIM-DM Interface Settings	
VLAN	2
PIM-DM Protocol Status	Enabled
Hello Interval (seconds)	30
Hello Holdtime (seconds)	105
Trigger Hello Interval (seconds)	5
Join/Prune Holdtime (seconds)	210
Graft Retry Interval (seconds)	3
Max Graft Retries	2

Figure 3-145 PIM-DM Interface Settings

CLI – This example sets the PIM-DM protocol parameters for VLAN 2, and displays the current settings.

```
Console(config)#interface vlan 2 4-191
Console(config-if)#ip pim dense-mode 4-305
Console(config-if)#ip pim hello-interval 60 4-306
Console(config-if)#ip pim hello-holdtime 210 4-306
Console(config-if)#ip pim trigger-hello-interval 10 4-307
Console(config-if)#ip pim join-prune-holdtime 60 4-307
Console(config-if)#ip pim graft-retry-interval 9 4-308
Console(config-if)#ip pim max-graft-retries 5 4-309
Console(config-if)#end
Console#show ip pim interface 2 4-309
Vlan 2 is up
PIM is enabled, mode is Dense.
Internet address is 10.1.1.253.
Hello time interval is 60 sec, trigger hello time interval is 10 sec.
Hello holdtime is 210 sec.
Join/Prune holdtime is 60 sec.
Graft retry interval is 9 sec, max graft retries is 5.
DR Internet address is 10.1.1.253, neighbor count is 0.
Console#
```

Displaying Interface Information

You can display a summary of the current interface status for PIM-DM, including the number of neighboring PIM routers, and the address of the designated PIM router.

Command Attributes

- **Interface** – A VLAN interface on this router.
- **Address** – The IP address for this interface.
- **Mode** – The PIM mode in use. (This router only supports Dense Mode at this time.)
- **Neighbor Count** – The number of PIM neighbors detected on this interface.
- **DR Address** – The designated PIM router for this interface.

Web – Click Routing Protocol, PIM-DM, Interface Information.

PIM-DM Interface Information				
Interface	Address	Mode	Neighbor Count	DR Address
VLAN1	10.1.0.252	Dense	1	10.1.0.253
VLAN10	10.1.9.252	Dense	0	10.1.9.252

Entry Count: 2

Figure 3-146 PIM-DM Interface Information

CLI – This example shows the PIM-DM interface summary for VLAN 1.

```

Console#show ip pim interface 1
Vlan 1 is up
PIM is enabled, mode is Dense.
Internet address is 10.1.0.253.
Hello time interval is 30 sec, trigger hello time interval is 5 sec.
Hello holdtime is 105 sec.
Join/Prune holdtime is 210 sec.
Graft retry interval is 3 sec, max graft retries is 2.
DR Internet address is 10.1.0.253, neighbor count is 1.
Console#
  
```

Displaying Neighbor Information

You can display all the neighboring PIM-DM routers.

Command Attributes

- **Neighbor Address** – IP address of the next-hop router.
- **Interface** – VLAN that is attached to this neighbor.
- **Up time** – The duration this entry has been active.
- **Expire** – The time before this entry will be removed.
- **Mode** – PIM mode used on this interface. (Only Dense Mode is supported.)

3 Configuring the Switch

Web – Click Routing Protocol, PIM-DM, Neighbor Information.

PIM-DM Neighbor Information				
Neighbor Address	Interface	Up time	Expire	Mode
10.1.0.253	VLAN1	596	78	

Entry Count: 1

Figure 3-147 PIM-DM Neighbor Information

CLI – This example displays the only neighboring PIM-DM router.

```
Console#show ip pim neighbor 4-310
  Address      VLAN Interface  Uptime    Expire    Mode
-----
    10.1.0.253          1      613      91    Dense
Console#
```

Chapter 4: Command Line Interface

This chapter describes how to use the Command Line Interface (CLI).

Using the Command Line Interface

Accessing the CLI

When accessing the management interface for the switch over a direct connection to the server's console port, or via a Telnet connection, the switch can be managed by entering command keywords and parameters at the prompt. Using the switch's command-line interface (CLI) is very similar to entering commands on a UNIX system.

Console Connection

To access the switch through the console port, perform these steps:

1. At the console prompt, enter the user name and password. (The default user names are "admin" and "guest" with corresponding passwords of "admin" and "guest.") When the administrator user name and password is entered, the CLI displays the "Console#" prompt and enters privileged access mode (i.e., Privileged Exec). But when the guest user name and password is entered, the CLI displays the "Console>" prompt and enters normal access mode (i.e., Normal Exec).
2. Enter the necessary commands to complete your desired tasks.
3. When finished, exit the session with the "quit" or "exit" command.

After connecting to the system through the console port, the login screen displays:

```
User Access Verification
Username: admin
Password:
      CLI session with the LAYER3 12PORT GIGABIT INTELLIGENT SWITCH is
      opened.
      To end the CLI session, enter [Exit].
Console#
```

Telnet Connection

Telnet operates over the IP transport protocol. In this environment, your management station and any network device you want to manage over the network must have a valid IP address. Valid IP addresses consist of four numbers, 0 to 255, separated by periods. Each address consists of a network portion and host portion. For example, the IP address assigned to this switch, 10.1.0.1, consists of a network portion (10.1.0) and a host portion (1).

4 Command Line Interface

Note: The IP address for this switch is obtained via DHCP by default.

To access the switch through a Telnet session, you must first set the IP address for the switch, and set the default gateway if you are managing the switch from a different IP subnet. For example,

```
Console(config)#interface vlan 1
Console(config-if)#ip address 10.1.0.254 255.255.255.0
Console(config-if)#exit
Console(config)#ip default-gateway 10.1.0.254
```

If your corporate network is connected to another network outside your office or to the Internet, you need to apply for a registered IP address. However, if you are attached to an isolated network, then you can use any IP address that matches the network segment to which you are attached.

After you configure the switch with an IP address, you can open a Telnet session by performing these steps:

1. From the remote host, enter the Telnet command and the IP address of the device you want to access.
2. At the prompt, enter the user name and system password. The CLI will display the “Vty-*n*” prompt for the administrator to show that you are using privileged access mode (i.e., Privileged Exec), or “Vty-*n*>” for the guest to show that you are using normal access mode (i.e., Normal Exec), where *n* indicates the number of the current Telnet session.
3. Enter the necessary commands to complete your desired tasks.
4. When finished, exit the session with the “quit” or “exit” command.

After entering the Telnet command, the login screen displays:

```
Username: admin
Password:

      CLI session with the LAYER3 12PORT GIGABIT INTELLIGENT SWITCH is
      opened.
      To end the CLI session, enter [Exit].

Vty-0#
```

Note: You can open up to four sessions to the device via Telnet.

Entering Commands

This section describes how to enter CLI commands.

Keywords and Arguments

A CLI command is a series of keywords and arguments. Keywords identify a command, and arguments specify configuration parameters. For example, in the command “show interfaces status ethernet 1/5,” **show interfaces** and **status** are keywords, **ethernet** is an argument that specifies the interface type, and **1/5** specifies the unit/port.

You can enter commands as follows:

- To enter a simple command, enter the command keyword.
- To enter multiple commands, enter each command in the required order. For example, to enable Privileged Exec command mode, and display the startup configuration, enter:

```
Console>enable
Console#show startup-config
```

- To enter commands that require parameters, enter the required parameters after the command keyword. For example, to set a password for the administrator, enter:

```
Console(config)#username admin password 0 smith
```

Minimum Abbreviation

The CLI will accept a minimum number of characters that uniquely identify a command. For example, the command “configure” can be entered as **con**. If an entry is ambiguous, the system will prompt for further input.

Command Completion

If you terminate input with a Tab key, the CLI will print the remaining characters of a partial keyword up to the point of ambiguity. In the “logging history” example, typing **log** followed by a tab will result in printing the command up to “**logging**.”

Getting Help on Commands

You can display a brief description of the help system by entering the **help** command. You can also display command syntax by using the “?” character to list keywords or parameters.

Showing Commands

If you enter a “?” at the command prompt, the system will display the first level of keywords for the current command class (Normal Exec or Privileged Exec) or configuration class (Global, ACL, DHCP, Interface, Line, Router, VLAN Database, or MSTP). You can also display a list of valid keywords for a specific command. For example, the command “**show ?**” displays a list of possible show commands:

```
Console#show ?
  access-group      Access groups
  access-list       Access lists
  arp               Information of ARP cache
  bridge-ext        Bridge extend information
  calendar          Date information
  dns               DNS information
  dot1x             Show 802.1x content
  garp              GARP property
  gvrp              Show GARP information of interface
  history           Information of history
  hosts             Host information
  interfaces        Information of interfaces
  ip                IP information
  line              TTY line information
  logging           Show the contents of logging buffers
  mac               MAC access lists
  mac-address-table Set configuration of the address table
  management        Show management IP filter
  map               Map priority
  marking           Specify marker
  port              Characteristics of the port
  protocol-vlan     Protocol-VLAN information
  public-key        Show information of public key
  pvlan            Information of private VLAN
  queue            Information of priority queue
  radius-server     RADIUS server information
  rip               RIP
  router            Router
  running-config    The system configuration of running
  snmp              SNMP statistics
  sntp              SNTP
  spanning-tree     Specify spanning-tree
  ssh               Secure shell
  startup-config    The system configuration of starting up
  system            Information of system
  tacacs-server     Login by TACACS server
  users             Display information about terminal lines
  version           System hardware and software status
  vlan              Switch VLAN Virtual Interface
  vrrp              Show vrrp
Console#show
```


The command “**show interfaces ?**” will display the following information:

```
Console#show interfaces ?
  counters      Information of interfaces counters
  protocol-vlan Protocol-vlan information
  status        Information of interfaces status
  switchport    Information of interfaces switchport
Console#
```

Partial Keyword Lookup

If you terminate a partial keyword with a question mark, alternatives that match the initial letters are provided. (Remember not to leave a space between the command and question mark.) For example “**s?**” shows all the keywords starting with “s.”

```
Console#show s?
snmp          sntp          spanning-tree  ssh           startup-config
system
Console#sh s
```

Negating the Effect of Commands

For many configuration commands you can enter the prefix keyword “**no**” to cancel the effect of a command or reset the configuration to the default value. For example, the **logging** command will log system messages to a host server. To disable logging, specify the **no logging** command. This guide describes the negation effect for all applicable commands.

Using Command History

The CLI maintains a history of commands that have been entered. You can scroll back through the history of commands by pressing the up arrow key. Any command displayed in the history list can be executed again, or first modified and then executed.

Using the **show history** command displays a longer list of recently executed commands.

Understanding Command Modes

The command set is divided into Exec and Configuration classes. Exec commands generally display information on system status or clear statistical counters. Configuration commands, on the other hand, modify interface parameters or enable certain switching functions. These classes are further divided into different modes. Available commands depend on the selected mode. You can always enter a question mark “?” at the prompt to display a list of the commands available for the current mode. The command classes and associated modes are displayed in the following table:

Table 4-1 General Command Modes

Class	Mode
Exec	Normal Privileged
Configuration	Global* Access Control List DHCP Interface Line Multiple Spanning Tree Router VLAN Database

* You must be in Privileged Exec mode to access the Global configuration mode.
You must be in Global Configuration mode to access any of the other configuration modes.

Exec Commands

When you open a new console session on the switch with the user name and password “guest,” the system enters the Normal Exec command mode (or guest mode), displaying the “Console>” command prompt. Only a limited number of the commands are available in this mode. You can access all commands only from the Privileged Exec command mode (or administrator mode). To access Privilege Exec mode, open a new console session with the user name and password “admin.” The system will now display the “Console#” command prompt. You can also enter Privileged Exec mode from within Normal Exec mode, by entering the **enable** command, followed by the privileged level password “super” (page 4-28).

To enter Privileged Exec mode, enter the following user names and passwords:

```
Username: admin
Password: [admin login password]

      CLI session with the LAYER3 12PORT GIGABIT INTELLIGENT SWITCH is
      opened.
      To end the CLI session, enter [Exit].

Console#
```

```
Username: guest
Password: [guest login password]

      CLI session with the LAYER3 12PORT GIGABIT INTELLIGENT SWITCH is
      opened.
      To end the CLI session, enter [Exit].

Console#enable
Password: [privileged level password]
Console#
```

Configuration Commands

Configuration commands are privileged level commands used to modify switch settings. These commands modify the running configuration only and are not saved when the switch is rebooted. To store the running configuration in non-volatile storage, use the **copy running-config startup-config** command.

The configuration commands are organized into different modes:

- Global Configuration - These commands modify the system level configuration, and include commands such as **hostname** and **snmp-server community**.
- Access Control List Configuration - These commands are used for packet filtering.
- DHCP Configuration - These commands are used to configure the DHCP server.
- Interface Configuration - These commands modify the port configuration such as **speed-duplex** and **negotiation**.
- Line Configuration - These commands modify the console port and Telnet configuration, and include command such as **parity** and **databits**.
- Router Configuration - These commands configure global settings for unicast and multicast routing protocols.
- VLAN Configuration - Includes the command to create VLAN groups.
- Multiple Spanning Tree Configuration - These commands configure settings for the selected multiple spanning tree instance.

To enter the Global Configuration mode, enter the command **configure** in Privileged Exec mode. The system prompt will change to “Console(config)#” which gives you access privilege to all Global Configuration commands.

```
Console#configure
Console(config)#
```

4 Command Line Interface

To enter the other modes, at the configuration prompt type one of the following commands. Use the **exit** or **end** command to return to the Privileged Exec mode.

Table 4-2 Configuration Command Modes

Mode	Command	Prompt	Page
Line	line {console vty}	Console(config-line)#	4-11
Access Control List	access-list ip standard access-list ip extended access-list ip mask-precedence access-list mac access-list mac mask-precedence	Console(config-std-acl) Console(config-ext-acl) Console(config-ip-mask-acl) Console(config-mac-acl) Console(config-mac-mask-acl)	4-87
DHCP	ip dhcp pool	Console(config-dhcp)	4-126
Interface	interface {ethernet <i>port</i> port-channel <i>id</i> vlan <i>id</i> }	Console(config-if)#	4-149
VLAN	vlan database	Console(config-vlan)	4-188
MSTP	spanning-tree mst-configuration	Console(config-mstp)#	4-175
Router	router {rip ospf dvmrp pim}	Console(config-router)	4-249 4-260 4-295 4-304

For example, you can use the following commands to enter interface configuration mode, and then return to Privileged Exec mode

```
Console(config)#interface ethernet 1/5
:
Console(config-if)#exit
Console(config)#
```

Command Line Processing

Commands are not case sensitive. You can abbreviate commands and parameters as long as they contain enough letters to differentiate them from any other currently available commands or parameters. You can use the Tab key to complete partial commands, or enter a partial command followed by the “?” character to display a list of possible matches. You can also use the following editing keystrokes for command-line processing:

Table 4-3 Keystroke Commands

Keystroke	Function
Ctrl-A	Shifts cursor to start of command line.
Ctrl-B	Shifts cursor to the left one character.
Ctrl-C	Terminates the current task and displays the command prompt.
Ctrl-E	Shifts cursor to end of command line.
Ctrl-F	Shifts cursor to the right one character.
Ctrl-K	Deletes all characters from the cursor to the end of the line.
Ctrl-L	Repeats current command line on a new line.
Ctrl-N	Enters the next command line in the history buffer.
Ctrl-P	Enters the last command.
Ctrl-R	Repeats current command line on a new line.
Ctrl-U	Deletes from the cursor to the beginning of the line.
Ctrl-W	Deletes the last word typed.
Esc-B	Moves the cursor back one word.
Esc-D	Deletes from the cursor to the end of the word.
Esc-F	Moves the cursor forward one word.
Delete key or backspace key	Erases a mistake when entering a command.

Command Groups

The system commands can be broken down into the functional groups shown below.

Table 4-4 Command Group Index

Command Group	Description	Page
Line	Sets communication parameters for the serial port and Telnet, including baud rate and console time-out	4-11
General	Basic commands for entering privileged access mode, restarting the system, or quitting the CLI	4-20
System Management	Controls system logs, system passwords, user name, browser management options, and a variety of other system information	4-25
Flash/File	Manages code image or switch configuration files	4-64
Authentication	Configures logon access using local or remote authentication; also configures port security and IEEE 802.1X port access control	4-70
Access Control List	Provides filtering for IP frames (based on address, protocol, TCP/UDP port number or TCP control code) or non-IP frames (based on MAC address or Ethernet type)	4-87
SNMP	Activates authentication failure traps; configures community access strings, and trap managers; also configures IP address filtering	4-113
DHCP	Configures DHCP client, relay and server functions	4-126
DNS	Configures DNS services.	4-141
Interface	Configures the connection parameters for all Ethernet ports, aggregated links, and VLANs	4-149
Mirror Port	Mirrors data to another port for analysis without affecting the data passing through or the performance of the monitored port	4-160
Rate Limiting	Controls the maximum rate for traffic transmitted or received on a port	4-162
Link Aggregation	Statically groups multiple ports into a single logical trunk; configures Link Aggregation Control Protocol for port trunks	4-163
Address Table	Configures the address table for filtering specified addresses, displays current entries, clears the table, or sets the aging time	4-166
Spanning Tree	Configures Spanning Tree settings for the switch	4-169
VLANs	Configures VLAN settings, and defines port membership for VLAN groups; also enables or configures private VLANs and protocol VLANs	4-188
GVRP and Bridge Extension	Configures GVRP settings that permit automatic VLAN learning; shows the configuration for the bridge extension MIB	4-203
Priority	Sets port priority for untagged frames, selects strict priority or weighted round robin, relative weight for each priority queue, also sets priority for TCP traffic types, IP precedence, and DSCP	4-207
Multicast Filtering	Configures IGMP multicast filtering, query parameters, and specifies ports attached to a multicast router	4-220
IP Interface	Configures IP address for the switch interfaces; also configures ARP parameters and static entries	4-236
IP Routing	Configures static and dynamic unicast routing	4-244

Table 4-4 Command Group Index (Continued)

Command Group	Description	Page
Multicast Routing	Configures multicast routing protocols DVMRP and PIM-DM	4-291
Router Redundancy	Configures router redundancy to create primary and backup routers	4-311

The access mode shown in the following tables is indicated by these abbreviations:

NE (Normal Exec)

PE (Privileged Exec)

GC (Global Configuration)

LC (Line Configuration)

IC (Interface Configuration)

VC (VLAN Database Configuration)

MST (Multiple Spanning Tree)

ACL (Access Control List Configuration)

DC (DHCP Server Configuration)

RC (Router Configuration)

Line Commands

You can access the onboard configuration program by attaching a VT100 compatible device to the server's serial port. These commands are used to set communication parameters for the serial port or Telnet (i.e., a virtual terminal).

Table 4-5 Line Commands

Command	Function	Mode	Page
line	Identifies a specific line for configuration and starts the line configuration mode	GC	4-12
login	Enables password checking at login	LC	4-12
password	Specifies a password on a line	LC	4-13
timeout login response	Sets the interval that the system waits for a login attempt	LC	4-14
exec-timeout	Sets the interval that the command interpreter waits until user input is detected	LC	4-15
password-thresh	Sets the password intrusion threshold, which limits the number of failed logon attempts	LC	4-15
silent-time*	Sets the amount of time the management console is inaccessible after the number of unsuccessful logon attempts exceeds the threshold set by the password-thresh command	LC	4-16
databits*	Sets the number of data bits per character that are interpreted and generated by hardware	LC	4-17
parity*	Defines the generation of a parity bit	LC	4-17
speed*	Sets the terminal baud rate	LC	4-18
stopbits*	Sets the number of the stop bits transmitted per byte	LC	4-18
disconnect	Terminates a line connection	PE	4-19
show line	Displays a terminal line's parameters	NE, PE	4-19

* These commands only apply to the serial port.

4 Command Line Interface

line

This command identifies a specific line for configuration, and to process subsequent line configuration commands.

Syntax

line {**console** | **vty**}

- **console** - Console terminal line.
- **vty** - Virtual terminal for remote console access (i.e., Telnet).

Default Setting

There is no default line.

Command Mode

Global Configuration

Command Usage

Telnet is considered a virtual terminal connection and will be shown as “VTY” in screen displays such as **show users**. However, the serial communication parameters (e.g., databits) do not affect Telnet connections.

Example

To enter console line mode, enter the following command:

```
Console(config)#line console
Console(config-line)#
```

Related Commands

show line (4-19)
show users (4-62)

login

This command enables password checking at login. Use the **no** form to disable password checking and allow connections without a password.

Syntax

login [**local**]
no login

local - Selects local password checking. Authentication is based on the user name specified with the **username** command.

Default Setting

login local

Command Mode

Line Configuration

Command Usage

- There are three authentication modes provided by the switch itself at login:
 - **login** selects authentication by a single global password as specified by the **password** line configuration command. When using this method, the management interface starts in Normal Exec (NE) mode.
 - **login local** selects authentication via the user name and password specified by the **username** command (i.e., default setting). When using this method, the management interface starts in Normal Exec (NE) or Privileged Exec (PE) mode, depending on the user's privilege level (0 or 15 respectively).
 - **no login** selects no authentication. When using this method, the management interface starts in Normal Exec (NE) mode.
- This command controls login authentication via the switch itself. To configure user names and passwords for remote authentication servers, you must use the RADIUS or TACACS software installed on those servers.

Example

```
Console(config-line)#login local
Console(config-line)#
```

Related Commands

username (4-27)
password (4-13)

password

This command specifies the password for a line. Use the **no** form to remove the password.

Syntax

password {0 | 7} *password*
no password

- {0 | 7} - 0 means plain password, 7 means encrypted password
- *password* - Character string that specifies the line password.
(Maximum length: 8 characters plain text, 32 encrypted, case sensitive)

Default Setting

No password is specified.

Command Mode

Line Configuration

Command Usage

- When a connection is started on a line with password protection, the system prompts for the password. If you enter the correct password, the system shows a prompt. You can use the **password-thresh** command to set the

4 Command Line Interface

number of times a user can enter an incorrect password before the system terminates the line connection and returns the terminal to the idle state.

- The encrypted password is required for compatibility with legacy password settings (i.e., plain text or encrypted) when reading the configuration file during system bootup or when downloading the configuration file from a TFTP server. There is no need for you to manually configure encrypted passwords.

Example

```
Console(config-line)#password 0 secret
Console(config-line)#
```

Related Commands

login (4-12)

password-thresh (4-15)

timeout login response

This command sets the interval that the system waits for a user to log into the CLI. Use the **no** form to restore the default setting.

Syntax

timeout login response [*seconds*]

no timeout login response

seconds - Integer that specifies the timeout interval.
(Range: 0 - 300 seconds; 0: disabled)

Default Setting

- CLI: Disabled (0 seconds)
- Telnet: 600 seconds

Command Mode

Line Configuration

Command Usage

- If a login attempt is not detected within the timeout interval, the connection is terminated for the session.
- This command applies to both the local console and Telnet connections.
- The timeout for Telnet cannot be disabled.
- Using the command without specifying a timeout restores the default setting.

Example

To set the timeout to two minutes, enter this command:

```
Console(config-line)#timeout login response 120
Console(config-line)#
```

exec-timeout

This command sets the interval that the system waits until user input is detected. Use the **no** form to restore the default.

Syntax

exec-timeout [*seconds*]
no exec-timeout

seconds - Integer that specifies the timeout interval.
(Range: 0 - 65535 seconds; 0: no timeout)

Default Setting

CLI: No timeout
Telnet: 10 minutes

Command Mode

Line Configuration

Command Usage

- If user input is detected within the timeout interval, the session is kept open; otherwise the session is terminated.
- This command applies to both the local console and Telnet connections.
- The timeout for Telnet cannot be disabled.
- Using the command without specifying a timeout restores the default setting.

Example

To set the timeout to two minutes, enter this command:

```
Console(config-line)#exec-timeout 120  
Console(config-line)#
```

password-thresh

This command sets the password intrusion threshold which limits the number of failed logon attempts. Use the **no** form to remove the threshold value.

Syntax

password-thresh [*threshold*]
no password-thresh

threshold - The number of allowed password attempts.
(Range: 1-120; 0: no threshold)

Default Setting

The default value is three attempts.

Command Mode

Line Configuration

4 Command Line Interface

Command Usage

- When the logon attempt threshold is reached, the system interface becomes silent for a specified amount of time before allowing the next logon attempt. (Use the **silent-time** command to set this interval.) When this threshold is reached for Telnet, the Telnet logon interface shuts down.
- This command applies to both the local console and Telnet connections.

Example

To set the password threshold to five attempts, enter this command:

```
Console(config-line)#password-thresh 5
Console(config-line)#
```

Related Commands

silent-time (4-16)

silent-time

This command sets the amount of time the management console is inaccessible after the number of unsuccessful logon attempts exceeds the threshold set by the **password-thresh** command. Use the **no** form to remove the silent time value.

Syntax

silent-time [*seconds*]
no silent-time

seconds - The number of seconds to disable console response.
(Range: 0-65535; 0: no silent-time)

Default Setting

The default value is no silent-time.

Command Mode

Line Configuration

Example

To set the silent time to 60 seconds, enter this command:

```
Console(config-line)#silent-time 60
Console(config-line)#
```

Related Commands

password-thresh (4-15)

databits

This command sets the number of data bits per character that are interpreted and generated by the console port. Use the **no** form to restore the default value.

Syntax

databits {7 | 8}
no databits

- 7 - Seven data bits per character.
- 8 - Eight data bits per character.

Default Setting

8 data bits per character

Command Mode

Line Configuration

Command Usage

The **databits** command can be used to mask the high bit on input from devices that generate 7 data bits with parity. If parity is being generated, specify 7 data bits per character. If no parity is required, specify 8 data bits per character.

Example

To specify 7 data bits, enter this command:

```
Console(config-line)#databits 7
Console(config-line)#
```

Related Commands

parity (4-17)

parity

This command defines the generation of a parity bit. Use the **no** form to restore the default setting.

Syntax

parity {none | even | odd}
no parity

- **none** - No parity
- **even** - Even parity
- **odd** - Odd parity

Default Setting

No parity

Command Mode

Line Configuration

4 Command Line Interface

Command Usage

Communication protocols provided by devices such as terminals and modems often require a specific parity bit setting.

Example

To specify no parity, enter this command:

```
Console(config-line)#parity none
Console(config-line)#
```

speed

This command sets the terminal line's baud rate. This command sets both the transmit (to terminal) and receive (from terminal) speeds. Use the **no** form to restore the default setting.

Syntax

speed *bps*
no speed

bps - Baud rate in bits per second.
(Options: 9600, 19200, 38400, 57600, 115200 bps, or Auto)

Default Setting

Auto

Command Mode

Line Configuration

Command Usage

Set the speed to match the baud rate of the device connected to the serial port. Some baud rates available on devices connected to the port might not be supported. The system indicates if the speed you selected is not supported.

Example

To specify 57600 bps, enter this command:

```
Console(config-line)#speed 57600
Console(config-line)#
```

stopbits

This command sets the number of the stop bits transmitted per byte. Use the **no** form to restore the default setting.

Syntax

stopbits {1 | 2}

- 1 - One stop bit
- 2 - Two stop bits

Default Setting

1 stop bit

Command Mode

Line Configuration

Example

To specify 2 stop bits, enter this command:

```
Console(config-line)#stopbits 2
Console(config-line)#
```

disconnect

This command terminates an SSH, Telnet, or console connection.

Syntax**disconnect** *session-id*

session-id – The session identifier for an SSH, Telnet or console connection. (Range: 0-4)

Command Mode

Privileged Exec

Command Usage

Specifying session identifier “0” will disconnect the console connection.

Specifying any other identifiers for an active session will disconnect an SSH or Telnet connection.

Example

```
Console#disconnect 1
Console#
```

Related Commands

show ssh (4-42)

show users (4-62)

show line

This command displays the terminal line’s parameters.

Syntax**show line** [**console** | **vty**]

- **console** - Console terminal line.
- **vty** - Virtual terminal for remote console access (i.e., Telnet).

Default Setting

Shows all lines

Command Mode

Normal Exec, Privileged Exec

4 Command Line Interface

Example

To show all lines, enter this command:

```
Console#show line
Console configuration:
  Password threshold: 3 times
  Interactive timeout: Disabled
  Silent time: Disabled
  Baudrate: 9600
  Databits: 8
  Parity: none
  Stopbits: 1
Vty configuration:
  Password threshold: 3 times
  Interactive timeout: 65535
```

General Commands

Table 4-6 General Commands

Command	Function	Mode	Page
enable	Activates privileged mode	NE	4-20
disable	Returns to normal mode from privileged mode	PE	4-21
configure	Activates global configuration mode	PE	4-22
show history	Shows the command history buffer	NE, PE	4-22
reload	Restarts the system	PE	4-23
end	Returns to Privileged Exec mode	any config. mode	4-23
exit	Returns to the previous configuration mode, or exits the CLI	any	4-24
quit	Exits a CLI session	NE, PE	4-24
help	Shows how to use help	any	NA
?	Shows options for command completion (context sensitive)	any	NA

enable

This command activates Privileged Exec mode. In privileged mode, additional commands are available, and certain commands display additional information. See “Understanding Command Modes” on page 4-6.

Syntax

enable [*level*]

level - Privilege level to log into the device.

The device has two predefined privilege levels: 0: Normal Exec, 15: Privileged Exec. Enter level 15 to access Privileged Exec mode.

Default Setting

Level 15

Command Mode

Normal Exec

Command Usage

- “super” is the default password required to change the command mode from Normal Exec to Privileged Exec. (To set this password, see the **enable password** command on page 4-28.)
- The “#” character is appended to the end of the prompt to indicate that the system is in privileged access mode.

Example

```
Console>enable
Password: [privileged level password]
Console#
```

Related Commands

disable (4-21)

enable password (4-28)

disable

This command returns to Normal Exec mode from privileged mode. In normal access mode, you can only display basic information on the switch's configuration or Ethernet statistics. To gain access to all commands, you must use the privileged mode. See “Understanding Command Modes” on page 4-6.

Default Setting

None

Command Mode

Privileged Exec

Command Usage

The “>” character is appended to the end of the prompt to indicate that the system is in normal access mode.

Example

```
Console#disable
Console>
```

Related Commands

enable (4-20)

4 Command Line Interface

configure

This command activates Global Configuration mode. You must enter this mode to modify any settings on the switch. You must also enter Global Configuration mode prior to enabling some of the other configuration modes, including Interface Configuration, Line Configuration, VLAN Database Configuration, and Multiple Spanning Tree Configuration. See “Understanding Command Modes” on page 4-6.

Default Setting

None

Command Mode

Privileged Exec

Example

```
Console#configure
Console(config)#
```

Related Commands

end (4-23)

show history

This command shows the contents of the command history buffer.

Default Setting

None

Command Mode

Normal Exec, Privileged Exec

Command Usage

The history buffer size is fixed at 10 Execution commands and 10 Configuration commands.

Example

In this example, the show history command lists the contents of the command history buffer:

```
Console#show history
Execution command history:
 2 config
 1 show history

Configuration command history:
 4 interface vlan 1
 3 exit
 2 interface vlan 1
 1 end

Console#
```

The **!** command repeats commands from the Execution command history buffer when you are in Normal Exec or Privileged Exec Mode, and commands from the Configuration command history buffer when you are in any of the configuration modes. In this example, the **!2** command repeats the second command in the Execution history buffer (**config**).

```
Console#!2
Console#config
Console(config)#
```

reload

This command restarts the system.

Note: When the system is restarted, it will always run the Power-On Self-Test. It will also retain all configuration information stored in non-volatile memory by the **copy running-config startup-config** command.

Default Setting

None

Command Mode

Privileged Exec

Command Usage

This command resets the entire system.

Example

This example shows how to reset the switch:

```
Console#reload
System will be restarted, continue <y/n>? y
```

end

This command returns to Privileged Exec mode.

Default Setting

None

Command Mode

Global Configuration, Interface Configuration, Line Configuration, VLAN Database Configuration, and Multiple Spanning Tree Configuration.

Example

This example shows how to return to the Privileged Exec mode from the Interface Configuration mode:

```
Console(config-if)#end
Console#
```

4 Command Line Interface

exit

This command returns to the previous configuration mode or exits the configuration program.

Default Setting

None

Command Mode

Any

Example

This example shows how to return to the Privileged Exec mode from the Global Configuration mode, and then quit the CLI session:

```
Console(config)#exit
Console#exit

Press ENTER to start session
User Access Verification

Username:
```

quit

This command exits the configuration program.

Default Setting

None

Command Mode

Normal Exec, Privileged Exec

Command Usage

The **quit** and **exit** commands can both exit the configuration program.

Example

This example shows how to quit a CLI session:

```
Console#quit

Press ENTER to start session
User Access Verification

Username:
```

System Management Commands

These commands are used to control system logs, passwords, user names, browser configuration options, and display or configure a variety of other system information.

Table 4-7 System Management Commands

Command Group	Function	Page
Device Designation	Configures information that uniquely identifies this switch	4-25
User Access	Configures the basic user names and passwords for management access	4-26
IP Filter	Configures IP addresses that are allowed management access	4-29
Web Server	Enables management access via a web browser	4-31
Telnet Server	Enables management access via Telnet	4-34
Secure Shell	Provides secure replacement for Telnet	4-35
Event Logging	Controls logging of error messages	4-44
SMTP Alerts	Configures SMTP email alerts	4-49
Time (System Clock)	Sets the system clock automatically via NTP/SNTP server or manually	4-53
System Status	Displays system configuration, active managers, and version information	4-58
Frame Size	Enables support for jumbo frames	4-63

Device Designation Commands

Table 4-8 Device Designation Commands

Command	Function	Mode	Page
prompt	Customizes the prompt used in PE and NE mode	GC	4-25
hostname	Specifies the host name for the switch	GC	4-26
snmp-server contact	Sets the system contact string	GC	4-115
snmp-server location	Sets the system location string	GC	4-116

prompt

This command customizes the CLI prompt. Use the **no** form to restore the default prompt.

Syntax

prompt *string*

no prompt

string - Any alphanumeric string to use for the CLI prompt. (Maximum length: 255 characters)

Default Setting

Console

4 Command Line Interface

Command Mode

Global Configuration

Example

```
Console(config)#prompt RD2
RD2(config)#
```

hostname

This command specifies or modifies the host name for this device. Use the **no** form to restore the default host name.

Syntax

hostname *name*
no hostname

name - The name of this host. (Maximum length: 255 characters)

Default Setting

None

Command Mode

Global Configuration

Example

```
Console(config)#hostname RD#1
Console(config)#
```

User Access Commands

The basic commands required for management access are listed in this section. This switch also includes other options for password checking via the console or a Telnet connection (page 4-11), user authentication via a remote authentication server (page 4-70), and host access authentication for specific ports (page 4-79).

Table 4-9 User Access Commands

Command	Function	Mode	Page
username	Establishes a user name-based authentication system at login	GC	4-27
enable password	Sets a password to control access to the Privileged Exec level	GC	4-28

username

This command adds named users, requires authentication at login, specifies or changes a user's password (or specify that no password is required), or specifies or changes a user's access level. Use the **no** form to remove a user name.

Syntax

```
username name {access-level level | nopassword |
password {0 | 7} password}
no username name
```

- **name** - The name of the user.
(Maximum length: 8 characters, case sensitive. Maximum users: 16)
- **access-level level** - Specifies the user level.
The device has two predefined privilege levels:
0: Normal Exec, **15**: Privileged Exec.
- **nopassword** - No password is required for this user to log in.
- **{0 | 7}** - 0 means plain password, 7 means encrypted password.
- **password password** - The authentication password for the user.
(Maximum length: 8 characters plain text, 32 encrypted, case sensitive)

Default Setting

- The default access level is Normal Exec.
- The factory defaults for the user names and passwords are:

Table 4-10 Default Login Settings

username	access-level	password
guest	0	guest
admin	15	admin

Command Mode

Global Configuration

Command Usage

The encrypted password is required for compatibility with legacy password settings (i.e., plain text or encrypted) when reading the configuration file during system bootup or when downloading the configuration file from a TFTP server. There is no need for you to manually configure encrypted passwords.

Example

This example shows how to set the access level and password for a user.

```
Console(config)#username bob access-level 15
Console(config)#username bob password 0 smith
Console(config)#
```

4 Command Line Interface

enable password

After initially logging onto the system, you should set the Privileged Exec password. Remember to record it in a safe place. This command controls access to the Privileged Exec level from the Normal Exec level. Use the **no** form to reset the default password.

Syntax

enable password [*level level*] {**0** | **7**} *password*
no enable password [*level level*]

- **level level** - Level 15 for Privileged Exec. (Levels 0-14 are not used.)
- {**0** | **7**} - 0 means plain password, 7 means encrypted password.
- *password* - password for this privilege level.
(Maximum length: 8 characters plain text, 32 characters encrypted, case sensitive)

Default Setting

- The default is level 15.
- The default password is "super"

Command Mode

Global Configuration

Command Usage

- You cannot set a null password. You will have to enter a password to change the command mode from Normal Exec to Privileged Exec with the **enable** command (page 4-20).
- The encrypted password is required for compatibility with legacy password settings (i.e., plain text or encrypted) when reading the configuration file during system bootup or when downloading the configuration file from a TFTP server. There is no need for you to manually configure encrypted passwords.

Example

```
Console(config)#enable password level 15 0 admin
Console(config)#
```

Related Commands

enable (4-20)
authentication enable (4-71)

IP Filter Commands

Table 4-11 IP Filter Commands

Command	Function	Mode	Page
management	Configures IP addresses that are allowed management access	GC	4-29
show management	Displays the switch to be monitored or configured from a browser	PE	4-30

management

This command specifies the client IP addresses that are allowed management access to the switch through various protocols. Use the **no** form to restore the default setting.

Syntax

[no] management {all-client | http-client | snmp-client | telnet-client} start-address [end-address]

- **all-client** - Adds IP address(es) to the SNMP, web and Telnet groups.
- **http-client** - Adds IP address(es) to the web group.
- **snmp-client** - Adds IP address(es) to the SNMP group.
- **telnet-client** - Adds IP address(es) to the Telnet group.
- *start-address* - A single IP address, or the starting address of a range.
- *end-address* - The end address of a range.

Default Setting

All addresses

Command Mode

Global Configuration

Command Usage

- If anyone tries to access a management interface on the switch from an invalid address, the switch will reject the connection, enter an event message in the system log, and send a trap message to the trap manager.
- IP address can be configured for SNMP, web and Telnet access respectively. Each of these groups can include up to five different sets of addresses, either individual addresses or address ranges.
- When entering addresses for the same group (i.e., SNMP, web or Telnet), the switch will not accept overlapping address ranges. When entering addresses for different groups, the switch will accept overlapping address ranges.
- You cannot delete an individual address from a specified range. You must delete the entire range, and reenter the addresses.
- You can delete an address range just by specifying the start address, or by specifying both the start address and end address.

4 Command Line Interface

Example

This example restricts management access to the indicated addresses.

```
Console(config)#management all-client 192.168.1.19
Console(config)#management all-client 192.168.1.25 192.168.1.30
Console#
```

show management

This command displays the client IP addresses that are allowed management access to the switch through various protocols.

Syntax

show management {all-client | http-client | snmp-client | telnet-client}

- **all-client** - Adds IP address(es) to the SNMP, web and Telnet groups.
- **http-client** - Adds IP address(es) to the web group.
- **snmp-client** - Adds IP address(es) to the SNMP group.
- **telnet-client** - Adds IP address(es) to the Telnet group.

Command Mode

Privileged Exec

Example

```
Console#show management all-client
Management Ip Filter
Http-Client:
  Start ip address      End ip address
-----
1. 192.168.1.19         192.168.1.19
2. 192.168.1.25         192.168.1.30

Snmp-Client:
  Start ip address      End ip address
-----
1. 192.168.1.19         192.168.1.19
2. 192.168.1.25         192.168.1.30

Telnet-Client:
  Start ip address      End ip address
-----
1. 192.168.1.19         192.168.1.19
2. 192.168.1.25         192.168.1.30
Console#
```

Web Server Commands

Table 4-12 Web Server Commands

Command	Function	Mode	Page
ip http port	Specifies the port to be used by the web browser interface	GC	4-31
ip http server	Allows the switch to be monitored or configured from a browser	GC	4-31
ip http secure-server	Enables HTTPS (HTTP/SSL) for encrypted communications	GC	4-32
ip http secure-port	Specifies the UDP port number for HTTPS/SSL	GC	4-33

ip http port

This command specifies the TCP port number used by the web browser interface. Use the **no** form to use the default port.

Syntax

```
ip http port port-number
no ip http port
```

port-number - The TCP port to be used by the browser interface.
(Range: 1-65535)

Default Setting

80

Command Mode

Global Configuration

Example

```
Console(config)#ip http port 769
Console(config)#
```

Related Commands

ip http server (4-31)

ip http server

This command allows this device to be monitored or configured from a browser. Use the **no** form to disable this function.

Syntax

```
[no] ip http server
```

Default Setting

Enabled

Command Mode

Global Configuration

Example

```
Console(config)#ip http server
Console(config)#
```

Related Commands

ip http port (4-31)

ip http secure-server

This command enables the secure hypertext transfer protocol (HTTPS) over the Secure Socket Layer (SSL), providing secure access (i.e., an encrypted connection) to the switch's web interface. Use the **no** form to disable this function.

Syntax

[no] ip http secure-server

Default Setting

Enabled

Command Mode

Global Configuration

Command Usage

- Both HTTP and HTTPS service can be enabled independently on the switch. However, you cannot configure the HTTP and HTTPS servers to use the same UDP port.
- If you enable HTTPS, you must indicate this in the URL that you specify in your browser: **https://device[:port_number]**
- When you start HTTPS, the connection is established in this way:
 - The client authenticates the server using the server's digital certificate.
 - The client and server negotiate a set of security protocols to use for the connection.
 - The client and server generate session keys for encrypting and decrypting data.
- The client and server establish a secure encrypted connection. A padlock icon should appear in the status bar for Internet Explorer 5.x and Netscape Navigator 6.2 or later versions.
- The following web browsers and operating systems currently support HTTPS:

Table 4-13 HTTPS System Support

Web Browser	Operating System
Internet Explorer 5.0 or later	Windows 98, Windows NT (with service pack 6a), Windows 2000, Windows XP
Netscape Navigator 6.2 or later	Windows 98, Windows NT (with service pack 6a), Windows 2000, Windows XP, Solaris 2.6

- To specify a secure-site certificate, see "Replacing the Default Secure-site Certificate" on page 3-49. Also refer to the **copy** command on page 4-64.

Example

```
Console(config)#ip http secure-server
Console(config)#
```

Related Commands

ip http secure-port (4-33)
copy tftp https-certificate (4-64)

ip http secure-port

This command specifies the UDP port number used for HTTPS connection to the switch's web interface. Use the **no** form to restore the default port.

Syntax

ip http secure-port *port_number*
no ip http secure-port

port_number – The UDP port used for HTTPS.
(Range: 1-65535)

Default Setting

443

Command Mode

Global Configuration

Command Usage

- You cannot configure the HTTP and HTTPS servers to use the same port.
- If you change the HTTPS port number, clients attempting to connect to the HTTPS server must specify the port number in the URL, in this format:

https://device:port_number

Example

```
Console(config)#ip http secure-port 1000
Console(config)#
```

Related Commands

ip http secure-server (4-32)

Telnet Server Commands

Command	Function	Mode	Page
ip telnet port	Specifies the port to be used by the Telnet interface	GC	4-31
ip telnet server	Allows the switch to be monitored or configured from Telnet	GC	4-31

ip telnet port

This command specifies the TCP port number used by the Telnet interface. Use the **no** form to use the default port.

Syntax

```
ip telnet port port-number  
no ip telnet port
```

port-number - The TCP port to be used by the browser interface.
(Range: 1-65535)

Default Setting

23

Command Mode

Global Configuration

Example

```
Console(config)#ip telnet port 123  
Console(config)#
```

Related Commands

ip telnet server (4-34)

ip telnet server

This command allows this device to be monitored or configured from Telnet. Use the **no** form to disable this function.

Syntax

```
[no] ip telnet server
```

Default Setting

Enabled

Command Mode

Global Configuration

Example

```
Console(config)#ip telnet server  
Console(config)#
```

Related Commands

ip telnet port (4-34)

Secure Shell Commands

The Berkley-standard includes remote access tools originally designed for Unix systems. Some of these tools have also been implemented for Microsoft Windows and other environments. These tools, including commands such as *rlogin* (remote login), *rsh* (remote shell), and *rcp* (remote copy), are not secure from hostile attacks.

The Secure Shell (SSH) includes server/client applications intended as a secure replacement for the older Berkley remote access tools. SSH can also provide remote management access to this switch as a secure replacement for Telnet. When a client contacts the switch via the SSH protocol, the switch uses a public-key that the client must match along with a local user name and password for access authentication. SSH also encrypts all data transfers passing between the switch and SSH-enabled management station clients, and ensures that data traveling over the network arrives unaltered.

This section describes the commands used to configure the SSH server. However, note that you also need to install a SSH client on the management station when using this protocol to configure the switch.

Note: The switch supports both SSH Version 1.5 and 2.0 clients.

Table 4-14 Secure Shell Commands

Command	Function	Mode	Page
ip ssh server	Enables the SSH server on the switch	GC	4-37
ip ssh timeout	Specifies the authentication timeout for the SSH server	GC	4-38
ip ssh authentication-retries	Specifies the number of retries allowed by a client	GC	4-38
ip ssh server-key size	Sets the SSH server key size	GC	4-39
copy tftp public-key	Copies the user's public key from a TFTP server to the switch	PE	4-64
delete public-key	Deletes the public key for the specified user	PE	4-39
ip ssh crypto host-key generate	Generates the host key	PE	4-40
ip ssh crypto zeroize	Clear the host key from RAM	PE	4-40
ip ssh save host-key	Saves the host key from RAM to flash memory	PE	4-41
disconnect	Terminates a line connection	PE	4-19
show ip ssh	Displays the status of the SSH server and the configured values for authentication timeout and retries	PE	4-41
show ssh	Displays the status of current SSH sessions	PE	4-42
show public-key	Shows the public key for the specified user or for the host	PE	4-43
show users	Shows SSH users, including privilege level and public key type	PE	4-62

4 Command Line Interface

The SSH server on this switch supports both password and public key authentication. If password authentication is specified by the SSH client, then the password can be authenticated either locally or via a RADIUS or TACACS+ remote authentication server, as specified by the **authentication login** command on page 4-70. If public key authentication is specified by the client, then you must configure authentication keys on both the client and the switch as described in the following section. Note that regardless of whether you use public key or password authentication, you still have to generate authentication keys on the switch and enable the SSH server.

To use the SSH server, complete these steps:

1. Generate a Host Key Pair – Use the **ip ssh crypto host-key generate** command to create a host public/private key pair.
2. Provide Host Public Key to Clients – Many SSH client programs automatically import the host public key during the initial connection setup with the switch. Otherwise, you need to manually create a known hosts file on the management station and place the host public key in it. An entry for a public key in the known hosts file would appear similar to the following example:

```
10.1.0.54 1024 35 15684995401867669259333946775054617325313674890836547254
15020245593199868544358361651999923329781766065830956 10825913212890233
76546801726272571413428762941301196195566782 59566410486957427888146206
51941746772984865468615717739390164779355942303577413098022737087794545
24083971752646358058176716709574804776117
```

3. Import Client's Public Key to the Switch – Use the **copy tftp public-key** command to copy a file containing the public key for all the SSH client's granted management access to the switch. (Note that these clients must be configured locally on the switch with the **username** command as described on page 4-27.) The clients are subsequently authenticated using these keys. The current firmware only accepts public key files based on standard UNIX format as shown in the following example for an RSA Version 1 key:

```
1024 35 1341081685609893921040944920155425347631641921872958921143173880
05553616163105177594083868631109291232226828519254374603100937187721199
69631781366277414168985132049117204830339254324101637997592371449011938
00609025394840848271781943722884025331159521348610229029789827213532671
31629432532818915045306393916643 steve@192.168.1.19
```

4. Set the Optional Parameters – Set other optional parameters, including the authentication timeout, the number of retries, and the server key size.
5. Enable SSH Service – Use the **ip ssh server** command to enable the SSH server on the switch.
6. Configure Challenge-Response Authentication – When an SSH client attempts to contact the switch, the SSH server uses the host key pair to negotiate a session key and encryption method. Only clients that have a private key

corresponding to the public keys stored on the switch can gain access. The following exchanges take place during this process:

- a. The client sends its public key to the switch.
- b. The switch compares the client's public key to those stored in memory.
- c. If a match is found, the switch uses the public key to encrypt a random sequence of bytes, and sends this string to the client.
- d. The client uses its private key to decrypt the bytes, and sends the decrypted bytes back to the switch.
- e. The switch compares the decrypted bytes to the original bytes it sent. If the two sets match, this means that the client's private key corresponds to an authorized public key, and the client is authenticated.

Note: To use SSH with only password authentication, the host public key must still be given to the client, either during initial connection or manually entered into the known host file. However, you do not need to configure the client's keys.

ip ssh server

This command enables the Secure Shell (SSH) server on this switch. Use the **no** form to disable this service.

Syntax

```
[no] ip ssh server
```

Default Setting

Disabled

Command Mode

Global Configuration

Command Usage

- The SSH server supports up to four client sessions. The maximum number of client sessions includes both current Telnet sessions and SSH sessions.
- The SSH server uses DSA or RSA for key exchange when the client first establishes a connection with the switch, and then negotiates with the client to select either DES (56-bit) or 3DES (168-bit) for data encryption.
- You must generate DSA and RSA host keys before enabling the SSH server.

Example

```
Console#ip ssh crypto host-key generate dsa
Console#configure
Console(config)#ip ssh server
Console(config)#
```

Related Commands

```
ip ssh crypto host-key generate (4-40)
show ssh (4-42)
```

4 Command Line Interface

ip ssh timeout

This command configures the timeout for the SSH server. Use the **no** form to restore the default setting.

Syntax

ip ssh timeout *seconds*

no ip ssh timeout

seconds – The timeout for client response during SSH negotiation.
(Range: 1-120)

Default Setting

10 seconds

Command Mode

Global Configuration

Command Usage

The **timeout** specifies the interval the switch will wait for a response from the client during the SSH negotiation phase. Once an SSH session has been established, the timeout for user input is controlled by the **exec-timeout** command for vty sessions.

Example

```
Console(config)#ip ssh timeout 60
Console(config)#
```

Related Commands

exec-timeout (4-15)

show ip ssh (4-41)

ip ssh authentication-retries

This command configures the number of times the SSH server attempts to reauthenticate a user. Use the **no** form to restore the default setting.

Syntax

ip ssh authentication-retries *count*

no ip ssh authentication-retries

count – The number of authentication attempts permitted after which the interface is reset. (Range: 1-5)

Default Setting

3

Command Mode

Global Configuration

Example

```
Console(config)#ip ssh authentication-retires 2
Console(config)#
```

Related Commands

show ip ssh (4-41)

ip ssh server-key size

This command sets the SSH server key size. Use the **no** form to restore the default setting.

Syntax

ip ssh server-key size *key-size*
no ip ssh server-key size

key-size – The size of server key. (Range: 512-896 bits)

Default Setting

768 bits

Command Mode

Global Configuration

Command Usage

- The server key is a private key that is never shared outside the switch.
- The host key is shared with the SSH client, and is fixed at 1024 bits.

Example

```
Console(config)#ip ssh server-key size 512
Console(config)#
```

delete public-key

This command deletes the specified user's public key.

Syntax

delete public-key *username* [**dsa** | **rsa**]

- *username* – Name of an SSH user. (Range: 1-8 characters)
- **dsa** – DSA public key type.
- **rsa** – RSA public key type.

Default Setting

Deletes both the DSA and RSA key.

Command Mode

Privileged Exec

4 Command Line Interface

Example

```
Console#delete public-key admin dsa
Console#
```

ip ssh crypto host-key generate

This command generates the host key pair (i.e., public and private).

Syntax

ip ssh crypto host-key generate [dsa | rsa]

- **dsa** – DSA (Version 2) key type.
- **rsa** – RSA (Version 1) key type.

Default Setting

Generates both the DSA and RSA key pairs.

Command Mode

Privileged Exec

Command Usage

- This command stores the host key pair in memory (i.e., RAM). Use the **ip ssh save host-key** command to save the host key pair to flash memory.
- Some SSH client programs automatically add the public key to the known hosts file as part of the configuration process. Otherwise, you must manually create a known hosts file and place the host public key in it.
- The SSH server uses this host key to negotiate a session key and encryption method with the client trying to connect to it.

Example

```
Console#ip ssh crypto host-key generate dsa
Console#
```

Related Commands

ip ssh crypto zeroize (4-40)
ip ssh save host-key (4-41)

ip ssh crypto zeroize

This command clears the host key from memory (i.e. RAM).

Syntax

ip ssh crypto zeroize [dsa | rsa]

- **dsa** – DSA key type.
- **rsa** – RSA key type.

Default Setting

Clears both the DSA and RSA key.

Command Mode

Privileged Exec

Command Usage

- This command clears the host key from volatile memory (RAM). Use the **no ip ssh save host-key** command to clear the host key from flash memory.
- The SSH server must be disabled before you can execute this command.

Example

```
Console#ip ssh crypto zeroize dsa
Console#
```

Related Commands

- ip ssh crypto host-key generate (4-40)
- ip ssh save host-key (4-41)
- no ip ssh server (4-37)

ip ssh save host-key

This command saves the host key from RAM to flash memory.

Syntax

ip ssh save host-key [dsa | rsa]

- **dsa** – DSA key type.
- **rsa** – RSA key type.

Default Setting

Saves both the DSA and RSA key.

Command Mode

Privileged Exec

Example

```
Console#ip ssh save host-key dsa
Console#
```

Related Commands

- ip ssh crypto host-key generate (4-40)

show ip ssh

This command displays the connection settings used when authenticating client access to the SSH server.

Command Mode

Privileged Exec

4 Command Line Interface

Example

```
Console#show ip ssh
SSH Enabled - version 1.99
Negotiation timeout: 120 secs; Authentication retries: 3
Server key size: 768 bits
Console#
```

show ssh

This command displays the current SSH server connections.

Command Mode

Privileged Exec

Example

```
Console#show ssh
Connection Version State Username Encryption
0 2.0 Session-Started admin ctos aes128-cbc-hmac-md5
stoc aes128-cbc-hmac-md5
Console#
```

Table 4-15 show ssh - display description

Field	Description
Session	The session number. (Range: 0-3)
Version	The Secure Shell version number.
State	The authentication negotiation state. (Values: Negotiation-Started, Authentication-Started, Session-Started)
Username	The user name of the client.
Encryption	The encryption method is automatically negotiated between the client and server. Options for SSHv1.5 include: DES, 3DES Options for SSHv2.0 can include different algorithms for the client-to-server (ctos) and server-to-client (stoc): aes128-cbc-hmac-sha1 aes192-cbc-hmac-sha1 aes256-cbc-hmac-sha1 3des-cbc-hmac-sha1 blowfish-cbc-hmac-sha1 aes128-cbc-hmac-md5 aes192-cbc-hmac-md5 aes256-cbc-hmac-md5 3des-cbc-hmac-md5 blowfish-cbc-hmac-md5 <i>Terminology:</i> DES – Data Encryption Standard (56-bit key) 3DES – Triple-DES (Uses three iterations of DES, 112-bit key) aes – Advanced Encryption Standard (160 or 224-bit key) blowfish – Blowfish (32-448 bit key) cbc – cypher-block chaining sha1 – Secure Hash Algorithm 1 (160-bit hashes) md5 – Message Digest algorithm number 5 (128-bit hashes)

show public-key

This command shows the public key for the specified user or for the host.

Syntax

show public-key [**user** [*username*]] **host**

username – Name of an SSH user. (Range: 1-8 characters)

Default Setting

Shows all public keys.

Command Mode

Privileged Exec

Command Usage

- If no parameters are entered, all keys are displayed. If the user keyword is entered, but no user name is specified, then the public keys for all users are displayed.
- When an RSA key is displayed, the first field indicates the size of the host key (e.g., 1024), the second field is the encoded public exponent (e.g., 35), and the last string is the encoded modulus. When a DSA key is displayed, the first field indicates that the encryption method used by SSH is based on the Digital Signature Standard (DSS), and the last string is the encoded modulus.

Example

```

Console#show public-key host
Host:
RSA:
1024 35
1568499540186766925933394677505461732531367489083654725415020245593199868
5443583616519999233297817660658309586108259132128902337654680172627257141
3428762941301196195566782595664104869574278881462065194174677298486546861
5717739390164779355942303577413098022737087794545240839717526463580581767
16709574804776117
DSA:
ssh-dss AAAB3NzaC1kc3MAAACBAPWKZTPbsRIB8ydEXcxM3dyV/yrDbKStIlnzD/Dg0h2Hxc
YV44sXZ2JXhamLK6P8bvuiyacWbUW/a4PAtp1KMSdqgKeh3hKoA3vRRSy1N2XFfAKx15fwFfv
JlPdOkFgzLGMInvSNYQwiQXbkTBH0Z4mUZpE85PWxDZMaCNBPjBrAAAAFQChb4vsdfQGNIjw
bvwrnLaQ77isiwAAAIEAsy5YWDC99ebYHNRj5kh47wY4i8cZvH+/p9cnrfwFTMU01VFDly3IR
2G395Nly5Qd7ZDxfA9mCOFT/yyEfbbobMJZi8oGCst.SNOxrZZVnMgWrTYfdrKX7YKBw/Kjw6Bm
iFq70+jAhf1Dg45l0Ac27s6TLdtny1wRq/ow2eTCD5nekAAACBAJ8rMccXTxHLFAczWS7EjOy
Dbs1oBfPuSAb4oAsyjKXKVYNLQkTLZfcFRu41bS2KV5LAWecsigP/+DjKGWtPNIQqabKgYCw2
o/dVzX4Gg+yqdTlYmGA7fHGm8ARGeiG4ssFKy4Z6mYPXFum1Yg0fhLwuHpoSKdxT3kk475S7
wOW
Console#

```

Event Logging Commands

Table 4-16 Event Logging Commands

Command	Function	Mode	Page
logging on	Controls logging of error messages	GC	4-44
logging history	Limits syslog messages saved to switch memory based on severity	GC	4-45
logging host	Adds a syslog server host IP address that will receive logging messages	GC	4-46
logging facility	Sets the facility type for remote logging of syslog messages	GC	4-46
logging trap	Limits syslog messages saved to a remote server based on severity	GC	4-47
clear logging	Clears messages from the logging buffer	PE	4-47
show logging	Displays the state of logging	PE	4-48

logging on

This command controls logging of error messages, sending debug or error messages to switch memory. The **no** form disables the logging process.

Syntax

[no] logging on

Default Setting

None

Command Mode

Global Configuration

Command Usage

The logging process controls error messages saved to switch memory. You can use the **logging history** command to control the type of error messages that are stored.

Example

```
Console(config)#logging on
Console(config)#
```

Related Commands

logging history (4-45)
clear logging (4-47)

logging history

This command limits syslog messages saved to switch memory based on severity. The **no** form returns the logging of syslog messages to the default level.

Syntax

logging history {flash | ram} level

no logging history {flash | ram}

- **flash** - Event history stored in flash memory (i.e., permanent memory).
- **ram** - Event history stored in temporary RAM (i.e., memory flushed on power reset).
- **level** - One of the levels listed below. Messages sent include the selected level down to level 0. (Range: 0-7)

Table 4-17 Logging Levels

Level	Severity Name	Description
7	debugging	Debugging messages
6	informational	Informational messages only
5	notifications	Normal but significant condition, such as cold start
4	warnings	Warning conditions (e.g., return false, unexpected return)
3	errors	Error conditions (e.g., invalid input, default used)
2	critical	Critical conditions (e.g., memory allocation, or free memory error - resource exhausted)
1	alerts	Immediate action needed
0	emergencies	System unusable

* There are only Level 2, 5 and 6 error messages for the current firmware release.

Default Setting

Flash: errors (level 3 - 0)

RAM: warnings (level 7 - 0)

Command Mode

Global Configuration

Command Usage

The message level specified for flash memory must be a higher priority (i.e., numerically lower) than that specified for RAM.

Example

```
Console(config)#logging history ram 0
Console(config)#
```

4 Command Line Interface

logging host

This command adds a syslog server host IP address that will receive logging messages. Use the **no** form to remove a syslog server host.

Syntax

[no] logging host *host_ip_address*

host_ip_address - The IP address of a syslog server.

Default Setting

None

Command Mode

Global Configuration

Command Usage

- By using this command more than once you can build up a list of host IP addresses.
- The maximum number of host IP addresses allowed is five.

Example

```
Console(config)#logging host 10.1.0.3
Console(config)#
```

logging facility

This command sets the facility type for remote logging of syslog messages. Use the **no** form to return the type to the default.

Syntax

[no] logging facility *type*

type - A number that indicates the facility used by the syslog server to dispatch log messages to an appropriate service. (Range: 16-23)

Default Setting

23

Command Mode

Global Configuration

Command Usage

The command specifies the facility type tag sent in syslog messages. (See RFC 3164.) This type has no effect on the kind of messages reported by the switch. However, it may be used by the syslog server to sort messages or to store messages in the corresponding database.

Example

```
Console(config)#logging facility 19
Console(config)#
```

logging trap

This command enables the logging of system messages to a remote server, or limits the syslog messages saved to a remote server based on severity. Use this command without a specified level to enable remote logging. Use the **no** form to disable remote logging.

Syntax

```
logging trap [level]  
no logging trap
```

level - One of the syslog severity levels listed in the table on page 4-45. Messages sent include the selected level up through level 0.

Default Setting

Disabled
Level 3 - 0

Command Mode

Global Configuration

Command Usage

- Using this command with a specified level enables remote logging and sets the minimum severity level to be saved.
- Using this command without a specified level also enables remote logging, but restores the minimum severity level to the default.

Example

```
Console(config)#logging trap 4  
Console(config)#
```

clear logging

This command clears messages from the log buffer.

Syntax

```
clear logging [flash | ram]
```

- **flash** - Event history stored in flash memory (i.e., permanent memory).
- **ram** - Event history stored in temporary RAM (i.e., memory flushed on power reset).

Default Setting

Flash and RAM

Command Mode

Privileged Exec

Example

```
Console#clear logging  
Console#
```

4 Command Line Interface

Related Commands

show logging (4-48)

show logging

This command displays the logging configuration, along with any system and event messages stored in memory.

Syntax

show logging {flash | ram | sendmail | trap}

- **flash** - Event history stored in flash memory (i.e., permanent memory).
- **ram** - Event history stored in temporary RAM (i.e., memory flushed on power reset).
- **sendmail** - Displays settings for the SMTP event handler (page 4-52).
- **trap** - Displays settings for the trap function.

Default Setting

None

Command Mode

Privileged Exec

Example

The following example shows that system logging is enabled, the message level for flash memory is “errors” (i.e., default level 3 - 0), the message level for RAM is “debugging” (i.e., default level 7 - 0), and lists one sample error.

```
Console#show logging flash
Syslog logging: Enable
History logging in FLASH: level errors
Console#show logging ram
Syslog logging: Enable
History logging in RAM: level debugging
[0] 0:0:5 1/1/1 PRI_MGR_InitDefault function fails."
    level: 3, module: 13, function: 0, and event no.: 0
Console#
```

Table 4-18 show logging flash - display description

Field	Description
Syslog logging	Shows if system logging has been enabled via the logging on command.
History logging in FLASH	The message level(s) reported based on the logging history command.
History logging in RAM	The message level(s) reported based on the logging history command.
Messages	Any system and event messages stored in memory.

The following example displays settings for the trap function.

```

Console#show logging trap
Syslog logging: Enable
REMOTELOG status: disable
REMOTELOG facility type: local use 7
REMOTELOG level type: Debugging messages
REMOTELOG server IP address: 1.2.3.4
REMOTELOG server IP address: 0.0.0.0
REMOTELOG server IP address: 0.0.0.0
REMOTELOG server IP address: 0.0.0.0
REMOTELOG server IP address: 0.0.0.0
Console#

```

Table 4-19 show logging trap - display description

Field	Description
Syslog logging	Shows if system logging has been enabled via the logging on command.
REMOTELOG status	Shows if remote logging has been enabled via the logging trap command.
REMOTELOG facility type	The facility type for remote logging of syslog messages as specified in the logging facility command.
REMOTELOG level type	The severity threshold for syslog messages sent to a remote server as specified in the logging trap command.
REMOTELOG server IP address	The address of syslog servers as specified in the logging host command.

Related Commands

show logging sendmail (4-52)

SMTP Alert Commands

These commands configure SMTP event handling, and forwarding of alert messages to the specified SMTP servers and email recipients.

Table 4-20 SMTP Alert Commands

Command	Function	Mode	Page
logging sendmail host	SMTP servers to receive alert messages	GC	4-50
logging sendmail level	Severity threshold used to trigger alert messages	GC	4-50
logging sendmail source-email	Email address used for "From" field of alert messages	GC	4-51
logging sendmail destination-email	Email recipients of alert messages	GC	4-51
logging sendmail	Enables SMTP event handling	GC	4-52
show logging sendmail	Displays SMTP event handler settings	NE, PE	4-52

logging sendmail host

This command specifies SMTP servers that will be sent alert messages. Use the **no** form to remove an SMTP server.

Syntax

[no] logging sendmail host *ip_address*

ip_address - IP address of an SMTP server that will be sent alert messages for event handling.

Default Setting

None

Command Mode

Global Configuration

Command Usage

- You can specify up to three SMTP servers for event handling. However, you must enter a separate command to specify each server.
- To send email alerts, the switch first opens a connection, sends all the email alerts waiting in the queue one by one, and finally closes the connection.
- To open a connection, the switch first selects the server that successfully sent mail during the last connection, or the first server configured by this command. If it fails to send mail, the switch selects the next server in the list and tries to send mail again. If it still fails, the system will repeat the process at a periodic interval. (A trap will be triggered if the switch cannot successfully open a connection.)

Example

```
Console(config)#logging sendmail host 192.168.1.19
Console(config)#
```

logging sendmail level

This command sets the severity threshold used to trigger alert messages.

Syntax

logging sendmail level *level*

level - One of the system message levels (page 4-45). Messages sent include the selected level down to level 0. (Range: 0-7; Default: 7)

Default Setting

Level 7

Command Mode

Global Configuration

Command Usage

The specified level indicates an event threshold. All events at this level or higher will be sent to the configured email recipients. (For example, using Level 7 will report all events from level 7 to level 0.)

Example

This example will send email alerts for system errors from level 3 through 0.

```
Console(config)#logging sendmail level 3
Console(config)#
```

logging sendmail source-email

This command sets the email address used for the “From” field in alert messages.

Syntax

logging sendmail source-email *email-address*

email-address - The source email address used in alert messages.
(Range: 1-41 characters)

Default Setting

None

Command Mode

Global Configuration

Command Usage

You may use an symbolic email address that identifies the switch, or the address of an administrator responsible for the switch.

Example

```
Console(config)#logging sendmail source-email bill@this-company.com
Console(config)#
```

logging sendmail destination-email

This command specifies the email recipients of alert messages. Use the **no** form to remove a recipient.

Syntax

[no] logging sendmail destination-email *email-address*

email-address - The source email address used in alert messages.
(Range: 1-41 characters)

Default Setting

None

Command Mode

Global Configuration

4 Command Line Interface

Command Usage

You can specify up to five recipients for alert messages. However, you must enter a separate command to specify each recipient.

Example

```
Console(config)#logging sendmail destination-email ted@this-company.com
Console(config)#
```

logging sendmail

This command enables SMTP event handling. Use the **no** form to disable this function.

Syntax

[no] logging sendmail

Default Setting

Enabled

Command Mode

Global Configuration

Example

```
Console(config)#logging sendmail
Console(config)#
```

show logging sendmail

This command displays the settings for the SMTP event handler.

Command Mode

Normal Exec, Privileged Exec

Example

```
Console#show logging sendmail
SMTP servers
-----
192.168.1.19
SMTP minimum severity level: 7

SMTP destination email addresses
-----
ted@this-company.com

SMTP source email address: bill@this-company.com

SMTP status: Enable

Console#
```


Time Commands

The system clock can be dynamically set by polling a set of specified time servers (NTP or SNTP). Maintaining an accurate time on the switch enables the system log to record meaningful dates and times for event entries. If the clock is not set, the switch will only record the time from the factory default set at the last bootup.

Table 4-21 Time Commands

Command	Function	Mode	Page
sntp client	Accepts time from specified time servers	GC	4-53
sntp server	Specifies one or more time servers	GC	4-54
sntp poll	Sets the interval at which the client polls for time	GC	4-55
show sntp	Shows current SNTP configuration settings	NE, PE	4-55
clock timezone	Sets the time zone for the switch's internal clock	GC	4-56
calendar set	Sets the system date and time	PE	4-56
show calendar	Displays the current date and time setting	NE, PE	4-57

sntp client

This command enables SNTP client requests for time synchronization from NTP or SNTP time servers specified with the **sntp servers** command. Use the **no** form to disable SNTP client requests.

Syntax

[no] sntp client

Default Setting

Disabled

Command Mode

Global Configuration

Command Usage

- The time acquired from time servers is used to record accurate dates and times for log events. Without SNTP, the switch only records the time starting from the factory default set at the last bootup (i.e., 00:00:00, Jan. 1, 2001).
- This command enables client time requests to time servers specified via the **sntp servers** command. It issues time synchronization requests based on the interval set via the **sntp poll** command.

4 Command Line Interface

Example

```
Console(config)#sntp server 10.1.0.19
Console(config)#sntp poll 60
Console(config)#sntp client
Console(config)#end
Console#show sntp
Current time: Dec 23 02:52:44 2002
Poll interval: 60
Current mode: unicast
SNTP status : Enabled
SNTP server 137.92.140.80 0.0.0.0 0.0.0.0
Current server: 137.92.140.80
Console#
```

Related Commands

- sntp server (4-54)
- sntp poll (4-55)
- show sntp (4-55)

sntp server

This command sets the IP address of the servers to which SNTP time requests are issued. Use the this command with no arguments to clear all time servers from the current list.

Syntax

sntp server [*ip1* [*ip2* [*ip3*]]]

ip - IP address of an time server (NTP or SNTP).
(Range: 1 - 3 addresses)

Default Setting

None

Command Mode

Global Configuration

Command Usage

This command specifies time servers from which the switch will poll for time updates when set to SNTP client mode. The client will poll the time servers in the order specified until a response is received. It issues time synchronization requests based on the interval set via the **sntp poll** command.

Example

```
Console(config)#sntp server 10.1.0.19
Console#
```

Related Commands

sntp client (4-53)
sntp poll (4-55)
show sntp (4-55)

sntp poll

This command sets the interval between sending time requests when the switch is set to SNTP client mode. Use the **no** form to restore to the default.

Syntax

sntp poll *seconds*
no sntp poll

seconds - Interval between time requests. (Range: 16-16384 seconds)

Default Setting

16 seconds

Command Mode

Global Configuration

Example

```
Console(config)#sntp poll 60  
Console#
```

Related Commands

sntp client (4-53)

show sntp

This command displays the current time and configuration settings for the SNTP client, and indicates whether or not the local time has been properly updated.

Command Mode

Normal Exec, Privileged Exec

Command Usage

This command displays the current time, the poll interval used for sending time synchronization requests, and the current SNTP mode (i.e., unicast).

Example

```
Console#show sntp  
Current time: Dec 23 05:13:28 2002  
Poll interval: 16  
Current mode: unicast  
SNTP status : Enabled  
SNTP server 137.92.140.80 0.0.0.0 0.0.0.0  
Current server: 137.92.140.80  
Console#
```

clock timezone

This command sets the time zone for the switch's internal clock.

Syntax

clock timezone *name* **hour** *hours* **minute** *minutes* {**before-utc** | **after-utc**}

- *name* - Name of timezone, usually an acronym. (Range: 1-29 characters)
- *hours* - Number of hours before/after UTC. (Range: 1-12 hours)
- *minutes* - Number of minutes before/after UTC. (Range: 0-59 minutes)
- **before-utc** - Sets the local time zone before (east) of UTC.
- **after-utc** - Sets the local time zone after (west) of UTC.

Default Setting

None

Command Mode

Global Configuration

Command Usage

This command sets the local time zone relative to the Coordinated Universal Time (UTC, formerly Greenwich Mean Time or GMT), based on the earth's prime meridian, zero degrees longitude. To display a time corresponding to your local time, you must indicate the number of hours and minutes your time zone is east (before) or west (after) of UTC.

Example

```
Console(config)#clock timezone Japan hours 8 minute 0 after-UTC
Console(config)#
```

Related Commands

show snmp (4-55)

calendar set

This command sets the system clock. It may be used if there is no time server on your network, or if you have not configured the switch to receive signals from a time server.

Syntax

calendar set *hour min sec* {*day month year* | *month day year*}

- *hour* - Hour in 24-hour format. (Range: 0 - 23)
- *min* - Minute. (Range: 0 - 59)
- *sec* - Second. (Range: 0 - 59)
- *day* - Day of month. (Range: 1 - 31)
- *month* - **january** | **february** | **march** | **april** | **may** | **june** | **july** | **august** | **september** | **october** | **november** | **december**
- *year* - Year (4-digit). (Range: 2001 - 2100)

Default Setting

None

Command Mode

Privileged Exec

Example

This example shows how to set the system clock to 15:12:34, February 1st, 2002.

```
Console#calendar set 15:12:34 1 February 2002
Console#
```

show calendar

This command displays the system clock.

Default Setting

None

Command Mode

Normal Exec, Privileged Exec

Example

```
Console#show calendar
 15:12:34 February 1 2002
Console#
```

System Status Commands

Table 4-22 System Status Commands

Command	Function	Mode	Page
show startup-config	Displays the contents of the configuration file (stored in flash memory) that is used to start up the system	PE	4-58
show running-config	Displays the configuration data currently in use	PE	4-59
show system	Displays system information	NE, PE	4-61
show users	Shows all active console and Telnet sessions, including user name, idle time, and IP address of Telnet clients	NE, PE	4-62
show version	Displays version information for the system	NE, PE	4-62

show startup-config

This command displays the configuration file stored in non-volatile memory that is used to start up the system.

Default Setting

None

Command Mode

Privileged Exec

Command Usage

- Use this command in conjunction with the **show running-config** command to compare the information in running memory to the information stored in non-volatile memory.
- This command displays settings for key command modes. Each mode group is separated by “!” symbols, and includes the configuration mode command, and corresponding commands. This command displays the following information:
 - SNMP community strings
 - Users (names and access levels)
 - VLAN database (VLAN ID, name and state)
 - VLAN configuration settings for each interface
 - Multiple spanning tree instances (name and interfaces)
 - IP address configured for VLANs
 - Routing protocol configuration settings
 - Spanning tree settings
 - Any configured settings for the console port and Telnet

Example

```
Console#show startup-config
building startup-config, please wait.....
!
!
username admin access-level 15
username admin password 7 21232f297a57a5a743894a0e4a801fc3
!
username guest access-level 0
username guest password 7 084e0343a0486ff05530df6c705c8bb4
!
enable password level 15 7 1b3231655cebb7a1f783eddf27d254ca
!
snmp-server community public ro
snmp-server community private rw!
!
vlan database
  vlan 1 name DefaultVlan media ethernet state active
!
interface vlan 1
  ip address dhcp
!
line console
!
line vty
!
end
Console#
```

Related Commands

show running-config (4-59)

show running-config

This command displays the configuration information currently in use.

Default Setting

None

Command Mode

Privileged Exec

Command Usage

- Use this command in conjunction with the **show startup-config** command to compare the information in running memory to the information stored in non-volatile memory.
- This command displays settings for key command modes. Each mode group is separated by “!” symbols, and includes the configuration mode command,

4 Command Line Interface

and corresponding commands. This command displays the following information:

- SNMP server settings
- SNMP community strings
- Users (names, access levels, and encrypted passwords)
- VLAN database (VLAN ID, name and state)
- VLAN configuration settings for each interface
- Multiple spanning tree instances (name and interfaces)
- IP address configured for VLANs
- Layer 4 precedence settings
- Routing protocol configuration settings
- Spanning tree settings
- Any configured settings for the console port and Telnet

Example

```
Console#show running-config
building running-config, please wait....
!
SNTP server 0.0.0.0 0.0.0.0 0.0.0.0
!
snmp-server community private rw
snmp-server community public ro
!
username admin access-level 15
username admin password 7 21232f297a57a5a743894a0e4a801fc3
username guest access-level 0
username guest password 7 084e0343a0486ff05530df6c705c8bb4
enable password level 15 7 1b3231655cebb7a1f783eddf27d254ca
!
vlan database
  vlan 1 name DefaultVlan media ethernet state active
!
spanning-tree mst-configuration
!
interface ethernet 1/1
  switchport allowed vlan add 1 untagged
  switchport native vlan 1
:
interface vlan 1
  ip address 10.1.0.1 255.255.255.0
!
no map IP precedence
no map IP DSCP
!
line console
!
line vty
!
end
Console#
```

Related Commands

show startup-config (4-58)

show system

This command displays system information.

Default Setting

None

Command Mode

Normal Exec, Privileged Exec

Command Usage

- For a description of the items shown by this command, refer to “Displaying System Information” on page 3-11.
- The POST results should all display “PASS.” If any POST test indicates “FAIL,” contact your distributor for assistance.

Example

```
Console#show system
System description: LAYER3 12PORT GIGABIT INTELLIGENT SWITCH
System OID string: 1.3.6.1.4.1.4537.73
System information
  System Up time: 0 days, 1 hours, 23 minutes, and 44.61 seconds
  System Name      : [NONE]
  System Location  : [NONE]
  System Contact   : [NONE]
  MAC address      : 00-30-f1-47-58-3a
  Web server       : enable
  Web server port  : 80
  Web secure server : enable
  Web secure server port : 443
  Telnet server    : enable
  Telnet port      : 23
  Jumbo Frame      : Disabled
  POST result
  DUMMY Test 1.....PASS
  UART LOOP BACK Test.....PASS
  DRAM Test.....PASS
  Timer Test.....PASS
  PCI Device 1 Test.....PASS
  Switch Int Loopback test.....PASS

Done All Pass.
Console#
```

4 Command Line Interface

show users

Shows all active console and Telnet sessions, including user name, idle time, and IP address of Telnet client.

Default Setting

None

Command Mode

Normal Exec, Privileged Exec

Command Usage

The session used to execute this command is indicated by a "*" symbol next to the Line (i.e., session) index number.

Example

```
Console#show users
Username accounts:
  Username Privilege Public-Key
  -----
    admin      15      None
    guest       0      None
    steve      15      RSA

Online users:
  Line      Username Idle time (h:m:s) Remote IP addr.
  -----
  0 console  admin      0:14:14
  * 1  VTY 0   admin      0:00:00   192.168.1.19
  2  SSH 1   steve      0:00:06   192.168.1.19

Web online users:
  Line      Remote IP addr Username Idle time (h:m:s).
  -----
  1  HTTP  192.168.1.19  admin      0:00:00

Console#
```

show version

This command displays hardware and software version information for the system.

Default Setting

None

Command Mode

Normal Exec, Privileged Exec

Command Usage

See "Displaying Switch Hardware/Software Versions" on page 3-12 for detailed information on the items displayed by this command.

Example

```

Console#show version
Unit1
  Serial number       : A322043872
  Hardware version    : R01
  Number of ports     :12
  Main power status   :up
  Redundant power status :not present

Agent (master)
  Unit ID             : 1
  Loader version      : 2.1.0.0
  Boot ROM version    : 2.0.5.1
  Operation code version : 1.0.2.31

Console#

```

Frame Size Commands

Table 4-23 Frame Size Commands

Command	Function	Mode	Page
jumbo frame	Enables support for jumbo frames	GC	4-63

jumbo frame

This command enables support for jumbo frames. Use the **no** form to disable it.

Syntax

[no] jumbo frame

Default Setting

Disabled

Command Mode

Global Configuration

Command Usage

- This switch provides more efficient throughput for large sequential data transfers by supporting jumbo frames up to 9216 bytes. Compared to standard Ethernet frames that run only up to 1.5 KB, using jumbo frames significantly reduces the per-packet overhead required to process protocol encapsulation fields.
- To use jumbo frames, both the source and destination end nodes (such as a computer or server) must support this feature. Also, when the connection is operating at full duplex, all switches in the network between the two end nodes must be able to accept the extended frame size. And for half-duplex connections, all devices in the collision domain would need to support jumbo frames.
- The current setting for jumbo frames can be displayed with the **show system** command (page 4-61).

4 Command Line Interface

- Enabling jumbo frames will limit the maximum threshold for broadcast storm control to 64 packets per second. (See the **switchport broadcast** command on page 4-155.)

Example

```
Console(config)#jumbo frame
Console(config)#
```

Flash/File Commands

These commands are used to manage the system code or configuration files.

Table 4-24 Flash/File Commands

Command	Function	Mode	Page
copy	Copies a code image or a switch configuration to or from flash memory or a TFTP server	PE	4-64
delete	Deletes a file or code image	PE	4-67
dir	Displays a list of files in flash memory	PE	4-67
whichboot	Displays the files booted	PE	4-68
boot system	Specifies the file or image used to start up the system	GC	4-69

copy

This command moves (upload/download) a code image or configuration file between the switch's flash memory and a TFTP server. When you save the system code or configuration settings to a file on a TFTP server, that file can later be downloaded to the switch to restore system operation. The success of the file transfer depends on the accessibility of the TFTP server and the quality of the network connection.

Syntax

```
copy file {file | running-config | startup-config | tftp}
copy running-config {file | startup-config | tftp}
copy startup-config {file | running-config | tftp}
copy tftp {file | running-config | startup-config | https-certificate |
public-key}
```

- **file** - Keyword that allows you to copy to/from a file.
- **running-config** - Keyword that allows you to copy to/from the current running configuration.
- **startup-config** - The configuration used for system initialization.
- **tftp** - Keyword that allows you to copy to/from a TFTP server.
- **https-certificate** - Keyword that allows you to copy the HTTPS secure site certificate.
- **public-key** - Keyword that allows you to copy a SSH key from a TFTP server. (See "Secure Shell Commands" on page 35.)

Default Setting

None

Command Mode

Privileged Exec

Command Usage

- The system prompts for data required to complete the copy command.
- The destination file name should not contain slashes (\ or /), the leading letter of the file name should not be a period (.), and the maximum length for file names on the TFTP server is 127 characters or 31 characters for files on the switch. (Valid characters: A-Z, a-z, 0-9, “.”, “-”, “_”)
- Due to the size limit of the flash memory, the switch supports only two operation code files.
- The maximum number of user-defined configuration files depends on available memory.
- You can use “Factory_Default_Config.cfg” as the source to copy from the factory default configuration file, but you cannot use it as the destination.
- To replace the startup configuration, you must use **startup-config** as the destination.
- The Boot ROM and Loader cannot be uploaded or downloaded from the TFTP server. You must follow the instructions in the release notes for new firmware, or contact your distributor for help.
- For information on specifying an https-certificate, see “Replacing the Default Secure-site Certificate” on page 3-49. For information on configuring the switch to use HTTPS for a secure connection, see “ip http secure-server” on page 4-32.

Example

The following example shows how to upload the configuration settings to a file on the TFTP server:

```
Console#copy file tftp
Choose file type:
 1. config:  2. opcode: <1-2>: 1
Source file name: startup
TFTP server ip address: 10.1.0.99
Destination file name: startup.01
TFTP completed.
Success.

Console#
```

4 Command Line Interface

The following example shows how to copy the running configuration to a startup file.

```
Console#copy running-config file
destination file name: startup
Write to FLASH Programming.
\Write to FLASH finish.
Success.

Console#
```

The following example shows how to download a configuration file:

```
Console#copy tftp startup-config
TFTP server ip address: 10.1.0.99
Source configuration file name: startup.01
Startup configuration file name [startup]:
Write to FLASH Programming.

\Write to FLASH finish.
Success.

Console#
```

This example shows how to copy a secure-site certificate from an TFTP server. It then reboots the switch to activate the certificate:

```
Console#copy tftp https-certificate
TFTP server ip address: 10.1.0.19
Source certificate file name: SS-certificate
Source private file name: SS-private
Private password: *****

Success.
Console#reload
System will be restarted, continue <y/n>? y
```

This example shows how to copy a public-key used by SSH from an TFTP server. Note that public key authentication via SSH is only supported for users configured locally on the switch.

```
Console#copy tftp public-key
TFTP server IP address: 192.168.1.19
Choose public key type:
 1. RSA:  2. DSA: <1-2>: 1
Source file name: steve.pub
Username: steve
TFTP Download
Success.
Write to FLASH Programming.
Success.

Console#
```

delete

This command deletes a file or image.

Syntax

delete *filename*

filename - Name of configuration file or code image.

Default Setting

None

Command Mode

Privileged Exec

Command Usage

- If the file type is used for system startup, then this file cannot be deleted.
- "Factory_Default_Config.cfg" cannot be deleted.

Example

This example shows how to delete the test2.cfg configuration file from flash memory.

```
Console#delete test2.cfg
Console#
```

Related Commands

dir (4-67)

delete public-key (4-39)

dir

This command displays a list of files in flash memory.

Syntax

dir [**boot-rom** | **config** | **opcode** [:*filename*]]

The type of file or image to display includes:

- **boot-rom** - Boot ROM (or diagnostic) image file.
- **config** - Switch configuration file.
- **opcode** - Run-time operation code image file.
- *filename* - Name of configuration file or code image. If this file exists but contains errors, information on this file cannot be shown.

Default Setting

None

Command Mode

Privileged Exec

4 Command Line Interface

Command Usage

- If you enter the command **dir** without any parameters, the system displays all files.
- File information is shown below:

Table 4-25 File Directory Information

Column Heading	Description
file name	The name of the file.
file type	File types: Boot-Rom, Operation Code, and Config file.
startup	Shows if this file is used when the system is started.
size	The length of the file in bytes.

Example

The following example shows how to display all file information:

```
Console#dir
           file name      file type startup size (byte)
-----
           D2021 Boot-Rom image      Y      810972
           V10216 Operation Code      Y      2918340
Factory_Default_Config.cfg  Config File      N           455
           startup      Config File      Y           1766
-----
Total free space: 11665408
Console#
```

whichboot

This command displays which files were booted when the system powered up.

Default Setting

None

Command Mode

Privileged Exec

Example

This example shows the information displayed by the **whichboot** command. See the table under the **dir** command for a description of the file information displayed by this command.

```
Console#whichboot
           file name      file type startup size (byte)
-----
           D2021 Boot-Rom image      Y      810972
           V10216 Operation Code      Y      2918340
           startup      Config File      Y           1766
Console#
```


boot system

This command specifies the file or image used to start up the system.

Syntax

boot system {**boot-rom**| **config** | **opcode**}: *filename*

The type of file or image to set as a default includes:

- **boot-rom*** - Boot ROM.
- **config*** - Configuration file.
- **opcode*** - Run-time operation code.
- *filename* - Name of configuration file or code image.

* The colon (:) is required.

Default Setting

None

Command Mode

Global Configuration

Command Usage

- A colon (:) is required after the specified file type.
- If the file contains an error, it cannot be set as the default file.

Example

```
Console(config)#boot system config: startup
Console(config)#
```

Related Commands

dir (4-67)

whichboot (4-68)

Authentication Commands

You can configure this switch to authenticate users logging into the system for management access using local or remote authentication methods. You can also enable port-based authentication for network client access using IEEE 802.1X.

Table 4-26 Authentication Commands

Command Group	Function	Page
Authentication Sequence	Defines logon authentication method and precedence	4-70
RADIUS Client	Configures settings for authentication via a RADIUS server	4-72
TACACS+ Client	Configures settings for authentication via a TACACS+ server	4-75
Port Security	Configures secure addresses for a port	4-77
Port Authentication	Configures host authentication on specific ports using 802.1X	4-79

Authentication Sequence

Table 4-27 Authentication Sequence Commands

Command	Function	Mode	Page
authentication login	Defines logon authentication method and precedence	GC	4-70
authentication enable	Defines the authentication method and precedence for command mode change	GC	4-71

authentication login

This command defines the login authentication method and precedence. Use the **no** form to restore the default.

Syntax

```
authentication login {[local] [radius] [tacacs]}
no authentication login
```

- **local** - Use local password.
- **radius** - Use RADIUS server password.
- **tacacs** - Use TACACS server password.

Default Setting

Local

Command Mode

Global Configuration

Command Usage

- RADIUS uses UDP while TACACS+ uses TCP. UDP only offers best effort delivery, while TCP offers a connection-oriented transport. Also, note that RADIUS encrypts only the password in the access-request packet from the client to the server, while TACACS+ encrypts the entire body of the packet.

- RADIUS and TACACS+ logon authentication assigns a specific privilege level for each user name and password pair. The user name, password, and privilege level must be configured on the authentication server.
- You can specify three authentication methods in a single command to indicate the authentication sequence. For example, if you enter “**authentication login radius tacacs local**,” the user name and password on the RADIUS server is verified first. If the RADIUS server is not available, then authentication is attempted on the TACACS+ server. If the TACACS+ server is not available, the local user name and password is checked.

Example

```
Console(config)#authentication login radius
Console(config)#
```

Related Commands

username - for setting the local user names and passwords (4-27)

authentication enable

This command defines the authentication method and precedence to use when changing from Exec command mode to Privileged Exec command mode with the **enable** command (see page 4-20). Use the **no** form to restore the default.

Syntax

```
authentication enable {[local] [radius] [tacacs]}
no authentication enable
```

- **local** - Use local password only.
- **radius** - Use RADIUS server password only.
- **tacacs** - Use TACACS server password.

Default Setting

Local

Command Mode

Global Configuration

Command Usage

- RADIUS uses UDP while TACACS+ uses TCP. UDP only offers best effort delivery, while TCP offers a connection-oriented transport. Also, note that RADIUS encrypts only the password in the access-request packet from the client to the server, while TACACS+ encrypts the entire body of the packet.
- RADIUS and TACACS+ logon authentication assigns a specific privilege level for each user name and password pair. The user name, password, and privilege level must be configured on the authentication server.
- You can specify three authentication methods in a single command to indicate the authentication sequence. For example, if you enter “**authentication enable radius tacacs local**,” the user name and password on the RADIUS server is verified first. If the RADIUS server is not available, then

4 Command Line Interface

authentication is attempted on the TACACS+ server. If the TACACS+ server is not available, the local user name and password is checked.

Example

```
Console(config)#authentication enable radius
Console(config)#
```

Related Commands

`enable password` - sets the password for changing command modes (4-28)

RADIUS Client

Remote Authentication Dial-in User Service (RADIUS) is a logon authentication protocol that uses software running on a central server to control access to RADIUS-aware devices on the network. An authentication server contains a database of multiple user name/password pairs with associated privilege levels for each user or group that require management access to a switch.

Table 4-28 RADIUS Client Commands

Command	Function	Mode	Page
<code>radius-server host</code>	Specifies the RADIUS server	GC	4-72
<code>radius-server port</code>	Sets the RADIUS server network port	GC	4-73
<code>radius-server key</code>	Sets the RADIUS encryption key	GC	4-73
<code>radius-server retransmit</code>	Sets the number of retries	GC	4-74
<code>radius-server timeout</code>	Sets the interval between sending authentication requests	GC	4-74
<code>show radius-server</code>	Shows the current RADIUS settings	PE	4-74

radius-server host

This command specifies the RADIUS server. Use the **no** form to restore the default.

Syntax

radius-server host *host_ip_address*

no radius-server host

host_ip_address - IP address of server.

Default Setting

10.1.0.1

Command Mode

Global Configuration

Example

```
Console(config)#radius-server host 192.168.1.25
Console(config)#
```

radius-server port

This command sets the RADIUS server network port. Use the **no** form to restore the default.

Syntax

radius-server port *port_number*

no radius-server port

port_number - RADIUS server UDP port used for authentication messages. (Range: 1-65535)

Default Setting

1812

Command Mode

Global Configuration

Example

```
Console(config)#radius-server port 181
Console(config)#
```

radius-server key

This command sets the RADIUS encryption key. Use the **no** form to restore the default.

Syntax

radius-server key *key_string*

no radius-server key

key_string - Encryption key used to authenticate logon access for client. Do not use blank spaces in the string. (Maximum length: 20 characters)

Default Setting

None

Command Mode

Global Configuration

Example

```
Console(config)#radius-server key green
Console(config)#
```

4 Command Line Interface

radius-server retransmit

This command sets the number of retries. Use the **no** form to restore the default.

Syntax

```
radius-server retransmit number_of_retries  
no radius-server retransmit
```

number_of_retries - Number of times the switch will try to authenticate logon access via the RADIUS server. (Range: 1 - 30)

Default Setting

2

Command Mode

Global Configuration

Example

```
Console(config)#radius-server retransmit 5  
Console(config)#
```

radius-server timeout

This command sets the interval between transmitting authentication requests to the RADIUS server. Use the **no** form to restore the default.

Syntax

```
radius-server timeout number_of_seconds  
no radius-server timeout
```

number_of_seconds - Number of seconds the switch waits for a reply before resending a request. (Range: 1-65535)

Default Setting

5

Command Mode

Global Configuration

Example

```
Console(config)#radius-server timeout 10  
Console(config)#
```

show radius-server

This command displays the current settings for the RADIUS server.

Default Setting

None

Command Mode

Privileged Exec

Example

```

Console#show radius-server
Server IP address: 10.1.0.1
Communication key with radius server:
Server port number: 1812
Retransmit times: 2
Request timeout: 5
Console#

```

TACACS+ Client

Terminal Access Controller Access Control System (TACACS+) is a logon authentication protocol that uses software running on a central server to control access to TACACS-aware devices on the network. An authentication server contains a database of multiple user name/password pairs with associated privilege levels for each user or group that require management access to a switch.

Table 4-29 TACACS+ Client Commands

Command	Function	Mode	Page
<code>tacacs-server host</code>	Specifies the TACACS+ server	GC	4-75
<code>tacacs-server port</code>	Specifies the TACACS+ server network port	GC	4-76
<code>tacacs-server key</code>	Sets the TACACS+ encryption key	GC	4-76
<code>show tacacs-server</code>	Shows the current TACACS+ settings	GC	4-77

tacacs-server host

This command specifies the TACACS+ server. Use the **no** form to restore the default.

Syntax

tacacs-server host *host_ip_address*

no tacacs-server host

host_ip_address - IP address of a TACACS+ server.

Default Setting

10.11.12.13

Command Mode

Global Configuration

Example

```

Console(config)#tacacs-server host 192.168.1.25
Console(config)#

```

4 Command Line Interface

tacacs-server port

This command specifies the TACACS+ server network port. Use the **no** form to restore the default.

Syntax

tacacs-server port *port_number*

no tacacs-server port

port_number - TACACS+ server TCP port used for authentication messages. (Range: 1-65535)

Default Setting

49

Command Mode

Global Configuration

Example

```
Console(config)#tacacs-server port 181
Console(config)#
```

tacacs-server key

This command sets the TACACS+ encryption key. Use the **no** form to restore the default.

Syntax

tacacs-server key *key_string*

no tacacs-server key

key_string - Encryption key used to authenticate logon access for the client. Do not use blank spaces in the string.
(Maximum length: 20 characters)

Default Setting

None

Command Mode

Global Configuration

Example

```
Console(config)#tacacs-server key green
Console(config)#
```


show tacacs-server

This command displays the current settings for the TACACS+ server.

Default Setting

None

Command Mode

Privileged Exec

Example

```
Console#show tacacs-server
Remote TACACS server configuration:
  Server IP address: 10.11.12.13
  Communication key with TACACS server: green
  Server port number: 49
Console#
```

Port Security Commands

These commands can be used to enable port security on a port. When using port security, the switch stops learning new MAC addresses on the specified port when it has reached a configured maximum number. Only incoming traffic with source addresses already stored in the dynamic or static address table for this port will be authorized to access the network. The port will drop any incoming frames with a source MAC address that is unknown or has been previously learned from another port. If a device with an unauthorized MAC address attempts to use the switch port, the intrusion will be detected and the switch can automatically take action by disabling the port and sending a trap message.

Table 4-30 Port Security Commands

Command	Function	Mode	Page
port security	Configures a secure port	IC	4-78
mac-address-table static	Maps a static address to a port in a VLAN	GC	4-166
show mac-address-table	Displays entries in the bridge-forwarding database	PE	4-167

port security

This command enables or configures port security. Use the **no** form without any keywords to disable port security. Use the **no** form with the appropriate keyword to restore the default settings for a response to security violation or for the maximum number of allowed addresses.

Syntax

```
port security [action {shutdown | trap | trap-and-shutdown}  
| max-mac-count address-count]  
no port security [action | max-mac-count]
```

- **action** - Response to take when port security is violated.
 - **shutdown** - Disable port only.
 - **trap** - Issue SNMP trap message only.
 - **trap-and-shutdown** - Issue SNMP trap message and disable port.
- **max-mac-count**
 - *address-count* - The maximum number of MAC addresses that can be learned on a port. (Range: 0 - 1024, where 0 means disabled)

Default Setting

Status: Disabled
Action: None
Maximum Addresses: 0

Command Mode

Interface Configuration (Ethernet)

Command Usage

- If you enable port security, the switch stops learning new MAC addresses on the specified port when it has reached a configured maximum number. Only incoming traffic with source addresses already stored in the dynamic or static address table will be accepted.
- First use the **port security max-mac-count** command to set the number of addresses, and then use the **port security** command to enable security on the port.
- Use the **no port security max-mac-count** command to disable port security and reset the maximum number of addresses to the default.
- You can also manually add secure addresses with the **mac-address-table static** command.
- A secure port has the following restrictions:
 - Cannot use port monitoring.
 - Cannot be a multi-VLAN port.
 - Cannot be connected to a network interconnection device.
 - Cannot be a trunk port.
- If a port is disabled due to a security violation, it must be manually re-enabled using the **no shutdown** command.

Example

The following example enables port security for port 5, and sets the response to a security violation to issue a trap message:

```
Console(config)#interface ethernet 1/5
Console(config-if)#port security action trap
```

Related Commands

- shutdown (4-154)
- mac-address-table static (4-166)
- show mac-address-table (4-167)

802.1X Port Authentication

The switch supports IEEE 802.1X (dot1x) port-based access control that prevents unauthorized access to the network by requiring users to first submit credentials for authentication. Client authentication is controlled centrally by a RADIUS server using EAP (Extensible Authentication Protocol).

Table 4-31 802.1X Port Authentication Commands

Command	Function	Mode	Page
authentication dot1x default	Sets the default authentication server type	GC	4-80
dot1x default	Resets all dot1x parameters to their default values	GC	4-80
dot1x max-req	Sets the maximum number of times that the switch retransmits an EAP request/identity packet to the client before it times out the authentication session	GC	4-80
dot1x port-control	Sets dot1x mode for a port interface	IC	4-81
dot1x operation-mode	Allows single or multiple hosts on an dot1x port	IC	4-82
dot1x re-authenticate	Forces re-authentication on specific ports	PE	4-82
dot1x re-authentication	Enables re-authentication for all ports	GC	4-83
dot1x timeout quiet-period	Sets the time that a switch port waits after the Max Request Count has been exceeded before attempting to acquire a new client	GC	4-83
dot1x timeout re-authperiod	Sets the time period after which a connected client must be re-authenticated	GC	4-84
dot1x timeout tx-period	Sets the time period during an authentication session that the switch waits before re-transmitting an EAP packet	GC	4-84
show dot1x	Shows all dot1x related information	PE	4-85

4 Command Line Interface

authentication dot1x default

This command sets the default authentication server type. Use the **no** form to restore the default.

Syntax

```
authentication dot1x default radius
no authentication dot1x
```

Default Setting

RADIUS

Command Mode

Global Configuration

Example

```
Console(config)#authentication dot1x default radius
Console(config)#
```

dot1x default

This command sets all configurable dot1x global and port settings to their default values.

Command Mode

Global Configuration

Example

```
Console(config)#dot1x default
Console(config)#
```

dot1x max-req

This command sets the maximum number of times the switch port will retransmit an EAP request/identity packet to the client before it times out the authentication session. Use the **no** form to restore the default.

Syntax

```
dot1x max-req count
no dot1x max-req
```

count – The maximum number of requests (Range: 1-10)

Default

2

Command Mode

Global Configuration

Example

```
Console(config)#dot1x max-req 2
Console(config)#
```

dot1x port-control

This command sets the dot1x mode on a port interface. Use the **no** form to restore the default.

Syntax

dot1x port-control {auto | force-authorized | force-unauthorized}
no dot1x port-control

- **auto** – Requires a dot1x-aware connected client to be authorized by the RADIUS server. Clients that are not dot1x-aware will be denied access.
- **force-authorized** – Configures the port to grant access to all clients, either dot1x-aware or otherwise.
- **force-unauthorized** – Configures the port to deny access to all clients, either dot1x-aware or otherwise.

Default

force-authorized

Command Mode

Interface Configuration

Example

```
Console(config)#interface eth 1/2
Console(config-if)#dot1x port-control auto
Console(config-if)#
```

4 Command Line Interface

dot1x operation-mode

This command allows single or multiple hosts (clients) to connect to an 802.1X-authorized port. Use the **no** form with no keywords to restore the default to single host. Use the **no** form with the **multi-host max-count** keywords to restore the default maximum count.

Syntax

```
dot1x operation-mode {single-host | multi-host [max-count count]}  
no dot1x operation-mode [multi-host max-count]
```

- **single-host** – Allows only a single host to connect to this port.
- **multi-host** – Allows multiple host to connect to this port.
- **max-count** – Keyword for the maximum number of hosts.
 - *count* – The maximum number of hosts that can connect to a port. (Range: 1-1024; Default: 5)

Default

Single-host

Command Mode

Interface Configuration

Command Usage

- The “max-count” parameter specified by this command is only effective if the dot1x mode is set to “auto” by the dot1x port-control command (page 4-105).
- In “multi-host” mode, only one host connected to a port needs to pass authentication for all other hosts to be granted network access. Similarly, a port can become unauthorized for all hosts if one attached host fails re-authentication or sends an EAPOL logoff message.

Example

```
Console(config)#interface eth 1/2  
Console(config-if)#dot1x operation-mode multi-host max-count 10  
Console(config-if)#
```

dot1x re-authenticate

This command forces re-authentication on all ports or a specific interface.

Syntax

```
dot1x re-authenticate [interface]
```

interface

- **ethernet unit/port**
 - *unit* - This is device 1.
 - *port* - Port number.

Command Mode

Privileged Exec

Example

```
Console#dot1x re-authenticate
Console#
```

dot1x re-authentication

This command enables periodic re-authentication globally for all ports. Use the **no** form to disable re-authentication.

Syntax

[no] dot1x re-authentication

Command Mode

Global Configuration

Example

```
Console(config)#dot1x re-authentication
Console(config)#
```

dot1x timeout quiet-period

This command sets the time that a switch port waits after the Max Request Count has been exceeded before attempting to acquire a new client. Use the **no** form to reset the default.

Syntax

dot1x timeout quiet-period *seconds*
no dot1x timeout quiet-period

seconds - The number of seconds. (Range: 1-65535)

Default

60 seconds

Command Mode

Global Configuration

Example

```
Console(config)#dot1x timeout quiet-period 350
Console(config)#
```

4 Command Line Interface

dot1x timeout re-authperiod

This command sets the time period after which a connected client must be re-authenticated.

Syntax

dot1x timeout re-authperiod *seconds*
no dot1x timeout re-authperiod

seconds - The number of seconds. (Range: 1-65535)

Default

3600 seconds

Command Mode

Global Configuration

Example

```
Console(config)#dot1x timeout re-authperiod 300  
Console(config)#
```

dot1x timeout tx-period

This command sets the time that the switch waits during an authentication session before re-transmitting an EAP packet. Use the **no** form to reset to the default value.

Syntax

dot1x timeout tx-period *seconds*
no dot1x timeout tx-period

seconds - The number of seconds. (Range: 1-65535)

Default

30 seconds

Command Mode

Global Configuration

Example

```
Console(config)#dot1x timeout tx-period 300  
Console(config)#
```


show dot1x

This command shows general port authentication related settings on the switch or a specific interface.

Syntax

show dot1x [statistics] [interface *interface*]

- **statistics** - Displays dot1x status for each port.
- **interface**
 - **ethernet *unit/port***
 - *unit* - This is device 1.
 - *port* - Port number.

Command Mode

Privileged Exec

Command Usage

This command displays the following information:

- **Global 802.1X Parameters** – Displays the global port access control parameters that can be configured for this switch as described in the preceding pages, including reauth-enabled (page 4-83), reauth-period (page 4-84), quiet-period (page 4-83), tx-period (page 4-84), and max-reg (page 4-80). It also displays the following global parameters which are set to a fixed value, including the following items:
 - **supp-timeout** – Supplicant timeout.
 - **server-timeout** – Server timeout.
 - **reauth-max** – Maximum number of reauthentication attempts.
- **802.1X Port Summary** – Displays the port access control parameters for each interface, including the following items:
 - **Status** – Administrative state for port access control.
 - **Mode** – Dot1x port control mode (page 4-81).
 - **Authorized** – Authorization status (yes or n/a - not authorized).
- **802.1X Port Details** – Displays detailed port access control settings for each interface as described in the preceding pages, including administrative status for port access control, Operation mode (page 4-82), Max count (page 4-82), and Port Control (page 4-81). It also displays the following information:
 - **Status** – Authorization status (authorized or unauthorized).
 - **Supplicant** – MAC address of authorized client.
 - **Current Identifier** – Current unit among multiple hosts
- **Authenticator State Machine**
 - **State** – Current state (including initialize, disconnected, connecting, authenticating, authenticated, aborting, held, force_authorized, force_unauthorized).
 - **Reauth Count** – Number of times connecting state is re-entered.

4 Command Line Interface

- *Backend State Machine*
 - State – Current state (including request, response, success, fail, timeout, idle, initialize).
 - Request Count – Number of EAP Request packets sent to the Supplicant without receiving a response.
 - Identifier(Server) – Identifier carried in the most recent EAP Success, Failure or Request packet received from the Authentication Server.
- *Reauthentication State Machine*
 - State – Current state (including initialize, reauthenticate).

Example

```
Console#show dot1x
Global 802.1X Parameters
reauth-enabled: yes
reauth-period: 300
quiet-period: 350
tx-period: 300
supp-timeout: 30
server-timeout: 30
reauth-max: 2
max-req: 2

802.1X Port Summary

Port Name      Status      Operation Mode      Mode      Authorized
-----
1/1 disabled      Single-Host      ForceAuthorized      yes
1/2 disabled      Single-Host      ForceAuthorized      n/a
:
: 1/11 disabled      Single-Host      ForceAuthorized      yes
1/12 disabled      Single-Host      Auto                  yes

802.1X Port Details

802.1X is disabled on port 1
:
802.1X is enabled on port 12
Status Authorized
Operation mode Single-Host
Max count 5
Port-control Auto
Supplicant 00-e0-29-94-34-65
Current Identifier 4

Authenticator State Machine
State Authenticated
Reauth Count 0

Backend State Machine
State Idle
Request Count 0
Identifier(Server) 3

Reauthentication State Machine
State Initialize
Console#
```

Access Control List Commands

Access Control Lists (ACL) provide packet filtering for IP frames (based on address, protocol, Layer 4 protocol port number or TCP control code) or any frames (based on MAC address or Ethernet type). To filter packets, first create an access list, add the required rules, specify a mask to modify the precedence in which the rules are checked, and then bind the list to a specific port.

Access Control Lists

An ACL is a sequential list of permit or deny conditions that apply to IP addresses, MAC addresses, or other more specific criteria. This switch tests ingress or egress packets against the conditions in an ACL one by one. A packet will be accepted as soon as it matches a permit rule, or dropped as soon as it matches a deny rule. If no rules match for a list of all permit rules, the packet is dropped; and if no rules match for a list of all deny rules, the packet is accepted.

There are three filtering modes:

- Standard IP ACL mode (STD-ACL) filters packets based on the source IP address.
- Extended IP ACL mode (EXT-ACL) filters packets based on source or destination IP address, as well as protocol type and protocol port number. If the TCP protocol is specified, then you can also filter packets based on the TCP control code.
- MAC ACL mode (MAC-ACL) filters packets based on the source or destination MAC address and the Ethernet frame type (RFC 1060).

The following restrictions apply to ACLs:

- This switch supports ACLs for both ingress and egress filtering. However, you can only bind one IP ACL and one MAC ACL to any port for ingress filtering, and one IP ACL and one MAC ACL to any port for egress filtering. In other words, only four ACLs can be bound to an interface – Ingress IP ACL, Egress IP ACL, Ingress MAC ACL and Egress MAC ACL.
- When an ACL is bound to an interface as an egress filter, all entries in the ACL must be deny rules. Otherwise, the bind operation will fail.
- Each ACL can have up to 32 rules.
- The maximum number of ACLs is also 32.
- However, due to resource restrictions, the average number of rules bound the ports should not exceed 20.
- You must configure a mask for an ACL rule before you can bind it to a port or set the queue or frame priorities associated with the rule.
- The switch does not support the explicit “deny any any” rule for the egress IP ACL or the egress MAC ACLs. If these rules are included in ACL, and you attempt to bind the ACL to an interface for egress checking, the bind operation will fail.
- Egress MAC ACLs only work for destination-mac-known packets, not for multicast, broadcast, or destination-mac-unknown packets.

4 Command Line Interface

The order in which active ACLs are checked is as follows:

1. User-defined rules in the Egress MAC ACL for egress ports.
2. User-defined rules in the Egress IP ACL for egress ports.
3. User-defined rules in the Ingress MAC ACL for ingress ports.
4. User-defined rules in the Ingress IP ACL for ingress ports.
5. Explicit default rule (permit any any) in the ingress IP ACL for ingress ports.
6. Explicit default rule (permit any any) in the ingress MAC ACL for ingress ports.
7. If no explicit rule is matched, the implicit default is permit all.

Masks for Access Control Lists

You must specify masks that control the order in which ACL rules are checked. The switch includes two system default masks that pass/filter packets matching the permit/deny the rules specified in an ingress ACL. You can also configure up to seven user-defined masks for an ACL. A mask must be bound exclusively to one of the basic ACL types (i.e., Ingress IP ACL, Egress IP ACL, Ingress MAC ACL or Egress MAC ACL), but a mask can be bound to up to four ACLs of the same type.

Table 4-32 Access Control List Commands

Command Groups	Function	Page
IP ACLs	Configures ACLs based on IP addresses, TCP/UDP port number, protocol type, and TCP control code	4-88
MAC ACLs	Configures ACLs based on hardware addresses, packet format, and Ethernet type	4-102
ACL Information	Displays ACLs and associated rules; shows ACLs assigned to each port	4-112

IP ACLs

Table 4-33 IP ACL Commands

Command	Function	Mode	Page
access-list ip	Creates an IP ACL and enters configuration mode for standard or extended IP ACLs	GC	4-89
permit, deny	Filters packets matching a specified source IP address	STD-ACL	4-90
permit, deny	Filters packets meeting the specified criteria, including source and destination IP address, TCP/UDP port number, protocol type, and TCP control code	EXT-ACL	4-91
show ip access-list	Displays the rules for configured IP ACLs	PE	4-93
access-list ip mask-precedence	Changes to the IP Mask mode used to configure access control masks	GC	4-93
mask	Sets a precedence mask for the ACL rules	IP-Mask	4-94
show access-list ip mask-precedence	Shows the ingress or egress rule masks for IP ACLs	PE	4-97
ip access-group	Adds a port to an IP ACL	IC	4-98
show ip access-group	Shows port assignments for IP ACLs	PE	4-98

Table 4-33 IP ACL Commands (Continued)

Command	Function	Mode	Page
map access-list ip	Sets the CoS value and corresponding output queue for packets matching an ACL rule	IC	4-99
show map access-list ip	Shows CoS value mapped to an access list for an interface	PE	4-100
match access-list ip	Changes the 802.1p priority, IP Precedence, or DSCP Priority of a frame matching the defined rule (i.e., also called packet marking)	IC	4-100
show marking	Displays the current configuration for packet marking	PE	4-101

access-list ip

This command adds an IP access list and enters configuration mode for standard or extended IP ACLs. Use the **no** form to remove the specified ACL.

Syntax

[no] access-list ip {standard | extended} *acl_name*

- **standard** – Specifies an ACL that filters packets based on the source IP address.
- **extended** – Specifies an ACL that filters packets based on the source or destination IP address, and other more specific criteria.
- *acl_name* – Name of the ACL. (Maximum length: 16 characters)

Default Setting

None

Command Mode

Global Configuration

Command Usage

- An egress ACL must contain all deny rules.
- When you create a new ACL or enter configuration mode for an existing ACL, use the **permit** or **deny** command to add new rules to the bottom of the list. To create an ACL, you must add at least one rule to the list.
- To remove a rule, use the **no permit** or **no deny** command followed by the exact text of a previously configured rule.
- An ACL can contain up to 32 rules.

Example

```
Console(config)#access-list ip standard david
Console(config-std-acl)#
```

4 Command Line Interface

Related Commands

permit, deny (4-90)
ip access-group (4-98)
show ip access-list (4-93)

permit, deny (Standard ACL)

This command adds a rule to a Standard IP ACL. The rule sets a filter condition for packets emanating from the specified source. Use the **no** form to remove a rule.

Syntax

[no] {permit | deny} {any | source bitmask | host source}

- **any** – Any source IP address.
- **source** – Source IP address.
- **bitmask** – Decimal number representing the address bits to match.
- **host** – Keyword followed by a specific IP address.

Default Setting

None

Command Mode

Standard ACL

Command Usage

- New rules are appended to the end of the list.
- Address bitmasks are similar to a subnet mask, containing four integers from 0 to 255, each separated by a period. The binary mask uses 1 bits to indicate “match” and 0 bits to indicate “ignore.” The bitmask is bitwise ANDed with the specified source IP address, and then compared with the address for each IP packet entering the port(s) to which this ACL has been assigned.

Example

This example configures one permit rule for the specific address 10.1.1.21 and another rule for the address range 168.92.16.x – 168.92.31.x using a bitmask.

```
Console(config-std-acl)#permit host 10.1.1.21
Console(config-std-acl)#permit 168.92.16.0 255.255.240.0
Console(config-std-acl)#
```

Related Commands

access-list ip (4-89)

permit, deny (Extended ACL)

This command adds a rule to an Extended IP ACL. The rule sets a filter condition for packets with specific source or destination IP addresses, protocol types, source or destination protocol ports, or TCP control codes. Use the **no** form to remove a rule.

Syntax

```
[no] {permit | deny} [protocol-number | udp]
    {any | source address-bitmask | host source}
    {any | destination address-bitmask | host destination}
    [precedence precedence] [tos tos] [dscp dscp]
    [source-port sport [bitmask]] [destination-port dport [port-bitmask]]
```

```
[no] {permit | deny} tcp
    {any | source address-bitmask | host source}
    {any | destination address-bitmask | host destination}
    [precedence precedence] [tos tos] [dscp dscp]
    [source-port sport [bitmask]] [destination-port dport [port-bitmask]]
    [control-flag control-flags flag-bitmask]
```

- *protocol-number* – A specific protocol number. (Range: 0-255)
- *source* – Source IP address.
- *destination* – Destination IP address.
- *address-bitmask* – Decimal number representing the address bits to match.
- **host** – Keyword followed by a specific IP address.
- *precedence* – IP precedence level. (Range: 0-7)
- *tos* – Type of Service level. (Range: 0-15)
- *dscp* – DSCP priority level. (Range: 0-63)
- *sport* – Protocol²⁹ source port number. (Range: 0-65535)
- *dport* – Protocol²⁹ destination port number. (Range: 0-65535)
- *port-bitmask* – Decimal number representing the port bits to match. (Range: 0-65535)
- *control-flags* – Decimal number (representing a bit string) that specifies flag bits in byte 14 of the TCP header. (Range: 0-63)
- *flag-bitmask* – Decimal number representing the code bits to match.

Default Setting

None

Command Mode

Extended ACL

29. Includes TCP, UDP or other protocol types.

4 Command Line Interface

Command Usage

- All new rules are appended to the end of the list.
- Address bitmasks are similar to a subnet mask, containing four integers from 0 to 255, each separated by a period. The binary mask uses 1 bits to indicate “match” and 0 bits to indicate “ignore.” The bitmask is bitwise ANDed with the specified source IP address, and then compared with the address for each IP packet entering the port(s) to which this ACL has been assigned.
- You can specify both Precedence and ToS in the same rule. However, if DSCP is used, then neither Precedence nor ToS can be specified.
- The control-code bitmask is a decimal number (representing an equivalent bit mask) that is applied to the control code. Enter a decimal number, where the equivalent binary bit “1” means to match a bit and “0” means to ignore a bit. The following bits may be specified:
 - 1 (fin) – Finish
 - 2 (syn) – Synchronize
 - 4 (rst) – Reset
 - 8 (psh) – Push
 - 16 (ack) – Acknowledgement
 - 32 (urg) – Urgent pointer

For example, use the code value and mask below to catch packets with the following flags set:

- SYN flag valid, use “control-code 2 2”
- Both SYN and ACK valid, use “control-code 18 18”
- SYN valid and ACK invalid, use “control-code 2 18”

Example

This example accepts any incoming packets if the source address is within subnet 10.7.1.x. For example, if the rule is matched; i.e., the rule (10.7.1.0 & 255.255.255.0) equals the masked address (10.7.1.2 & 255.255.255.0), the packet passes through.

```
Console(config-ext-acl)#permit 10.7.1.1 255.255.255.0 any
Console(config-ext-acl)#
```

This allows TCP packets from class C addresses 192.168.1.0 to any destination address when set for destination TCP port 80 (i.e., HTTP).

```
Console(config-ext-acl)#permit 192.168.1.0 255.255.255.0 any
destination-port 80
Console(config-ext-acl)#
```

This permits all TCP packets from class C addresses 192.168.1.0 with the TCP control code set to “SYN.”

```
Console(config-ext-acl)#permit tcp 192.168.1.0 255.255.255.0 any
control-flag 2 2
Console(config-ext-acl)#
```


Related Commands

access-list ip (4-89)

show ip access-list

This command displays the rules for configured IP ACLs.

Syntax

show ip access-list {**standard** | **extended**} [*acl_name*]

- **standard** – Specifies a standard IP ACL.
- **extended** – Specifies an extended IP ACL.
- *acl_name* – Name of the ACL. (Maximum length: 16 characters)

Command Mode

Privileged Exec

Example

```
Console#show ip access-list standard
IP standard access-list david:
  permit host 10.1.1.21
  permit 168.92.0.0 0.0.15.255
Console#
```

Related Commands

permit, deny 4-90
ip access-group (4-98)

access-list ip mask-precedence

This command changes to the IP Mask mode used to configure access control masks. Use the **no** form to delete the mask table.

Syntax

[**no**] **access-list ip mask-precedence** {**in** | **out**}

- **in** – Ingress mask for ingress ACLs.
- **out** – Egress mask for egress ACLs.

Default Setting

Default system mask: Filter inbound packets according to specified IP ACLs.

Command Mode

Global Configuration

4 Command Line Interface

Command Usage

- A mask can only be used by all ingress ACLs or all egress ACLs.
- The precedence of the ACL rules applied to a packet is not determined by order of the rules, but instead by the order of the masks; i.e., the first mask that matches a rule will determine the rule that is applied to a packet.
- You must configure a mask for an ACL rule before you can bind it to a port or set the queue or frame priorities associated with the rule.

Example

```
Console(config)#access-list ip mask-precedence in
Console(config-ip-mask-acl) #
```

Related Commands

mask (IP ACL) (4-94)
ip access-group (4-98)

mask (IP ACL)

This command defines a mask for IP ACLs. This mask defines the fields to check in the IP header. Use the **no** form to remove a mask.

Syntax

```
[no] mask [protocol]
      {any | host | source-bitmask}
      {any | host | destination-bitmask}
      [precedence] [tos] [dscp]
      [source-port [port-bitmask]] [destination-port [port-bitmask]]
      [control-flag [flag-bitmask]]
```

- **protocol** – Check the protocol field.
- **any** – Any address will be matched.
- **host** – The address must be for a host device, not a subnetwork.
- *source-bitmask* – Source address of rule must match this bitmask.
- *destination-bitmask* – Destination address of rule must match this bitmask.
- **precedence** – Check the IP precedence field.
- **tos** – Check the TOS field.
- **dscp** – Check the DSCP field.
- **source-port** – Check the protocol source port field.
- **destination-port** – Check the protocol destination port field.
- *port-bitmask* – Protocol port of rule must match this bitmask. (Range: 0-65535)
- **control-flag** – Check the field for control flags.
- *flag-bitmask* – Control flags of rule must match this bitmask. (Range: 0-63)

Default Setting

None

Command Mode

IP Mask

Command Usage

- Packets crossing a port are checked against all the rules in the ACL until a match is found. The order in which these packets are checked is determined by the mask, and not the order in which the ACL rules were entered.
- First create the required ACLs and ingress or egress masks before mapping an ACL to an interface.
- If you enter **dscp**, you cannot enter **tos** or **precedence**. You can enter both **tos** and **precedence** without **dscp**.
- Masks that include an entry for a Layer 4 protocol source port or destination port can only be applied to packets with a header length of exactly five bytes.

Example

This example creates an IP ingress mask with two rules. Each rule is checked in order of precedence to look for a match in the ACL entries. The first entry matching a mask is applied to the inbound packet.

```
Console(config)#access-list ip mask-precedence in
Console(config-ip-mask-acl)#mask host any
Console(config-ip-mask-acl)#mask 255.255.255.0 any
Console(config-ip-mask-acl)#
```

This shows that the entries in the mask override the precedence in which the rules are entered into the ACL. In the following example, packets with the source address 10.1.1.1 are dropped because the “deny 10.1.1.1 255.255.255.255” rule has the higher precedence according to the “mask host any” entry.

```
Console(config)#access-list ip standard A2
Console(config-std-acl)#permit 10.1.1.0 255.255.255.0
Console(config-std-acl)#deny 10.1.1.1 255.255.255.255
Console(config-std-acl)#exit
Console(config)#access-list ip mask-precedence in
Console(config-ip-mask-acl)#mask host any
Console(config-ip-mask-acl)#mask 255.255.255.0 any
Console(config-ip-mask-acl)#
```

4 Command Line Interface

This shows how to create a standard ACL with an ingress mask to deny access to the IP host 171.69.198.102, and permit access to any others.

```
Console(config)#access-list ip standard A2
Console(config-std-acl)#permit any
Console(config-std-acl)#deny host 171.69.198.102
Console(config-std-acl)#end
Console#show access-list
IP standard access-list A2:
  deny host 171.69.198.102
  permit any
Console#configure
Console(config)#access-list ip mask-precedence in
Console(config-ip-mask-acl)#mask host any
Console(config-ip-mask-acl)#exit
Console(config)#interface ethernet 1/1
Console(config-if)#ip access-group A2 in
Console(config-if)#end
Console#show access-list
IP standard access-list A2:
  deny host 171.69.198.102
  permit any
Console#
```

This shows how to create an extended ACL with an egress mask to drop packets leaving network 171.69.198.0 when the Layer 4 source port is 23.

```
Console(config)#access-list ip extended A3
Console(config-ext-acl)#deny host 171.69.198.5 any
Console(config-ext-acl)#deny 171.69.198.0 255.255.255.0 any source-port 23
Console(config-ext-acl)#end
Console#show access-list
IP extended access-list A3:
  deny host 171.69.198.5 any
  deny 171.69.198.0 255.255.255.0 any source-port 23
Console#config
Console(config)#access-list ip mask-precedence out
Console(config-ip-mask-acl)#mask 255.255.255.0 any source-port
Console(config-ip-mask-acl)#exit
Console(config)#interface ethernet 1/15
Console(config-if)#ip access-group A3 out
Console(config-if)#end
Console#show access-list
IP extended access-list A3:
  deny 171.69.198.0 255.255.255.0 any source-port 23
  deny host 171.69.198.5 any
IP egress mask ACL:
  mask 255.255.255.0 any source-port
Console#
```

This is a more comprehensive example. It denies any TCP packets in which the SYN bit is ON, and permits all other packets. It then sets the ingress mask to check the deny rule first, and finally binds port 1 to this ACL. Note that once the ACL is bound to an interface (i.e., the ACL is active), the order in which the rules are displayed is determined by the associated mask.

```
Switch(config)#access-list ip extended 6
Switch(config-ext-acl)#permit any any
Switch(config-ext-acl)#deny tcp any any control-flag 2 2
Switch(config-ext-acl)#end
Console#show access-list
IP extended access-list A6:
  permit any any
  deny tcp any any control-flag 2 2
Console#configure
Switch(config)#access-list ip mask-precedence in
Switch(config-ip-mask-acl)#mask protocol any any control-flag 2
Switch(config-ip-mask-acl)#end
Console#sh access-list
IP extended access-list A6:
  permit any any
  deny tcp any any control-flag 2 2
IP ingress mask ACL:
  mask protocol any any control-flag 2
Console#configure
Console(config)#interface ethernet 1/1
Console(config-if)#ip access-group A6 in
Console(config-if)#end
Console#show access-list
IP extended access-list A6:
  deny tcp any any control-flag 2 2
  permit any any
IP ingress mask ACL:
  mask protocol any any control-flag 2
Console#
```

show access-list ip mask-precedence

This command shows the ingress or egress rule masks for IP ACLs.

Syntax

show access-list ip mask-precedence [in | out]

- **in** – Ingress mask precedence for ingress ACLs.
- **out** – Egress mask precedence for egress ACLs.

Command Mode

Privileged Exec

Example

```
Console#show access-list ip mask-precedence
IP ingress mask ACL:
  mask host any
  mask 255.255.255.0 any
Console#
```

4 Command Line Interface

Related Commands

mask (IP ACL) (4-94)

ip access-group

This command binds a port to an IP ACL. Use the **no** form to remove the port.

Syntax

[no] ip access-group *acl_name* {in | out}

- *acl_name* – Name of the ACL. (Maximum length: 16 characters)
- **in** – Indicates that this list applies to ingress packets.
- **out** – Indicates that this list applies to egress packets.

Default Setting

None

Command Mode

Interface Configuration (Ethernet)

Command Usage

- A port can only be bound to one ACL.
- If a port is already bound to an ACL and you bind it to a different ACL, the switch will replace the old binding with the new one.
- You must configure a mask for an ACL rule before you can bind it to a port.

Example

```
Console(config)#int eth 1/2
Console(config-if)#ip access-group standard david in
Console(config-if)#
```

Related Commands

show ip access-list (4-93)

show ip access-group

This command shows the ports assigned to IP ACLs.

Command Mode

Privileged Exec

Example

```
Console#show ip access-group
Interface ethernet 1/2
 IP standard access-list david
Console#
```

Related Commands

ip access-group (4-98)

map access-list ip

This command sets the output queue for packets matching an ACL rule. The specified CoS value is only used to map the matching packet to an output queue; it is not written to the packet itself. Use the **no** form to remove the CoS mapping.

Syntax

[no] map access-list ip *acl_name* cos *cos-value*

- *acl_name* – Name of the ACL. (Maximum length: 16 characters)
- *cos-value* – CoS value. (Range: 0-7)

Default Setting

None

Command Mode

Interface Configuration (Ethernet)

Command Usage

Command Usage

- You must configure an ACL mask before you can map CoS values to the rule.
- A packet matching a rule within the specified ACL is mapped to one of the output queues as shown in the following table. For information on mapping the CoS values to output queues, see **queue cos-map** on page 4-210.

Table 4-34 Mapping CoS Values to IP ACLs

Priority	0	1	2	3	4	5	6	7
Queue	1	2	0	3	4	5	6	7

Example

```
Console(config)#interface ethernet 1/2
Console(config-if)#map access-list ip bill cos 0
Console(config-if)#
```

Related Commands

queue cos-map (4-210)
show map access-list ip (4-100)

4 Command Line Interface

show map access-list ip

This command shows the CoS value mapped to an IP ACL for the current interface. (The CoS value determines the output queue for packets matching an ACL rule.)

Syntax

```
show map access-list ip [interface]
```

interface

- **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.

Command Mode

Privileged Exec

Example

```
Console#show map access-list ip
Access-list to COS of Eth 1/4
Access-list ALS1 cos 0
Console#
```

Related Commands

map access-list ip (4-99)

match access-list ip

This command changes the IEEE 802.1p priority, IP Precedence, or DSCP Priority of a frame matching the defined ACL rule. (This feature is commonly referred to as ACL packet marking.) Use the **no** form to remove the ACL marker.

Syntax

```
match access-list ip acl_name
    [set priority priority] {set tos tos_value | set dscp dscp_value}
no match access-list ip acl_name
```

- *acl_name* – Name of the ACL. (Maximum length: 16 characters)
- *priority* – Class of Service value in the IEEE 802.1p priority tag. (Range: 0-7; 7 is the highest priority)
- *tos_value* – IP Precedence value. (Range: 0-7)
- *dscp_value* – Differentiated Services Code Point value. (Range: 0-63)

Default Setting

None

Command Mode

Interface Configuration (Ethernet)

Command Usage

- You must configure an ACL mask before you can change frame priorities based on an ACL rule.
- Traffic priorities may be included in the IEEE 802.1p priority tag. This tag is also incorporated as part of the overall IEEE 802.1Q VLAN tag. To specify this priority, use the **set priority** keywords.
- The IP frame header also includes priority bits in the Type of Service (ToS) octet. The Type of Service octet may contain three bits for IP Precedence or six bits for Differentiated Services Code Point (DSCP) service. To specify the IP precedence priority, use the **set tos** keywords. To specify the DSCP priority, use the **set dscp** keywords. Note that the IP frame header can include either the IP Precedence or DSCP priority type.
- The precedence for priority mapping by this switch is IP Precedence or DSCP Priority, and then 802.1p priority.

Example

```
Console(config)#interface ethernet 1/12
Console(config-if)#match access-list ip bill set dscp 0
Console(config-if)#
```

Related Commands

show marking (4-101)

show marking

This command displays the current configuration for packet marking.

Command Mode

Privileged Exec

Example

```
Console#show marking
Interface ethernet 1/12
 match access-list IP bill set DSCP 0
 match access-list MAC a set priority 0
Console#
```

Related Commands

match access-list ip (4-100)

MAC ACLs

Table 4-35 MAC ACL Commands

Command	Function	Mode	Page
access-list mac	Creates a MAC ACL and enters configuration mode	GC	4-102
permit, deny	Filters packets matching a specified source and destination address, packet format, and Ethernet type	MAC-ACL	4-103
show mac access-list	Displays the rules for configured MAC ACLs	PE	4-104
access-list mac mask-precedence	Changes to the mode for configuring access control masks	GC	4-105
mask	Sets a precedence mask for the ACL rules	MAC-Mask	4-106
show access-list mac mask-precedence	Shows the ingress or egress rule masks for MAC ACLs	PE	4-108
mac access-group	Adds a port to a MAC ACL	IC	4-108
show mac access-group	Shows port assignments for MAC ACLs	PE	4-109
map access-list mac	Sets the CoS value and corresponding output queue for packets matching an ACL rule	IC	4-109
show map access-list mac	Shows CoS value mapped to an access list for an interface	PE	4-110
match access-list mac	Changes the 802.1p priority of a frame matching the defined rule (i.e., also called packet marking)	IC	4-111
show marking	Displays the current configuration for packet marking	PE	4-101

access-list mac

This command adds a MAC access list and enters MAC ACL configuration mode. Use the **no** form to remove the specified ACL.

Syntax

[no] access-list mac *acl_name*

acl_name – Name of the ACL. (Maximum length: 16 characters)

Default Setting

None

Command Mode

Global Configuration

Command Usage

- An egress ACL must contain all deny rules.
- When you create a new ACL or enter configuration mode for an existing ACL, use the **permit** or **deny** command to add new rules to the bottom of the list. To create an ACL, you must add at least one rule to the list.
- To remove a rule, use the **no permit** or **no deny** command followed by the exact text of a previously configured rule.
- An ACL can contain up to 32 rules.

Example

```
Console(config)#access-list mac jerry
Console(config-mac-acl)#
```

Related Commands

permit, deny 4-103
 mac access-group (4-108)
 show mac access-list (4-104)

permit, deny (MAC ACL)

This command adds a rule to a MAC ACL. The rule filters packets matching a specified MAC source or destination address (i.e., physical layer address), or Ethernet protocol type. Use the **no** form to remove a rule.

Syntax

```
[no] {permit | deny}
      {any | host source | source address-bitmask}
      {any | host destination | destination address-bitmask}
      [vid vid vid-bitmask] [ethertype protocol [protocol-bitmask]]
```

Note:- The default is for Ethernet II packets.

```
[no] {permit | deny} tagged-eth2
      {any | host source | source address-bitmask}
      {any | host destination | destination address-bitmask}
      [vid vid vid-bitmask] [ethertype protocol [protocol-bitmask]]
```

```
[no] {permit | deny} untagged-eth2
      {any | host source | source address-bitmask}
      {any | host destination | destination address-bitmask}
      [ethertype protocol [protocol-bitmask]]
```

```
[no] {permit | deny} tagged-802.3
      {any | host source | source address-bitmask}
      {any | host destination | destination address-bitmask}
      [vid vid vid-bitmask]
```

```
[no] {permit | deny} untagged-802.3
      {any | host source | source address-bitmask}
      {any | host destination | destination address-bitmask}
```

- **tagged-eth2** – Tagged Ethernet II packets.
- **untagged-eth2** – Untagged Ethernet II packets.
- **tagged-802.3** – Tagged Ethernet 802.3 packets.
- **untagged-802.3** – Untagged Ethernet 802.3 packets.
- **any** – Any MAC source or destination address.
- **host** – A specific MAC address.
- **source** – Source MAC address.

4 Command Line Interface

- *destination* – Destination MAC address range with bitmask.
- *address-bitmask*³⁰ – Bitmask for MAC address (in hexadecimal format).
- *vid* – VLAN ID. (Range: 1-4095)
- *vid-bitmask*³⁰ – VLAN bitmask. (Range: 1-4095)
- *protocol* – A specific Ethernet protocol number. (Range: 600-fff hex.)
- *protocol-bitmask*³⁰ – Protocol bitmask. (Range: 600-fff hex.)

Default Setting

None

Command Mode

MAC ACL

Command Usage

- New rules are added to the end of the list.
- The **ethertype** option can only be used to filter Ethernet II formatted packets.
- A detailed listing of Ethernet protocol types can be found in RFC 1060. A few of the more common types include the following:
 - 0800 - IP
 - 0806 - ARP
 - 8137 - IPX

Example

This rule permits packets from any source MAC address to the destination address 00-e0-29-94-34-de where the Ethernet type is 0800.

```
Console(config-mac-acl)#permit any host 00-e0-29-94-34-de ethertype 0800
Console(config-mac-acl)#
```

Related Commands

access-list mac (4-102)

show mac access-list

This command displays the rules for configured MAC ACLs.

Syntax

```
show mac access-list [acl_name]
```

acl_name – Name of the ACL. (Maximum length: 16 characters)

Command Mode

Privileged Exec

³⁰ For all bitmasks, "1" means care and "0" means ignore.

Example

```
Console#show mac access-list
MAC access-list jerry:
    permit any 00-e0-29-94-34-de ethertype 0800
Console#
```

Related Commands

permit, deny 4-103
mac access-group (4-108)

access-list mac mask-precedence

This command changes to MAC Mask mode used to configure access control masks. Use the **no** form to delete the mask table.

Syntax

[no] access-list ip mask-precedence {in | out}

- **in** – Ingress mask for ingress ACLs.
- **out** – Egress mask for egress ACLs.

Default Setting

Default system mask: Filter inbound packets according to specified MAC ACLs.

Command Mode

Global Configuration

Command Usage

- You must configure a mask for an ACL rule before you can bind it to a port or set the queue or frame priorities associated with the rule.
- A mask can only be used by all ingress ACLs or all egress ACLs.
- The precedence of the ACL rules applied to a packet is not determined by order of the rules, but instead by the order of the masks; i.e., the first mask that matches a rule will determine the rule that is applied to a packet.

Example

```
Console(config)#access-list mac mask-precedence in
Console(config-mac-mask-acl)#
```

Related Commands

mask (MAC ACL) (4-106)
mac access-group (4-108)

mask (MAC ACL)

This command defines a mask for MAC ACLs. This mask defines the fields to check in the packet header. Use the **no** form to remove a mask.

Syntax

[no] mask [pktformat]

{any | host | source-bitmask} {any | host | destination-bitmask}

[vid [vid-bitmask]] [ethertype [ethertype-bitmask]]

- **pktformat** – Check the packet format field. (If this keyword must be used in the mask, the packet format must be specified in ACL rule to match.)
- **any** – Any address will be matched.
- **host** – The address must be for a single node.
- **source-bitmask** – Source address of rule must match this bitmask.
- **destination-bitmask** – Destination address of rule must match this bitmask.
- **vid** – Check the VLAN ID field.
- **vid-bitmask** – VLAN ID of rule must match this bitmask.
- **ethertype** – Check the Ethernet type field.
- **ethertype-bitmask** – Ethernet type of rule must match this bitmask.

Default Setting

None

Command Mode

MAC Mask

Command Usage

- Up to seven masks can be assigned to an ingress or egress ACL.
- Packets crossing a port are checked against all the rules in the ACL until a match is found. The order in which these packets are checked is determined by the mask, and not the order in which the ACL rules were entered.
- First create the required ACLs and inbound or outbound masks before mapping an ACL to an interface.

Example

This example shows how to create an Ingress MAC ACL and bind it to a port. You can then see that the order of the rules have been changed by the mask.

```

Console(config)#access-list mac M4
Console(config-mac-acl)#permit any any
Console(config-mac-acl)#deny tagged-eth2 00-11-11-11-11-11
  ff-ff-ff-ff-ff-ff any vid 3
Console(config-mac-acl)#end
Console#show access-list
MAC access-list M4:
  permit any any
  deny tagged-eth2 host 00-11-11-11-11-11 any vid 3
Console(config)#access-list mac mask-precedence in
Console(config-mac-mask-acl)#mask pktformat ff-ff-ff-ff-ff-ff any vid
Console(config-mac-mask-acl)#exit
Console(config)#interface ethernet 1/12
Console(config-if)#mac access-group M4 in
Console(config-if)#end
Console#show access-list
MAC access-list M4:
  deny tagged-eth2 host 00-11-11-11-11-11 any vid 3
  permit any any
MAC ingress mask ACL:
  mask pktformat host any vid
Console#

```

This example creates an Egress MAC ACL.

```

Console(config)#access-list mac M5
Console(config-mac-acl)#deny tagged-802.3 host 00-11-11-11-11-11 any
Console(config-mac-acl)#deny tagged-eth2 00-11-11-11-11-11
  ff-ff-ff-ff-ff-ff any vid 3 ethertype 0806
Console(config-mac-acl)#end
Console#show access-list
MAC access-list M5:
  deny tagged-802.3 host 00-11-11-11-11-11 any
  deny tagged-eth2 host 00-11-11-11-11-11 any vid 3 ethertype 0806
Console(config)#access-list mac mask-precedence out
Console(config-mac-mask-acl)#mask pktformat ff-ff-ff-ff-ff-ff any vid
Console(config-mac-mask-acl)#exit
Console(config)#interface ethernet 1/5
Console(config-if)#mac access-group M5 out
Console(config-if)#end
Console#show access-list
MAC access-list M5:
  deny tagged-eth2 host 00-11-11-11-11-11 any vid 3 ethertype 0806
  deny tagged-802.3 host 00-11-11-11-11-11 any
MAC ingress mask ACL:
  mask pktformat host any vid ethertype
Console#

```

4 Command Line Interface

show access-list mac mask-precedence

This command shows the ingress or egress rule masks for MAC ACLs.

Syntax

show access-list mac mask-precedence [*in* | *out*]

- **in** – Ingress mask precedence for ingress ACLs.
- **out** – Egress mask precedence for egress ACLs.

Command Mode

Privileged Exec

Example

```
Console#show access-list mac mask-precedence
MAC egress mask ACL:
  mask pktformat host any vid ethertype
Console#
```

Related Commands

mask (MAC ACL) (4-106)

mac access-group

This command binds a port to a MAC ACL. Use the **no** form to remove the port.

Syntax

mac access-group *acl_name* {*in* | *out*}

- *acl_name* – Name of the ACL. (Maximum length: 16 characters)
- **in** – Indicates that this list applies to ingress packets.
- **out** – Indicates that this list applies to egress packets.

Default Setting

None

Command Mode

Interface Configuration (Ethernet)

Command Usage

- A port can only be bound to one ACL.
- If a port is already bound to an ACL and you bind it to a different ACL, the switch will replace the old binding with the new one.
- You must configure a mask for an ACL rule before you can bind it to a port.

Example

```
Console(config)#interface ethernet 1/2
Console(config-if)#mac access-group jerry in
Console(config-if)#
```


Related Commands

show mac access-list (4-104)

show mac access-group

This command shows the ports assigned to MAC ACLs.

Command Mode

Privileged Exec

Example

```
Console#show mac access-group
Interface ethernet 1/5
  MAC access-list M5 out
Console#
```

Related Commands

mac access-group (4-108)

map access-list mac

This command sets the output queue for packets matching an ACL rule. The specified CoS value is only used to map the matching packet to an output queue; it is not written to the packet itself. Use the **no** form to remove the CoS mapping.

Syntax

[no] map access-list mac *acl_name* cos *cos-value*

- *acl_name* – Name of the ACL. (Maximum length: 16 characters)
- *cos-value* – CoS value. (Range: 0-7)

Default Setting

None

Command Mode

Interface Configuration (Ethernet)

Command Usage

- You must configure an ACL mask before you can map CoS values to the rule.
- A packet matching a rule within the specified ACL is mapped to one of the output queues as shown below.

Table 4-36 Mapping CoS Values to MAC ACLs

Priority	0	1	2	3	4	5	6	7
Queue	1	2	0	3	4	5	6	7

4 Command Line Interface

Example

```
Console(config)#int eth 1/5
Console(config-if)#map access-list mac M5 cos 0
Console(config-if)#
```

Related Commands

queue cos-map (4-210)
show map access-list mac (4-110)

show map access-list mac

This command shows the CoS value mapped to a MAC ACL for the current interface. (The CoS value determines the output queue for packets matching an ACL rule.)

Syntax

show map access-list mac [*interface*]
interface

- **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.

Command Mode

Privileged Exec

Example

```
Console#show map access-list mac
Access-list to COS of Eth 1/5
Access-list M5 cos 0
Console#
```

Related Commands

map access-list mac (4-109)

match access-list mac

This command changes the IEEE 802.1p priority of a Layer 2 frame matching the defined ACL rule. (This feature is commonly referred to as ACL packet marking.) Use the **no** form to remove the ACL marker.

Syntax

```
match access-list mac acl_name set priority priority  
no match access-list mac acl_name
```

- *acl_name* – Name of the ACL. (Maximum length: 16 characters)
- *priority* – Class of Service value in the IEEE 802.1p priority tag. (Range: 0-7; 7 is the highest priority)

Default Setting

None

Command Mode

Interface Configuration (Ethernet)

Command Usage

You must configure an ACL mask before you can change frame priorities based on an ACL rule.

Example

```
Console(config)#interface ethernet 1/12  
Console(config-if)#match access-list mac a set priority 0  
Console(config-if)#
```

Related Commands

show marking (4-101)

ACL Information

Table 4-37 ACL Information Commands

Command	Function	Mode	Page
show access-list	Show all ACLs and associated rules	PE	4-112
show access-group	Shows the ACLs assigned to each port	PE	4-112

show access-list

This command shows all ACLs and associated rules, as well as all the user-defined masks.

Command Mode

Privileged Exec

Command Usage

Once the ACL is bound to an interface (i.e., the ACL is active), the order in which the rules are displayed is determined by the associated mask.

Example

```

Console#show access-list
IP standard access-list david:
  permit host 10.1.1.21
  permit 168.92.0.0 255.255.15.0
IP extended access-list bob:
  permit 10.7.1.1 255.255.255.0 any
  permit 192.168.1.0 255.255.255.0 any destination-port 80 80
  permit 192.168.1.0 255.255.255.0 any protocol tcp control-code 2 2
MAC access-list jerry:
  permit any host 00-30-29-94-34-de ethertype 800 800
IP extended access-list A6:
  deny tcp any any control-flag 2 2
  permit any any
IP ingress mask ACL:
  mask protocol any any control-flag 2
Console#

```

show access-group

This command shows the port assignments of ACLs.

Command Mode

Privileged Executive

Example

```

Console#show access-group
Interface ethernet 1/2
IP standard access-list david
MAC access-list jerry
Console#

```

SNMP Commands

Controls access to this switch from management stations using the Simple Network Management Protocol (SNMP), as well as the error types sent to trap managers.

SNMP Version 3 also provides security features that cover message integrity, authentication, and encryption; as well as controlling user access to specific areas of the MIB tree. To use SNMPv3, first set an SNMP engine ID (or accept the default), specify read and write access views for the MIB tree, configure SNMP user groups with the required security model (i.e., SNMP v1, v2c or v3) and security level (i.e., authentication and privacy), and then assign SNMP users to these groups, along with their specific authentication and privacy passwords.

Table 4-38 SNMP Commands

Command	Function	Mode	Page
snmp-server	Enables the SNMP agent	GC	4-113
show snmp	Displays the status of SNMP communications	NE, PE	4-114
snmp-server community	Sets up the community access string to permit access to SNMP commands	GC	4-115
snmp-server contact	Sets the system contact string	GC	4-115
snmp-server location	Sets the system location string	GC	4-116
snmp-server host	Specifies the recipient of an SNMP notification operation	GC	4-117
snmp-server enable traps	Enables the device to send SNMP traps (i.e., SNMP notifications)	GC	4-118
snmp-server engine-id	Sets the SNMP engine ID	GC	4-119
show snmp engine-id	Shows the SNMP engine ID	PE	4-119
snmp-server view	Adds an SNMP view	GC	4-120
show snmp view	Shows the SNMP views	PE	4-121
snmp-server group	Adds an SNMP group, mapping users to views	GC	4-121
show snmp group	Shows the SNMP groups	PE	4-123
snmp-server user	Adds a user to an SNMP group	GC	4-124
show snmp user	Shows the SNMP users	PE	4-125
snmp ip filter	Sets IP addresses of clients allowed management access to the switch via SNMP	GC	4-121

snmp-server

This command enables the SNMPv3 engine and services for all management clients (i.e., versions 1, 2c, 3). Use the no form to disable the server.

Syntax

[no] snmp-server

Default Setting

Enabled

4 Command Line Interface

Command Mode

Global Configuration

Example

```
Console(config)#snmp-server  
Console(config)#
```

show snmp

This command can be used to check the status of SNMP communications.

Default Setting

None

Command Mode

Normal Exec, Privileged Exec

Command Usage

This command provides information on the community access strings, counter information for SNMP input and output protocol data units, and whether or not SNMP logging has been enabled with the **snmp-server enable traps** command.

Example

```
Console#show snmp  
  
SNMP traps:  
Authentication: enable  
Link-up-down: enable  
  
SNMP communities:  
1. private, and the privilege is read-write  
2. public, and the privilege is read-only  
  
0 SNMP packets input  
0 Bad SNMP version errors  
0 Unknown community name  
0 Illegal operation for community name supplied  
0 Encoding errors  
0 Number of requested variables  
0 Number of altered variables  
0 Get-request PDUs  
0 Get-next PDUs  
0 Set-request PDUs  
  
0 SNMP packets output  
0 Too big errors  
0 No such name errors  
0 Bad values errors  
0 General errors  
0 Response PDUs  
0 Trap PDUs  
  
SNMP logging: disabled  
SNMP ip filter group:  
Console#
```

snmp-server community

This command defines the SNMP v1 and v2c community access string. Use the **no** form to remove the specified community string.

Syntax

snmp-server community *string* [**ro**|**rw**]

no snmp-server community *string*

- *string* - Community string that acts like a password and permits access to the SNMP protocol. (Maximum length: 32 characters, case sensitive; Maximum number of strings: 5)
- **ro** - Specifies read-only access. Authorized management stations are only able to retrieve MIB objects.
- **rw** - Specifies read/write access. Authorized management stations are able to both retrieve and modify MIB objects.

Default Setting

- public - Read-only access. Authorized management stations are only able to retrieve MIB objects.
- private - Read/write access. Authorized management stations are able to both retrieve and modify MIB objects.

Command Mode

Global Configuration

Example

```
Console(config)#snmp-server community alpha rw
Console(config)#
```

snmp-server contact

This command sets the system contact string. Use the **no** form to remove the system contact information.

Syntax

snmp-server contact *string*

no snmp-server contact

string - String that describes the system contact information.
(Maximum length: 255 characters)

Default Setting

None

Command Mode

Global Configuration

Example

```
Console(config)#snmp-server contact Paul
Console(config)#
```

4 Command Line Interface

Related Commands

snmp-server location (4-116)

snmp-server location

This command sets the system location string. Use the **no** form to remove the location string.

Syntax

snmp-server location *text*

no snmp-server location

text - String that describes the system location.

(Maximum length: 255 characters)

Default Setting

None

Command Mode

Global Configuration

Example

```
Console(config)#snmp-server location WC-19
Console(config)#
```

Related Commands

snmp-server contact (4-115)

snmp-server host

This command specifies the recipient of a Simple Network Management Protocol notification operation. Use the **no** form to remove the specified host.

Syntax

```
snmp-server host host-addr community-string  
[version {1 | 2c | 3 {auth | noauth | priv}}] [udp-port port]  
no snmp-server host host-addr
```

- *host-addr* - Internet address of the host (the targeted recipient). (Maximum host addresses: 5 trap destination IP address entries)
- *community-string* - Password-like community string sent with the notification operation to SNMP V1 and V2c hosts. Although you can set this string using the **snmp-server host** command by itself, we recommend that you define this string using the **snmp-server community** command prior to using the **snmp-server host** command. (Maximum length: 32 characters)
- **version** - Specifies whether to send notifications as SNMP Version 1, 2c or 3 traps. (Range: 1, 2c, 3; Default: 1)
- **auth** | **noauth** | **priv** - This group uses SNMPv3 with authentication, no authentication, or with authentication and privacy. See “Simple Network Management Protocol” on page 3-35 for further information about these authentication and encryption options.
- *port* - Host UDP port to use. (Range: 1-65535; Default: 162)

Default Setting

- Host Address: None
- SNMP Version: 1
- UDP Port: 162

Command Mode

Global Configuration

Command Usage

- If you do not enter an **snmp-server host** command, no notifications are sent. In order to configure the switch to send SNMP notifications, you must enter at least one **snmp-server host** command. In order to enable multiple hosts, you must issue a separate **snmp-server host** command for each host.
- The **snmp-server host** command is used in conjunction with the **snmp-server enable traps** command. Use the **snmp-server enable traps** command to enable the sending of traps and to specify which SNMP notifications are sent globally. For a host to receive notifications, at least one **snmp-server enable traps** command and the **snmp-server host** command for that host must be enabled.
- Some notification types cannot be controlled with the **snmp-server enable traps** command. For example, some notification types are always enabled.
- The switch can send SNMP Version 1, 2c or 3 notifications to a host IP address, depending on the SNMP version that the management station

4 Command Line Interface

supports. If the **snmp-server host** command does not specify the SNMP version, the default is to send SNMP version 1 notifications.

- If you specify an SNMP Version 3 host, then the community string is interpreted as an SNMP user name. If you use the V3 “auth” or “priv” options, the user name must first be defined with the **snmp-server user** command. Otherwise, the authentication password and/or privacy password will not exist, and the switch will not authorize SNMP access for the host. However, if you specify a V3 host with the “noauth” option, an SNMP user account will be generated, and the switch will authorize SNMP access for the host.

Example

```
Console(config)#snmp-server host 10.1.19.23 batman
Console(config)#
```

Related Commands

snmp-server enable traps (4-118)

snmp-server enable traps

This command enables this device to send Simple Network Management Protocol traps (SNMP notifications). Use the **no** form to disable SNMP notifications.

Syntax

[no] **snmp-server enable traps** [authentication | link-up-down]

- **authentication** - Keyword to issue authentication failure traps.
- **link-up-down** - Keyword to issue link-up or link-down traps.

Default Setting

Issue authentication and link-up-down traps.

Command Mode

Global Configuration

Command Usage

- If you do not enter an **snmp-server enable traps** command, no notifications controlled by this command are sent. In order to configure this device to send SNMP notifications, you must enter at least one **snmp-server enable traps** command. If you enter the command with no keywords, both authentication and link-up-down notifications are enabled. If you enter the command with a keyword, only the notification type related to that keyword is enabled.
- The **snmp-server enable traps** command is used in conjunction with the **snmp-server host** command. Use the **snmp-server host** command to specify which host or hosts receive SNMP notifications. In order to send notifications, you must configure at least one **snmp-server host** command.

Example

```
Console(config)#snmp-server enable traps link-up-down
Console(config)#
```

Related Commands

snmp-server host (4-117)

snmp-server engine-id

This command configures an identification string for the SNMPv3 engine. Use the **no** form to restore the default.

Syntax

```
snmp-server engine-id local engineid-string  
no snmp-server engine-id local
```

engineid-string - String identifying the engine ID.
(Range: 1-26 hexadecimal characters)

Default Setting

A unique engine ID is automatically generated by the switch based on its MAC address.

Command Mode

Global Configuration

Command Usage

- An SNMP engine is an independent SNMP agent that resides on this switch. This engine protects against message replay, delay, and redirection. The engine ID is also used in combination with user passwords to generate the security keys for authenticating and encrypting SNMPv3 packets.
- Trailing zeroes need not be entered to uniquely specify a engine ID. In other words, the value “1234” is equivalent to “1234” followed by 22 zeroes.
- A local engine ID is automatically generated that is unique to the switch. This is referred to as the default engine ID. If the local engine ID is deleted or changed, all SNMP users will be cleared. You will need to reconfigure all existing users (page 4-124).

Example

```
Console(config)#snmp-server engine-id local 12345  
Console(config)#
```

show snmp engine-id

This command shows the SNMP engine ID.

Command Mode

Privileged Exec

Example

This example shows the default engine ID.

```
Console#show snmp engine-id  
Local SNMP engineID: 8000002a8000000000e8666672  
Local SNMP engineBoots: 1  
Console#
```

Table 4-39 show snmp engine-id - display description

Field	Description
Local SNMP engineID	String identifying the engine ID.
Local SNMP engineBoots	The number of times that the engine has (re-)initialized since the snmp EngineID was last configured.

snmp-server view

This command adds an SNMP view which controls user access to the MIB. Use the **no** form to remove an SNMP view.

Syntax

snmp-server view *view-name oid-tree* {**included** | **excluded**}
no snmp-server view *view-name*

- *view-name* - Name of an SNMP view. (Range: 1-64 characters)
- *oid-tree* - Object identifier of a branch within the MIB tree. Wild cards can be used to mask a specific portion of the OID string. (Refer to the examples.)
- **included** - Defines an included view.
- **excluded** - Defines an excluded view.

Default Setting

defaultview (includes access to the entire MIB tree)

Command Mode

Global Configuration

Command Usage

- Views are used in the **snmp-server group** command to restrict user access to specified portions of the MIB tree.
- The predefined view “defaultview” includes access to the entire MIB tree.

Examples

This view includes MIB-2.

```
Console(config)#snmp-server view mib-2 1.3.6.1.2.1 included
Console(config)#
```

This view includes the MIB-2 interfaces table, ifDescr. The wild card is used to select all the index values in this table.

```
Console(config)#snmp-server view ifEntry.2 1.3.6.1.2.1.2.2.1.*.2 included
Console(config)#
```

This view includes the MIB-2 interfaces table, and the mask selects all index entries.

```
Console(config)#snmp-server view ifEntry.a 1.3.6.1.2.1.2.2.1.1.* included
Console(config)#
```

show snmp view

This command shows information on the SNMP views.

Command Mode

Privileged Exec

Example

```

Console#show snmp view
View Name: mib-2
Subtree OID: 1.2.2.3.6.2.1
View Type: included
Storage Type: permanent
Row Status: active

View Name: defaultview
Subtree OID: 1
View Type: included
Storage Type: permanent
Row Status: active

Console#

```

Table 4-40 show snmp view - display description

Field	Description
View Name	Name of an SNMP view.
Subtree OID	A branch in the MIB tree.
View Type	Indicates if the view is included or excluded.
Storage Type	The storage type for this entry.
Row Status	The row status of this entry.

snmp-server group

This command adds an SNMP group, mapping SNMP users to SNMP views. Use the **no** form to remove an SNMP group.

Syntax

```

snmp-server group groupname {v1 | v2c | v3 {auth | noauth | priv}}
  [read readview] [write writeview]
no snmp-server group groupname

```

- *groupname* - Name of an SNMP group. (Range: 1-32 characters)
- **v1** | **v2c** | **v3** - Use SNMP version 1, 2c or 3.
- **auth** | **noauth** | **priv** - This group uses SNMPv3 with authentication, no authentication, or with authentication and privacy. See “Simple Network Management Protocol” on page 3-35 for further information about these authentication and encryption options.
- *readview* - Defines the view for read access. (1-64 characters)
- *writeview* - Defines the view for write access. (1-64 characters)

4 Command Line Interface

Default Setting

Default groups: public³¹ (read only), private³² (read/write)

readview - Every object belonging to the Internet OID space (1.3.6.1).

writeview - Nothing is defined.

Command Mode

Global Configuration

Command Usage

- A group sets the access policy for the assigned users.
- When authentication is selected, the MD5 or SHA algorithm is used as specified in the **snmp-server user** command.
- When privacy is selected, the DES 56-bit algorithm is used for data encryption.

Example

```
Console(config)#snmp-server group r&d v3 auth write daily
Console(config)#
```

31. No view is defined.

32. Maps to the defaultview.

show snmp group

Four default groups are provided – SNMPv1 read-only access and read/write access, and SNMPv2c read-only access and read/write access.

Command Mode

Privileged Exec

Example

```
Console#show snmp group
Group Name: r&d
Security Model: v3
Read View: defaultview
Write View: daily
Notify View: none
Storage Type: permanent
Row Status: active

Group Name: public
Security Model: v1
Read View: defaultview
Write View: none
Notify View: none
Storage Type: volatile
Row Status: active

Group Name: public
Security Model: v2c
Read View: defaultview
Write View: none
Notify View: none
Storage Type: volatile
Row Status: active

Group Name: private
Security Model: v1
Read View: defaultview
Write View: defaultview
Notify View: none
Storage Type: volatile
Row Status: active

Group Name: private
Security Model: v2c
Read View: defaultview
Write View: defaultview
Notify View: none
Storage Type: volatile
Row Status: active

Console#
```

Table 4-41 show snmp group - display description

Field	Description
groupname	Name of an SNMP group.
security model	The SNMP version.
readview	The associated read view.
writeview	The associated write view.
notifyview	The associated notify view.
storage-type	The storage type for this entry.
Row Status	The row status of this entry.

snmp-server user

This command adds a user to an SNMP group, restricting the user to a specific SNMP Read and a Write View. Use the **no** form to remove a user from an SNMP group.

Syntax

```
snmp-server user username groupname {v1 | v2c | v3 [encrypted]
  [auth {md5 | sha} auth-password [priv des56 priv-password]}
no snmp-server user username
```

- *username* - Name of user connecting to the SNMP agent.
(Range: 1-32 characters)
- *groupname* - Name of an SNMP group to which the user is assigned.
(Range: 1-32 characters)
- **v1** | **v2c** | **v3** - Use SNMP version 1, 2c or 3.
- **encrypted** - Accepts the password as encrypted input.
- **auth** - Uses SNMPv3 with authentication.
- **md5** | **sha** - Uses MD5 or SHA authentication.
- *auth-password* - Authentication password. Enter as plain text if the **encrypted** option is not used. Otherwise, enter an encrypted password.
(A minimum of eight characters is required.)
- **priv des56** - Uses SNMPv3 with privacy with DES56 encryption.
- *priv-password* - Privacy password. Enter as plain text if the **encrypted** option is not used. Otherwise, enter an encrypted password.

Default Setting

None

Command Mode

Global Configuration

Command Usage

- The SNMP engine ID is used to compute the authentication/privacy digests from the password. You should therefore configure the engine ID with the **snmp-server engine-id** command before using this configuration command.

- SNMP passwords are localized using the authoritative SNMP engine ID.

Example

```
Console(config)#snmp-server user steve group r&d v3 auth md5 greenpeace
priv des56 einstien
Console(config)#
```

show snmp user

This command shows information on SNMP users.

Command Mode

Privileged Exec

Example

```
Console#show snmp user
EngineId: 01000000000000000000000000000000
User Name: steve
Authentication Protocol: md5
Privacy Protocol: des56
Storage Type: nonvolatile
Row Status: active
Console#
```

Table 4-42 show snmp user - display description

Field	Description
EngineId	String identifying the engine ID.
User Name	Name of user connecting to the SNMP agent.
Authentication Protocol	The authentication protocol used with SNMPv3.
Privacy Protocol	The privacy protocol used with SNMPv3.
Storage Type	The storage type for this entry.
Row Status	The row status of this entry.

snmp ip filter

This command sets the IP addresses of clients that are allowed management access to the switch via SNMP. Use the **no** form to remove an IP address.

Syntax

[no] snmp ip filter *ip_address subnet_mask*

- *ip_address* - An IP address indicating a client or group of clients that are allowed SNMP access to the switch.
- *subnet_mask* - An address bitmask of decimal numbers that represent the address bits to match.

Default Setting

None

4 Command Line Interface

Command Mode

Global Configuration

Command Usage

- You can create a list of up to 16 IP addresses or IP address groups that are allowed access to the switch via SNMP management software.
- Address bitmasks are similar to a subnet mask, containing four decimal integers from 0 to 255, each separated by a period. The binary mask uses “1” bits to indicate “match” and “0” bits to indicate “ignore.”
- If the IP is the address of a single management station, the bitmask should be set to 255.255.255.255. Otherwise, an IP address group is specified by the bitmask.
- The default setting is null, which allows all IP groups SNMP access to the switch. If one IP address is configured, IP filtering is enabled and only addresses in the specified IP group will have SNMP access.
- IP filtering does not affect management access to the switch using the web interface or Telnet.

Example

The following example enables SNMP IP filtering on the switch and allows SNMP management access to client IP 10.1.2.3, and client IP group 10.1.3.0 to 10.1.3.255.

```
Console(config)#snmp ip filter 10.1.2.3 255.255.255.255
Console(config)#snmp ip filter 10.1.3.0 255.255.255.0
Console(config)#
```

Related Commands

show snmp (4-114)

DHCP Commands

These commands are used to configure Dynamic Host Configuration Protocol (DHCP) client, relay, and server functions. You can configure any VLAN interface to be automatically assigned an IP address via DHCP. This switch can be configured to relay DHCP client configuration requests to a DHCP server on another network, or you can configure this switch to provide DHCP service directly to any client.

Table 4-43 DHCP Commands

Command Group	Function	Page
DHCP Client	Allows interfaces to dynamically acquire IP address information	4-127
DHCP Relay	Relays DHCP requests from local hosts to a remote DHCP server	4-128
DHCP Server	Configures DHCP service using address pools or static bindings	4-130

DHCP Client

Table 4-44 DHCP Client Commands

Command	Function	Mode	Page
ip dhcp client-identifier	Specifies the DHCP client identifier for this switch	IC	4-127
ip dhcp restart client	Submits a BOOTP or DHCP client request	PE	4-127

ip dhcp client-identifier

This command specifies the DHCP client identifier for the current interface. Use the **no** form to remove this identifier.

Syntax

```
ip dhcp client-identifier {text text | hex hex}
no ip dhcp client-identifier
```

- *text* - A text string. (Range: 1-15 characters)
- *hex* - The hexadecimal value.

Default Setting

None

Command Mode

Interface Configuration (VLAN)

Command Usage

This command is used to include a client identifier in all communications with the DHCP server. The identifier type depends on the requirements of your DHCP server.

Example

```
Console(config)#interface vlan 2
Console(config-if)#ip dhcp client-identifier hex 00-00-e8-66-65-72
Console(config-if)#
```

Related Commands

ip dhcp restart client (4-127)

ip dhcp restart client

This command submits a BOOTP or DHCP client request.

Default Setting

None

Command Mode

Privileged Exec

4 Command Line Interface

Command Usage

- This command issues a BOOTP or DHCP client request for any IP interface that has been set to BOOTP or DHCP mode via the **ip address** command.
- DHCP requires the server to reassign the client's last address if available.
- If the BOOTP or DHCP server has been moved to a different domain, the network portion of the address provided to the client will be based on this new domain.

Example

In the following example, the device is reassigned the same address.

```
Console(config)#interface vlan 1
Console(config-if)#ip address dhcp
Console(config-if)#exit
Console#ip dhcp restart client
Console#show ip interface

Vlan 1 is up, addressing mode is DHCP
  Interface address is 192.168.1.54, mask is 255.255.255.0, Primary
  MTU is 1500 bytes
  Proxy ARP is disabled
  Split horizon is enabled
Console#
```

Related Commands

ip address (4-236)

DHCP Relay

Table 4-45 DHCP Relay Commands

Command	Function	Mode	Page
ip dhcp restart relay	Enables DHCP relay agent	IC	4-128
ip dhcp relay server	Specifies DHCP server addresses for relay	IC	4-129

ip dhcp restart relay

This command enables DHCP relay for the specified VLAN. Use the **no** form to disable it.

Syntax

[no] ip dhcp relay

Default Setting

Disabled

Command Mode

Interface Configuration (VLAN)

Command Usage

This command is used to configure DHCP relay functions for host devices attached to the switch. If DHCP relay service is enabled, and this switch sees a DHCP request broadcast, it inserts its own IP address into the request so the DHCP server will know the subnet where the client is located. Then, the switch forwards the packet to the DHCP server on another network. When the server receives the DHCP request, it allocates a free IP address for the DHCP client from its defined scope for the DHCP client's subnet, and sends a DHCP response back to the DHCP relay agent (i.e., this switch). This switch then broadcasts the DHCP response received from the server to the client.

Example

In the following example, the device is reassigned the same address.

```
Console(config)#interface vlan 1
Console(config-if)#ip dhcp relay
Console(config-if)#end
Console#show ip interface

Vlan 1 is up, addressing mode is Dhcp
  Interface address is 10.1.0.254, mask is 255.255.255.0, Primary
  MTU is 1500 bytes
  Proxy ARP is disabled
  Split horizon is enabled
Console#
```

Related Commands

`ip dhcp relay server` (4-129)

ip dhcp relay server

This command specifies the addresses of DHCP servers to be used by the switch's DHCP relay agent. Use the **no** form to clear all addresses.

Syntax

ip dhcp relay server *address1* [*address2* [*address3* ...]]

no ip dhcp relay server

address - IP address of DHCP server. (Range: 1-3 addresses)

Default Setting

None

Command Mode

Interface Configuration (VLAN)

Usage Guidelines

- You must specify the IP address for at least one DHCP server. Otherwise, the switch's DHCP relay agent will not forward client requests to a DHCP server.
- To start DHCP relay service, enter the **ip dhcp restart relay** command.

4 Command Line Interface

Example

```
Console(config)#interface vlan 1
Console(config-if)#ip dhcp relay server 10.1.0.99
Console(config-if)#
```

Related Commands

ip dhcp restart relay (4-128)

DHCP Server

Table 4-46 DHCP Server Commands

Command	Function	Mode	Page
service dhcp	Enables the DHCP server feature on this switch	GC	4-130
ip dhcp excluded-address	Specifies IP addresses that a DHCP server should not assign to DHCP clients	GC	4-131
ip dhcp pool	Configures a DHCP address pool on a DHCP Server	GC	4-131
network	Configures the subnet number and mask for a DHCP address pool	DC	4-132
default-router	Specifies the default router list for a DHCP client	DC	4-133
domain-name	Specifies the domain name for a DHCP client	DC	4-133
dns-server	Specifies the Domain Name Server (DNS) servers available to a DHCP client	DC	4-134
next-server	Configures the next server in the boot process of a DHCP client	DC	4-134
bootfile	Specifies a default boot image for a DHCP client	DC	4-135
netbios-name-server	Configures NetBIOS Windows Internet Naming Service (WINS) name servers available to Microsoft DHCP clients	DC	4-135
netbios-node-type	Configures NetBIOS node type for Microsoft DHCP clients	DC	4-136
lease	Sets the duration an IP address is assigned to a DHCP client	DC	4-136
host*	Specifies the IP address and network mask to manually bind to a DHCP client	DC	4-137
client-identifier*	Specifies a client identifier for a DHCP client	DC	4-138
hardware-address*	Specifies the hardware address of a DHCP client	DC	4-139
clear ip dhcp binding	Deletes an automatic address binding from the DHCP server database	PE	4-139
show ip dhcp binding	Displays address bindings on the DHCP server	PE, NE	4-140

*These commands are used for manually binding an address to a client.

service dhcp

This command enables the DHCP server on this switch. Use the **no** form to disable the DHCP server.

Syntax

[no] service dhcp

Default Setting

Enabled

Command Mode

Global Configuration

Command Usage

If the DHCP server is running, you must restart it to implement any configuration changes.

Example

```
Console(config)#service dhcp
Console(config)#
```

ip dhcp excluded-address

This command specifies IP addresses that the DHCP server should not assign to DHCP clients. Use the **no** form to remove the excluded IP addresses.

Syntax

[no] **ip dhcp excluded-address** *low-address* [*high-address*]

- *low-address* - An excluded IP address, or the first IP address in an excluded address range.
- *high-address* - The last IP address in an excluded address range.

Default Setting

All IP pool addresses may be assigned.

Command Mode

Global Configuration

Example

```
Console(config)#ip dhcp excluded-address 10.1.0.19
Console(config)#
```

ip dhcp pool

This command configures a DHCP address pool and enter DHCP Pool Configuration mode. Use the **no** form to remove the address pool.

Syntax

[no] **ip dhcp pool** *name*

name - A string or integer. (Range: 1-8 characters)

Default Setting

DHCP address pools are not configured.

Command Mode

Global Configuration

4 Command Line Interface

Usage Guidelines

- After executing this command, the switch changes to DHCP Pool Configuration mode, identified by the (config-dhcp)# prompt.
- From this mode, first configure address pools for the network interfaces (using the **network** command). You can also manually bind an address to a specific client (with the **host** command) if required. You can configure up to 8 network address pools, and up to 32 manually bound host address pools (i.e., listing one host address per pool). However, note that any address specified in a **host** command must fall within the range of a configured network address pool.

Example

```
Console(config)#ip dhcp pool R&D
Console(config-dhcp)#
```

Related Commands

network (4-132)
host (4-137)

network

This command configures the subnet number and mask for a DHCP address pool. Use the **no** form to remove the subnet number and mask.

Syntax

network *network-number* [*mask*]
no network

- *network-number* - The IP address of the DHCP address pool.
- *mask* - The bit combination that identifies the network (or subnet) and the host portion of the DHCP address pool.

Command Mode

DHCP Pool Configuration

Usage Guidelines

- When a client request is received, the switch first checks for a network address pool matching the gateway where the request originated (i.e., if the request was forwarded by a relay server). If there is no gateway in the client request (i.e., the request was not forwarded by a relay server), the switch searches for a network pool matching the interface through which the client request was received. It then searches for a manually configured host address that falls within the matching network pool. If no manually configured host address is found, it assigns an address from the matching network address pool. However, if no matching address pool is found the request is ignored.
- This command is valid for DHCP network address pools only. If the mask is not specified, the class A, B, or C natural mask is used (see page 3-205). The DHCP server assumes that all host addresses are available. You can exclude

subsets of the address space by using the ip **dhcp excluded-address** command.

Example

```
Console(config-dhcp)#network 10.1.0.0 255.255.255.0
Console(config-dhcp)#
```

default-router

This command specifies default routers for a DHCP pool. Use the **no** form to remove the default routers.

Syntax

default-router *address1* [*address2*]
no default-router

- *address1* - Specifies the IP address of the primary router.
- *address2* - Specifies the IP address of an alternate router.

Default Setting

None

Command Mode

DHCP Pool Configuration

Usage Guidelines

The IP address of the router should be on the same subnet as the client. You can specify up to two routers. Routers are listed in order of preference (starting with *address1* as the most preferred router).

Example

```
Console(config-dhcp)#default-router 10.1.0.54 10.1.0.64
Console(config-dhcp)#
```

domain-name

This command specifies the domain name for a DHCP client. Use the **no** form to remove the domain name.

Syntax

domain-name *domain*
no domain-name

domain - Specifies the domain name of the client.
(Range: 1-32 characters)

Default Setting

None

Command Mode

DHCP Pool Configuration

4 Command Line Interface

Example

```
Console(config-dhcp)#domain-name sample.com
Console(config-dhcp)#
```

dns-server

This command specifies the Domain Name System (DNS) IP servers available to a DHCP client. Use the **no** form to remove the DNS server list.

Syntax

```
dns-server address1 [address2]
no dns-server
```

- *address1* - Specifies the IP address of the primary DNS server.
- *address2* - Specifies the IP address of the alternate DNS server.

Default Setting

None

Command Mode

DHCP Pool Configuration

Usage Guidelines

- If DNS IP servers are not configured for a DHCP client, the client cannot correlate host names to IP addresses.
- Servers are listed in order of preference (starting with *address1* as the most preferred server).

Example

```
Console(config-dhcp)#dns-server 10.1.1.253 192.168.3.19
Console(config-dhcp)#
```

next-server

This command configures the next server in the boot process of a DHCP client. Use the **no** form to remove the boot server list.

Syntax

```
[no] next-server address
```

address - Specifies the IP address of the next server in the boot process, which is typically a Trivial File Transfer Protocol (TFTP) server.

Default Setting

None

Command Mode

DHCP Pool Configuration

Example

```
Console(config-dhcp)#next-server 10.1.0.21
Console(config-dhcp)#
```

Related Commands

bootfile (4-135)

bootfile

This command specifies the name of the default boot image for a DHCP client. This file should be placed on the Trivial File Transfer Protocol (TFTP) server specified with the **next-server** command. Use the **no** form to delete the boot image name.

Syntax

bootfile *filename*
no bootfile

filename - Name of the file that is used as a default boot image.

Default Setting

None

Command Mode

DHCP Pool Configuration

Example

```
Console(config-dhcp)#bootfile wme.bat
Console(config-dhcp)#
```

Related Commands

next-server (4-134)

netbios-name-server

This command configures NetBIOS Windows Internet Naming Service (WINS) name servers that are available to Microsoft DHCP clients. Use the **no** form to remove the NetBIOS name server list.

Syntax

netbios-name-server *address1* [*address2*]
no netbios-name-server

- *address1* - Specifies IP address of primary NetBIOS WINS name server.
- *address2* - Specifies IP address of alternate NetBIOS WINS name server.

Default Setting

None

Command Mode

DHCP Pool Configuration

4 Command Line Interface

Usage Guidelines

Servers are listed in order of preference (starting with *address1* as the most preferred server).

Example

```
Console(config-dhcp)#netbios-name-server 10.1.0.33 10.1.0.34
Console(config-dhcp)#
```

Related Commands

netbios-node-type (4-136)

netbios-node-type

This command configures the NetBIOS node type for Microsoft DHCP clients. Use the **no** form to remove the NetBIOS node type.

Syntax

netbios-node-type *type*

no netbios-node-type

type - Specifies the NetBIOS node type:

- **broadcast**
- **hybrid** (recommended)
- **mixed**
- **peer-to-peer**

Default Setting

None

Command Mode

DHCP Pool Configuration

Example

```
Console(config-dhcp)#netbios-node-type hybrid
Console(config-dhcp)#
```

Related Commands

netbios-name-server (4-135)

lease

This command configures the duration that an IP address is assigned to a DHCP client. Use the **no** form to restore the default value.

Syntax

lease {*days* [*hours*][*minutes*] | **infinite**}

no lease

- *days* - Specifies the duration of the lease in numbers of days.
(Range: 0-364)

- *hours* - Specifies the number of hours in the lease. A *days* value must be supplied before you can configure *hours*. (Range: 0-23)
- *minutes* - Specifies the number of minutes in the lease. A *days* and *hours* value must be supplied before you can configure *minutes*. (Range: 0-59)
- **infinite** - Specifies that the lease time is unlimited. This option is normally used for addresses manually bound to a BOOTP client via the **host** command.

Default Setting

One day

Command Modes

DHCP Pool Configuration

Example

The following example leases an address to clients using this pool for 7 days.

```
Console(config-dhcp)#lease 7
Console(config-dhcp)#
```

host

Use this command to specify the IP address and network mask to manually bind to a DHCP client. Use the **no** form to remove the IP address for the client.

Syntax

host *address* [*mask*]

no host

- *address* - Specifies the IP address of a client.
- *mask* - Specifies the network mask of the client.

Default Setting

None

Command Mode

DHCP Pool Configuration

Usage Guidelines

- Host addresses must fall within the range specified for an existing network pool.
- When a client request is received, the switch first checks for a network address pool matching the gateway where the request originated (i.e., if the request was forwarded by a relay server). If there is no gateway in the client request (i.e., the request was not forwarded by a relay server), the switch searches for a network pool matching the interface through which the client request was received. It then searches for a manually configured host address that falls within the matching network pool.
- When searching for a manual binding, the switch compares the client identifier for DHCP clients, and then compares the hardware address for DHCP or BOOTP clients.

4 Command Line Interface

- If no manual binding has been specified for a host entry with the **client-identifier** or **hardware-address** commands, then the switch will assign an address from the matching network pool.
- If the mask is unspecified, DHCP examines its address pools. If no mask is found in the pool database, the Class A, B, or C natural mask is used (see page 3-205). This command is valid for manual bindings only.
- The **no host** command only clears the address from the DHCP server database. It does not cancel the IP address currently in use by the host.

Example

```
Console(config-dhcp)#host 10.1.0.21 255.255.255.0
Console(config-dhcp)#
```

Related Commands

client-identifier (4-138)
hardware-address (4-139)

client-identifier

This command specifies the client identifier of a DHCP client. Use the **no** form to remove the client identifier.

Syntax

client-identifier {*text text* | *hex hex*}
no client-identifier

- *text* - A text string. (Range: 1-15 characters)
- *hex* - The hexadecimal value.

Default Setting

None

Command Mode

DHCP Pool Configuration

Command Usage

- This command identifies a DHCP client to bind to an address specified in the **host** command. If both a client identifier and hardware address are configured for a host address, the client identifier takes precedence over the hardware address in the search procedure.
- BOOTP clients cannot transmit a client identifier. To bind an address to a BOOTP client, you must associate a hardware address with the host entry.

Example

```
Console(config-dhcp)#client-identifier text steve
Console(config-dhcp)#
```

Related Commands

host (4-137)

hardware-address

This command specifies the hardware address of a DHCP client. This command is valid for manual bindings only. Use the **no** form to remove the hardware address.

Syntax

hardware-address *hardware-address type*

no hardware-address

- *hardware-address* - Specifies the MAC address of the client device.
- *type* - Indicates the following protocol used on the client device:
 - ethernet
 - ieee802
 - fddi

Default Setting

If no type is specified, the default protocol is Ethernet.

Command Mode

DHCP Pool Configuration

Command Usage

This command identifies a DHCP or BOOTP client to bind to an address specified in the **host** command. BOOTP clients cannot transmit a client identifier. To bind an address to a BOOTP client, you must associate a hardware address with the host entry.

Example

```
Console(config-dhcp)#hardware-address 00-e0-29-94-34-28 ethernet
Console(config-dhcp)#
```

Related Commands

host (4-137)

clear ip dhcp binding

This command deletes an automatic address binding from the DHCP server database.

Syntax

clear ip dhcp binding {*address* | *}

- *address* - The address of the binding to clear.
- * - Clears all automatic bindings.

Default Setting

None

Command Mode

Privileged Exec

4 Command Line Interface

Usage Guidelines

- An *address* specifies the client's IP address. If an asterisk (*) is used as the address parameter, the DHCP server clears all automatic bindings.
- Use the **no host** command to delete a manual binding.
- This command is normally used after modifying the address pool, or after moving DHCP service to another device.

Example.

```
Console#clear ip dhcp binding *
Console#
```

Related Commands

show ip dhcp binding (4-140)

show ip dhcp binding

This command displays address bindings on the DHCP server.

Syntax

show ip dhcp binding [*address*]

address - Specifies the IP address of the DHCP client for which bindings will be displayed.

Default Setting

None

Command Mode

Normal Exec, Privileged Exec

Example

```
Console#show ip dhcp binding

      IP                MAC                Lease Time                Start
      (dd/hh/mm/ss)
-----
192.1.3.21 00-00-e8-98-73-21                86400 Dec 25 08:01:57 2002
Console#
```


DNS Commands

These commands are used to configure Domain Naming System (DNS) services. You can manually configure entries in the DNS domain name to IP address mapping table, configure default domain names, or specify one or more name servers to use for domain name to address translation.

Note that domain name services will not be enabled until at least one name server is specified with the **ip name-server** command and domain lookup is enabled with the **ip domain-lookup** command.

Table 4-47 DNS Commands

Command	Function	Mode	Page
ip host	Creates a static host name-to-address mapping	GC	4-141
clear host	Deletes entries from the host name-to-address table	PE	4-142
ip domain-name	Defines a default domain name for incomplete host names	GC	4-142
ip domain-list	Defines a list of default domain names for incomplete host names	GC	4-143
ip name-server	Specifies the address of one or more name servers to use for host name-to-address translation	GC	4-144
ip domain-lookup	Enables DNS-based host name-to-address translation	GC	4-145
show hosts	Displays the static host name-to-address mapping table	PE	4-146
show dns	Displays the configuration for DNS services	PE	4-147
show dns cache	Displays entries in the DNS cache	PE	4-147
clear dns cache	Clears all entries from the DNS cache	PE	4-148

ip host

This command creates a static entry in the DNS table that maps a host name to an IP address. Use the **no** form to remove an entry.

Syntax

[no] **ip host** *name* *address1* [*address2* ... *address8*]

- *name* - Name of the host. (Range: 1-64 characters)
- *address1* - Corresponding IP address.
- *address2* ... *address8* - Additional corresponding IP addresses.

Default Setting

No static entries

Command Mode

Global Configuration

4 Command Line Interface

Command Usage

Servers or other network devices may support one or more connections via multiple IP addresses. If more than one IP address is associated with a host name using this command, a DNS client can try each address in succession, until it establishes a connection with the target device.

Example

This example maps two address to a host name.

```
Console(config)#ip host rd5 192.168.1.55 10.1.0.55
Console(config)#end
Console#show hosts

Hostname
  rd5
Inet address
  10.1.0.55 192.168.1.55
Alias
Console#
```

clear host

This command deletes entries from the DNS table.

Syntax

clear host {*name* | *}

- *name* - Name of the host. (Range: 1-64 characters)
- * - Removes all entries.

Default Setting

None

Command Mode

Privileged Exec

Example

This example clears all static entries from the DNS table.

```
Console(config)#clear host *
Console(config)#
```

ip domain-name

This command defines the default domain name appended to incomplete host names (i.e., host names passed from a client that are not formatted with dotted notation). Use the **no** form to remove the current domain name.

Syntax

ip domain-name *name*
no ip domain-name

name - Name of the host. Do not include the initial dot that separates the host name from the domain name. (Range: 1-64 characters)

Default Setting

None

Command Mode

Global Configuration

Example

```
Console(config)#ip domain-name sample.com
Console(config)#end
Console#show dns
Domain Lookup Status:
    DNS disabled
Default Domain Name:
    .sample.com
Domain Name List:
Name Server List:
Console#
```

Related Commands

ip domain-list (4-143)
ip name-server (4-144)
ip domain-lookup (4-145)

ip domain-list

This command defines a list of domain names that can be appended to incomplete host names (i.e., host names passed from a client that are not formatted with dotted notation). Use the **no** form to remove a name from this list.

Syntax

[no] ip domain-list *name*

name - Name of the host. Do not include the initial dot that separates the host name from the domain name. (Range: 1-64 characters)

Default Setting

None

Command Mode

Global Configuration

Command Usage

- Domain names are added to the end of the list one at a time.
- When an incomplete host name is received by the DNS server on this switch, it will work through the domain list, appending each domain name in the list to the host name, and checking with the specified name servers for a match.
- If there is no domain list, the domain name specified with the **ip domain-name** command is used. If there is a domain list, the default domain name is not used.

4 Command Line Interface

Example

This example adds two domain names to the current list and then displays the list.

```
Console(config)#ip domain-list sample.com.jp
Console(config)#ip domain-list sample.com.uk
Console(config)#end
Console#show dns
Domain Lookup Status:
    DNS disabled
Default Domain Name:
    .sample.com
Domain Name List:
    .sample.com.jp
    .sample.com.uk
Name Server List:
Console#
```

Related Commands

ip domain-name (4-142)

ip name-server

This command specifies the address of one or more domain name servers to use for name-to-address resolution. Use the **no** form to remove a name server from this list.

Syntax

[no] ip name-server *server-address1* [*server-address2* ... *server-address6*]

- *server-address1* - IP address of domain-name server.
- *server-address2* ... *server-address6* - IP address of additional domain-name servers.

Default Setting

None

Command Mode

Global Configuration

Command Usage

The listed name servers are queried in the specified sequence until a response is received, or the end of the list is reached with no response.

Example

This example adds two domain-name servers to the list and then displays the list.

```
Console(config)#ip domain-server 192.168.1.55 10.1.0.55
Console(config)#end
Console#show dns
Domain Lookup Status:
  DNS disabled
Default Domain Name:
  .sample.com
Domain Name List:
  .sample.com.jp
  .sample.com.uk
Name Server List:
  192.168.1.55
  10.1.0.55
Console#
```

Related Commands

`ip domain-name` (4-142)
`ip domain-lookup` (4-145)

ip domain-lookup

This command enables DNS host name-to-address translation. Use the **no** form to disable DNS.

Syntax

[no] ip domain-lookup

Default Setting

Disabled

Command Mode

Global Configuration

Command Usage

- At least one name server must be specified before you can enable DNS.
- If all name servers are deleted, DNS will automatically be disabled.

4 Command Line Interface

Example

This example enables DNS and then displays the configuration.

```
Console(config)#ip domain-lookup
Console(config)#end
Console#show dns
Domain Lookup Status:
  DNS enabled
Default Domain Name:
  .sample.com
Domain Name List:
  .sample.com.jp
  .sample.com.uk
Name Server List:
  192.168.1.55
  10.1.0.55
Console#
```

Related Commands

- ip domain-name (4-142)
- ip name-server (4-144)

show hosts

This command displays the static host name-to-address mapping table.

Command Mode

Privileged Exec

Example

Note that a host name will be displayed as an alias if it is mapped to the same address(es) as a previously configured entry.

```
Console#show hosts
Hostname
  rd5
Inet address
  10.1.0.55 192.168.1.55
Alias
  1.rd6
Console#
```

show dns

This command displays the configuration of the DNS server.

Command Mode

Privileged Exec

Example

```

Console#show dns
Domain Lookup Status:
  DNS enabled
Default Domain Name:
  sample.com
Domain Name List:
  sample.com.jp
  sample.com.uk
Name Server List:
  192.168.1.55
  10.1.0.55
Console#

```

show dns cache

This command displays entries in the DNS cache.

Command Mode

Privileged Exec

Example

```

Console#show dns cache
NO      FLAG    TYPE    IP          TTL    DOMAIN
0       4       CNAME   10.2.44.96  893    www.planex.co.jp
1       4       CNAME   10.2.44.3   898    www2.planex.co.jp
2       4       CNAME   66.218.71.84 298    www.yahoo.akadns.net
3       4       CNAME   66.218.71.83 298    www.yahoo.akadns.net
4       4       CNAME   66.218.71.81 298    www.yahoo.akadns.net
5       4       CNAME   66.218.71.80 298    www.yahoo.akadns.net
6       4       CNAME   66.218.71.89 298    www.yahoo.akadns.net
7       4       CNAME   66.218.71.86 298    www.yahoo.akadns.net
8       4       ALIAS   POINTER TO:7 298    www.yahoo.com
Console#

```

Table 4-48 show dns cache - display description

Field	Description
NO	The entry number for each resource record.
FLAG	The flag is always "4" indicating a cache entry and therefore unreliable.
TYPE	This field includes CNAME which specifies the canonical or primary name for the owner, and ALIAS which specifies multiple domain names which are mapped to the same IP address as an existing entry.
IP	The IP address associated with this record.
TTL	The time to live reported by the name server.
DOMAIN	The domain name associated with this record.

4 Command Line Interface

clear dns cache

This command clears all entries in the DNS cache.

Command Mode

Privileged Exec

Example

```
Console#clear dns cache
Console#show dns cache
NO      FLAG      TYPE      IP              TTL      DOMAIN
Console#
```


Interface Commands

These commands are used to display or set communication parameters for an Ethernet port, aggregated link, or VLAN.

Table 4-49 Interface Commands

Command	Function	Mode	Page
interface	Configures an interface type and enters interface configuration mode	GC	4-149
description	Adds a description to an interface configuration	IC	4-150
speed-duplex	Configures the speed and duplex operation of a given interface when autonegotiation is disabled	IC	4-150
negotiation	Enables autonegotiation of a given interface	IC	4-151
capabilities	Advertises the capabilities of a given interface for use in autonegotiation	IC	4-152
flowcontrol	Enables flow control on a given interface	IC	4-153
media-type	Force port type selected for combination ports	IC	4-154
shutdown	Disables an interface	IC	4-154
switchport broadcast packet-rate	Configures the broadcast storm control threshold	IC	4-155
clear counters	Clears statistics on an interface	PE	4-156
show interfaces status	Displays status for the specified interface	NE, PE	4-156
show interfaces counters	Displays statistics for the specified interfaces	NE, PE	4-157
show interfaces switchport	Displays the administrative and operational status of an interface	NE, PE	4-158

interface

This command configures an interface type and enter interface configuration mode. Use the **no** form to remove a trunk.

Syntax

interface *interface*

no interface port-channel *channel-id*

interface

- **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.
- **port-channel** *channel-id* (Range: 1-6)
- **vlan** *vlan-id* (Range: 1-4094)

Default Setting

None

4 Command Line Interface

Command Mode

Global Configuration

Example

To specify port 4, enter the following command:

```
Console(config)#interface ethernet 1/4
Console(config-if)#
```

description

This command adds a description to an interface. Use the **no** form to remove the description.

Syntax

description *string*

no description

string - Comment or a description to help you remember what is attached to this interface. (Range: 1-64 characters)

Default Setting

None

Command Mode

Interface Configuration (Ethernet, Port Channel)

Example

The following example adds a description to port 4.

```
Console(config)#interface ethernet 1/4
Console(config-if)#description RD-SW#3
Console(config-if)#
```

speed-duplex

This command configures the speed and duplex mode of a given interface when autonegotiation is disabled. Use the **no** form to restore the default.

Syntax

speed-duplex {**1000full** | **100full** | **100half** | **10full** | **10half**}

no speed-duplex

- **1000full** - Forces 1000 Mbps full-duplex operation
- **100full** - Forces 100 Mbps full-duplex operation
- **100half** - Forces 100 Mbps half-duplex operation
- **10full** - Forces 10 Mbps full-duplex operation
- **10half** - Forces 10 Mbps half-duplex operation

Default Setting

- Auto-negotiation is enabled by default.
- When auto-negotiation is disabled, the default speed-duplex setting is 1000full for Gigabit Ethernet ports.

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- To force operation to the speed and duplex mode specified in a **speed-duplex** command, use the **no negotiation** command to disable auto-negotiation on the selected interface.
- When using the **negotiation** command to enable auto-negotiation, the optimal settings will be determined by the **capabilities** command. To set the speed/duplex mode under auto-negotiation, the required mode must be specified in the capabilities list for an interface.

Example

The following example configures port 5 to 100 Mbps, half-duplex operation.

```
Console(config)#interface ethernet 1/5
Console(config-if)#speed-duplex 100half
Console(config-if)#no negotiation
Console(config-if)#
```

Related Commands

negotiation (4-151)
capabilities (4-152)

negotiation

This command enables autonegotiation for a given interface. Use the **no** form to disable autonegotiation.

Syntax

[no] negotiation

Default Setting

Enabled

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- When auto-negotiation is enabled the switch will negotiate the best settings for a link based on the **capabilities** command. When auto-negotiation is disabled, you must manually specify the link attributes with the **speed-duplex** and **flowcontrol** commands.

4 Command Line Interface

- If autonegotiation is disabled, auto-MDI/MDI-X pin signal configuration will also be disabled for the RJ-45 ports.

Example

The following example configures port 11 to use autonegotiation.

```
Console(config)#interface ethernet 1/11
Console(config-if)#negotiation
Console(config-if)#
```

Related Commands

- capabilities (4-152)
- speed-duplex (4-150)

capabilities

This command advertises the port capabilities of a given interface during autonegotiation. Use the **no** form with parameters to remove an advertised capability, or the **no** form without parameters to restore the default values.

Syntax

[no] **capabilities** {**1000full** | **100full** | **100half** | **10full** | **10half** | **flowcontrol** | **symmetric**}

- **1000full** - Supports 1000 Mbps full-duplex operation
- **100full** - Supports 100 Mbps full-duplex operation
- **100half** - Supports 100 Mbps half-duplex operation
- **10full** - Supports 10 Mbps full-duplex operation
- **10half** - Supports 10 Mbps half-duplex operation
- **flowcontrol** - Supports flow control
- **symmetric** (Gigabit only) - When specified, the port transmits and receives pause frames; when not specified, the port will auto-negotiate to determine the sender and receiver for asymmetric pause frames. (*The current switch ASIC only supports symmetric pause frames.*)

Default Setting

- 100BASE-TX: 10half, 10full, 100half, 100full
- 1000BASE-T: 10half, 10full, 100half, 100full, 1000full
- 1000BASE-SX/LX/LH: 1000full

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

When auto-negotiation is enabled with the **negotiation** command, the switch will negotiate the best settings for a link based on the **capabilities** command. When auto-negotiation is disabled, you must manually specify the link attributes with the **speed-duplex** and **flowcontrol** commands.

Example

The following example configures Ethernet port 5 capabilities to 100half, 100full and flow control.

```
Console(config)#interface ethernet 1/5
Console(config-if)#capabilities 100half
Console(config-if)#capabilities 100full
Console(config-if)#capabilities flowcontrol
Console(config-if)#
```

Related Commands

negotiation (4-151)
speed-duplex (4-150)
flowcontrol (4-153)

flowcontrol

This command enables flow control. Use the **no** form to disable flow control.

Syntax

[no] flowcontrol

Default Setting

Enabled

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- Flow control can eliminate frame loss by “blocking” traffic from end stations or segments connected directly to the switch when its buffers fill. When enabled, back pressure is used for half-duplex operation and IEEE 802.3x for full-duplex operation.
- To force flow control on or off (with the **flowcontrol** or **no flowcontrol** command), use the **no negotiation** command to disable auto-negotiation on the selected interface.
- When using the **negotiation** command to enable auto-negotiation, the optimal settings will be determined by the **capabilities** command. To enable flow control under auto-negotiation, “flowcontrol” must be included in the capabilities list for any port
- Avoid using flow control on a port connected to a hub unless it is actually required to solve a problem. Otherwise back pressure jamming signals may degrade overall performance for the segment attached to the hub.

4 Command Line Interface

Example

The following example enables flow control on port 5.

```
Console(config)#interface ethernet 1/5
Console(config-if)#flowcontrol
Console(config-if)#no negotiation
Console(config-if)#
```

Related Commands

- negotiation (4-151)
- capabilities (flowcontrol, symmetric) (4-152)

media-type

This command forces the port type selected for combination ports 8 - 12. Use the **no** form to restore the default mode.

Syntax

media-type *mode*
no media-type

- *mode*
 - **copper-forced** - Always uses the built-in RJ-45 port.
 - **copper-preferred-auto** - Uses the built-in RJ-45 port if both combination types are functioning and the RJ-45 port has a valid link.
 - **sfp-forced** - Always uses the SFP port (even if module not installed).
 - **sfp-preferred-auto** - Uses SFP port if both combination types are functioning and the SFP port has a valid link.

Default Setting

sfp-preferred-auto

Command Mode

Interface Configuration (Ethernet)

Example

This forces the switch to use the built-in RJ-45 port for the combination port 8.

```
Console(config)#interface ethernet 1/8
Console(config-if)#media-type copper-forced
Console(config-if)#
```

shutdown

This command disables an interface. To restart a disabled interface, use the **no** form.

Syntax

[no] shutdown

Default Setting

All interfaces are enabled.

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

This command allows you to disable a port due to abnormal behavior (e.g., excessive collisions), and then reenables it after the problem has been resolved. You may also want to disable a port for security reasons.

Example

The following example disables port 5.

```
Console(config)#interface ethernet 1/5
Console(config-if)#shutdown
Console(config-if)#
```

switchport broadcast packet-rate

This command configures broadcast storm control. Use the **no** form to disable broadcast storm control.

Syntax

switchport broadcast packet-rate *rate*

no switchport broadcast

rate - Threshold level as a rate; i.e., packets per second.

(Range: 500 - 262143)

Default Setting

Enabled for all ports

Packet-rate limit: 500 packets per second

Command Mode

Interface Configuration (Ethernet)

Command Usage

- When broadcast traffic exceeds the specified threshold, packets above that threshold are dropped.
- Broadcast control does not effect IP multicast traffic.

Example

The following shows how to configure broadcast storm control at 600 packets per second:

```
Console(config)#interface ethernet 1/5
Console(config-if)#switchport broadcast packet-rate 600
Console(config-if)#
```

4 Command Line Interface

clear counters

This command clears statistics on an interface.

Syntax

clear counters *interface*

interface

- **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.
- **port-channel** *channel-id* (Range: 1-6)

Default Setting

None

Command Mode

Privileged Exec

Command Usage

Statistics are only initialized for a power reset. This command sets the base value for displayed statistics to zero for the current management session. However, if you log out and back into the management interface, the statistics displayed will show the absolute value accumulated since the last power reset.

Example

The following example clears statistics on port 5.

```
Console#clear counters ethernet 1/5
Console#
```

show interfaces status

This command displays the status for an interface.

Syntax

show interfaces status [*interface*]

interface

- **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.
- **port-channel** *channel-id* (Range: 1-6)
- **vlan** *vlan-id* (Range: 1-4094)

Default Setting

Shows the status for all interfaces.

Command Mode

Normal Exec, Privileged Exec

Command Usage

If no interface is specified, information on all interfaces is displayed. For a description of the items displayed by this command, see “Displaying Connection Status” on page 3-78.

Example

```
Console#show interfaces status ethernet 1/5
Information of Eth 1/5
Basic information:
  Port type: 1000T
  Mac address: 00-00-AB-CD-00-01
Configuration:
  Name:
  Port admin: Up
  Speed-duplex: Auto
  Capabilities: 10half, 10full, 100half, 100full, 1000full,
  Broadcast storm: Enabled
  Broadcast storm limit: 500 packets/second
  Flow control: Disabled
  Lcp: Disabled
  Port security: Disabled
  Max MAC count: 0
  Port security action: None
  Combo forced mode: None
Current status:
  Link status: Up
  Port operation status: Up
  Operation speed-duplex: 1000full
  Flow control type: None
Console#show interfaces status vlan 1
Information of VLAN 1
MAC address: 00-00-AB-CD-00-00
Console#
```

show interfaces counters

This command displays interface statistics.

Syntax

```
show interfaces counters [interface]
```

interface

- **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.
- **port-channel** *channel-id* (Range: 1-6)

Default Setting

Shows the counters for all interfaces.

4 Command Line Interface

Command Mode

Normal Exec, Privileged Exec

Command Usage

If no interface is specified, information on all interfaces is displayed. For a description of the items displayed by this command, see “Showing Port Statistics” on page 3-92.

Example

```
Console#show interfaces counters ethernet 1/7
Ethernet 1/7
Iftable stats:
  Octets input: 30658, Octets output: 196550
  Unicast input: 6, Unicast output: 5
  Discard input: 0, Discard output: 0
  Error input: 0, Error output: 0
  Unknown protos input: 0, QLen output: 0
Extended iftable stats:
  Multi-cast input: 0, Multi-cast output: 3064
  Broadcast input: 262, Broadcast output: 1
Ether-like stats:
  Alignment errors: 0, FCS errors: 0
  Single Collision frames: 0, Multiple collision frames: 0
  SQE Test errors: 0, Deferred transmissions: 0
  Late collisions: 0, Excessive collisions: 0
  Internal mac transmit errors: 0, Internal mac receive errors: 0
  Frame too longs: 0, Carrier sense errors: 0
  Symbol errors: 0
RMON stats:
  Drop events: 0, Octets: 227208, Packets: 3338
  Broadcast pkts: 263, Multi-cast pkts: 3064
  Undersize pkts: 0, Oversize pkts: 0
  Fragments: 0, Jabbers: 0
  CRC align errors: 0, Collisions: 0
  Packet size <= 64 octets: 3150, Packet size 65 to 127 octets: 139
  Packet size 128 to 255 octets: 49, Packet size 256 to 511 octets: 0
  Packet size 512 to 1023 octets: 0, Packet size 1024 to 1518 octets: 0
Console#
```

show interfaces switchport

This command displays the administrative and operational status of the specified interfaces.

Syntax

show interfaces switchport [*interface*]

interface

- **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.
- **port-channel** *channel-id* (Range: 1-6)

Default Setting

Shows all interfaces.

Command Mode

Normal Exec, Privileged Exec

Command Usage

If no interface is specified, information on all interfaces is displayed.

Example

This example shows the configuration setting for port 4.

```

Console#show interfaces switchport ethernet 1/4
Broadcast threshold: Enabled, 500 packets/second
LACP status: Disabled
Ingress rate limit: disable,1000M bits per second
Egress rate limit: disable,1000M bits per second
VLAN membership mode: Hybrid
Ingress rule: Disabled
Acceptable frame type: All frames
Native VLAN: 1
Priority for untagged traffic: 0
Gvrp status: Disabled
Allowed Vlan: 1(u),
Forbidden Vlan:
Console#
  
```

Table 4-50 show interfaces switchport - display description

Field	Description
Broadcast threshold	Shows if broadcast storm suppression is enabled or disabled; if enabled it also shows the threshold level (page 4-155).
LACP status	Shows if Link Aggregation Control Protocol has been enabled or disabled (page 4-164).
Ingress/Egress rate limit	Shows if rate limiting is enabled, and the current rate limit (page 4-162).
VLAN membership mode	Indicates membership mode as Trunk or Hybrid (page 4-192).
Ingress rule	Shows if ingress filtering is enabled or disabled (page 4-193).
Acceptable frame type	Shows if acceptable VLAN frames include all types or tagged frames only (page 4-192).
Native VLAN	Indicates the default Port VLAN ID (page 4-194).
Priority for untagged traffic	Indicates the default priority for untagged frames (page 4-207).
GVRP status	Shows if GARP VLAN Registration Protocol is enabled or disabled (page 4-204).
Allowed VLAN	Shows the VLANs this interface has joined, where "(u)" indicates untagged and "(t)" indicates tagged (page 4-195).
Forbidden VLAN	Shows the VLANs this interface can not dynamically join via GVRP (page 4-196).

Mirror Port Commands

This section describes how to mirror traffic from a source port to a target port.

Table 4-51 Mirror Port Commands

Command	Function	Mode	Page
port monitor	Configures a mirror session	IC	4-160
show port monitor	Shows the configuration for a mirror port	PE	4-161

port monitor

This command configures a mirror session. Use the **no** form to clear a mirror session.

Syntax

port monitor *interface* [**rx** | **tx** | **both**]

no port monitor *interface*

- *interface* - **ethernet** *unit/port* (source port)
 - *unit* - Switch (unit 1).
 - *port* - Port number.
- **rx** - Mirror received packets.
- **tx** - Mirror transmitted packets.
- **both** - Mirror both received and transmitted packets.

Default Setting

No mirror session is defined. When enabled, the default mirroring is for both received and transmitted packets.

Command Mode

Interface Configuration (Ethernet, destination port)

Command Usage

- You can mirror traffic from any source port to a destination port for real-time analysis. You can then attach a logic analyzer or RMON probe to the destination port and study the traffic crossing the source port in a completely unobtrusive manner.
- The destination port is set by specifying an Ethernet interface.
- The mirror port and monitor port speeds should match, otherwise traffic may be dropped from the monitor port.
- You can create multiple mirror sessions, but all sessions must share the same destination port. However, you should avoid sending too much traffic to the destination port from multiple source ports.

Example

The following example configures the switch to mirror all packets from port 6 to 11:

```
Console(config)#interface ethernet 1/11
Console(config-if)#port monitor ethernet 1/6 both
Console(config-if)#
```

show port monitor

This command displays mirror information.

Syntax

show port monitor [*interface*]

interface - **ethernet** *unit/port* (source port)

- *unit* - Switch (unit 1).
- *port* - Port number.

Default Setting

Shows all sessions.

Command Mode

Privileged Exec

Command Usage

This command displays the currently configured source port, destination port, and mirror mode (i.e., RX, TX, RX/TX).

Example

The following shows mirroring configured from port 6 to port 11:

```
Console(config)#interface ethernet 1/11
Console(config-if)#port monitor ethernet 1/6
Console(config-if)#end
Console#show port monitor
Port Mirroring
-----
Destination port(listen port):Eth1/1
Source port(monitored port) :Eth1/6
Mode                        :RX/TX
Console#
```

Rate Limit Commands

This function allows the network manager to control the maximum rate for traffic transmitted or received on an interface. Rate limiting is configured on interfaces at the edge of a network to limit traffic into or out of the network. Traffic that falls within the rate limit is transmitted, while packets that exceed the acceptable amount of traffic are dropped.

Rate limiting can be applied to individual ports or trunks. When an interface is configured with this feature, the traffic rate will be monitored by the hardware to verify conformity. Non-conforming traffic is dropped, conforming traffic is forwarded without any changes.

Table 4-52 Rate Limit Commands

Command	Function	Mode	Page
rate-limit	Configures the maximum input or output rate for a port	IC	4-162

rate-limit

This command defines the rate limit for a specific interface. Use this command without specifying a rate to restore the default rate. Use the **no** form to restore the default status of disabled.

Syntax

```
rate-limit {input | output} [rate]
no rate-limit {input | output}
```

- **input** – Input rate
- **output** – Output rate
- *rate* – Maximum value in Mbps. (Range: 1 to 1000 Mbps)

Default Setting

1000 Mbps

Command Mode

Interface Configuration (Ethernet, Port Channel)

Example

```
Console(config)#interface ethernet 1/1
Console(config-if)#rate-limit input 600
Console(config-if)#
```

Link Aggregation Commands

Ports can be statically grouped into an aggregate link (i.e., trunk) to increase the bandwidth of a network connection or to ensure fault recovery. Or you can use the Link Aggregation Control Protocol (LACP) to automatically negotiate a trunk link between this switch and another network device. For static trunks, the switches have to comply with the Cisco EtherChannel standard. For dynamic trunks, the switches have to comply with LACP. This switch supports up to six trunks. For example, a trunk consisting of two 1000 Mbps ports can support an aggregate bandwidth of 4 Gbps when operating at full duplex.

Table 4-53 Link Aggregation Commands

Command	Function	Mode	Page
<i>Manual Configuration Commands</i>			
interface port-channel	Configures a trunk and enters interface configuration mode for the trunk	GC	4-149
channel-group	Adds a port to a trunk	IC (Ethernet)	4-164
<i>Dynamic Configuration Command</i>			
lACP	Configures LACP for the current interface	IC (Ethernet)	4-164
<i>Trunk Status Display Command</i>			
show interfaces status port-channel	Shows trunk information	NE, PE	4-156

Guidelines for Creating Trunks

General Guidelines –

- Finish configuring port trunks before you connect the corresponding network cables between switches to avoid creating a loop.
- A trunk can have up to eight ports.
- The ports at both ends of a connection must be configured as trunk ports.
- All ports in a trunk must be configured in an identical manner, including communication mode (i.e., speed, duplex mode and flow control), VLAN assignments, and CoS settings.
- Any of the Gigabit ports on the front panel can be trunked together, including ports of different media types.
- All the ports in a trunk have to be treated as a whole when moved from/to, added or deleted from a VLAN via the specified port-channel.
- STP, VLAN, and IGMP settings can only be made for the entire trunk via the specified port-channel.

4 Command Line Interface

channel-group

This command adds a port to a trunk. Use the **no** form to remove a port from a trunk.

Syntax

```
channel-group channel-id  
no channel-group
```

channel-id - Trunk index (Range: 1-6)

Default Setting

The current port will be added to this trunk.

Command Mode

Interface Configuration (Ethernet)

Command Usage

- When configuring static trunks, the switches must comply with the Cisco EtherChannel standard.
- Use **no channel-group** to remove a port group from a trunk.
- Use **no interfaces port-channel** to remove a trunk from the switch.

Example

The following example creates trunk 1 and then adds port 11:

```
Console(config)#interface port-channel 1  
Console(config-if)#exit  
Console(config)#interface ethernet 1/11  
Console(config-if)#channel-group 1  
Console(config-if)#
```

lACP

This command enables 802.3ad Link Aggregation Control Protocol (LACP) for the current interface. Use the **no** form to disable it.

Syntax

```
[no] lACP
```

Default Setting

Disabled

Command Mode

Interface Configuration (Ethernet)

Command Usage

- The ports on both ends of an LACP trunk must be configured for full duplex, either by forced mode or auto-negotiation.
- A trunk formed with another switch using LACP will automatically be assigned the next available port-channel ID.

- If the target switch has also enabled LACP on the connected ports, the trunk will be activated automatically.
- If more than eight ports attached to the same target switch have LACP enabled, the additional ports will be placed in standby mode, and will only be enabled if one of the active links fails.

Example

The following shows LACP enabled on ports 10-12. Because LACP has also been enabled on the ports at the other end of the links, the **show interfaces status port-channel 1** command shows that Trunk1 has been established.

```
Console(config)#interface ethernet 1/10
Console(config-if)#lACP
Console(config-if)#exit
Console(config)#interface ethernet 1/11
Console(config-if)#lACP
Console(config-if)#exit
Console(config)#interface ethernet 1/12
Console(config-if)#lACP
Console(config-if)#end
Console#show interfaces status port-channel 1
Information of Trunk 1
Basic information:
  Port type: 1000T
  Mac address: 00-00-e8-00-00-0b
Configuration:
  Name:
  Port admin status: Up
  Speed-duplex: Auto
  Capabilities: 10half, 10full, 100half, 100full, 1000full,
  Flow control status: Disabled
  Port security: Disabled
  Max MAC count: 0
Current status:
  Created by: lACP
  Link status: Up
  Operation speed-duplex: 1000full
  Flow control type: None
  Member Ports: Eth1/10, Eth1/11, Eth1/12,
Console#
```

Address Table Commands

These commands are used to configure the address table for filtering specified addresses, displaying current entries, clearing the table, or setting the aging time.

Table 4-54 Address Table Commands

Command	Function	Mode	Page
mac-address-table static	Maps a static address to a port in a VLAN	GC	4-166
clear mac-address-table dynamic	Removes any learned entries from the forwarding database	PE	4-167
show mac-address-table	Displays entries in the bridge-forwarding database	PE	4-167
mac-address-table aging-time	Sets the aging time of the address table	GC	4-168
show mac-address-table aging-time	Shows the aging time for the address table	PE	4-169

mac-address-table static

This command maps a static address to a destination port in a VLAN. Use the **no** form to remove an address.

Syntax

```
mac-address-table static mac-address interface interface
vlan vlan-id [action]
no mac-address-table static mac-address vlan vlan-id
```

- *mac-address* - MAC address.
- *interface*
 - **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.
 - **port-channel** *channel-id* (Range: 1-6)
- *vlan-id* - VLAN ID (Range: 1-4094)
- *action* -
 - **delete-on-reset** - Assignment lasts until the switch is reset.
 - **permanent** - Assignment is permanent.

Default Setting

No static addresses are defined. The default mode is **permanent**.

Command Mode

Global Configuration

Command Usage

The static address for a host device can be assigned to a specific port within a specific VLAN. Use this command to add static addresses to the MAC Address Table. Static addresses have the following characteristics:

- Static addresses will not be removed from the address table when a given interface link is down.
- Static addresses are bound to the assigned interface and will not be moved. When a static address is seen on another interface, the address will be ignored and will not be written to the address table.
- A static address cannot be learned on another port until the address is removed with the **no** form of this command.

Example

```
Console(config)#mac-address-table static 00-e0-29-94-34-de interface
ethernet 1/1 vlan 1 delete-on-reset
```

clear mac-address-table dynamic

This command removes any learned entries from the forwarding database and clears the transmit and receive counts for any static or system configured entries.

Default Setting

None

Command Mode

Privileged Exec

Example

```
Console#clear mac-address-table dynamic
```

show mac-address-table

This command shows classes of entries in the bridge-forwarding database.

Syntax

```
show mac-address-table [address mac-address [mask]] [interface interface]
[vlan vlan-id] [sort {address | vlan | interface}]
```

- *mac-address* - MAC address.
- *mask* - Bits to match in the address.
- *interface*
 - **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.
 - **port-channel** *channel-id* (Range: 1-6)
- *vlan-id* - VLAN ID (Range: 1-4094)
- **sort** - Sort by address, vlan or interface.

4 Command Line Interface

Default Setting

None

Command Mode

Privileged Exec

Command Usage

- The MAC Address Table contains the MAC addresses associated with each interface. Note that the Type field may include the following types:
 - Learned - Dynamic address entries
 - Permanent - Static entry
 - Delete-on-reset - Static entry to be deleted when system is reset
- The mask should be hexadecimal numbers (representing an equivalent bit mask) in the form xx-xx-xx-xx-xx-xx that is applied to the specified MAC address. Enter hexadecimal numbers, where an equivalent binary bit “0” means to match a bit and “1” means to ignore a bit. For example, a mask of 00-00-00-00-00-00 means an exact match, and a mask of FF-FF-FF-FF-FF-FF means “any.”
- The maximum number of address entries is 8191.

Example

```
Console#show mac-address-table
Interface MAC Address      VLAN Type
-----
Eth 1/ 1 00-e0-29-94-34-de 1 Delete-on-reset
Console#
```

mac-address-table aging-time

This command sets the aging time for entries in the address table. Use the **no** form to restore the default aging time.

Syntax

mac-address-table aging-time *seconds*

no mac-address-table aging-time

seconds - Aging time. (Range: 10-1000000 seconds; 0 to disable aging)

Default Setting

300 seconds

Command Mode

Global Configuration

Command Usage

The aging time is used to age out dynamically learned forwarding information.

Example

```
Console(config)#mac-address-table aging-time 100
Console(config)#
```

show mac-address-table aging-time

This command shows the aging time for entries in the address table.

Default Setting

None

Command Mode

Privileged Exec

Example

```
Console#show mac-address-table aging-time
Aging time: 300 sec.
Console#
```

Spanning Tree Commands

This section includes commands that configure the Spanning Tree Algorithm (STA) globally for the switch, and commands that configure STA for the selected interface.

Table 4-55 Spanning Tree Commands

Command	Function	Mode	Page
spanning-tree	Enables the spanning tree protocol	GC	4-170
spanning-tree mode	Configures STP, RSTP or MSTP mode	GC	4-171
spanning-tree forward-time	Configures the spanning tree bridge forward time	GC	4-172
spanning-tree hello-time	Configures the spanning tree bridge hello time	GC	4-173
spanning-tree max-age	Configures the spanning tree bridge maximum age	GC	4-173
spanning-tree priority	Configures the spanning tree bridge priority	GC	4-174
spanning-tree path-cost method	Configures the path cost method for RSTP/MSTP	GC	4-174
spanning-tree transmission-limit	Configures the transmission limit for RSTP/MSTP	GC	4-175
spanning-tree mst-configuration	Changes to MSTP configuration mode	GC	4-175
mst vlan	Adds VLANs to a spanning tree instance	MST	4-176
mst priority	Configures the priority of a spanning tree instance	MST	4-177
name	Configures the name for the multiple spanning tree	MST	4-177
revision	Configures the revision number for the multiple spanning tree	MST	4-178
max-hops	Configures the maximum number of hops allowed in the region before a BPDU is discarded	MST	4-179

Table 4-55 Spanning Tree Commands (Continued)

Command	Function	Mode	Page
spanning-tree spanning-disabled	Disables spanning tree for an interface	IC	4-179
spanning-tree cost	Configures the spanning tree path cost of an interface	IC	4-180
spanning-tree port-priority	Configures the spanning tree priority of an interface	IC	4-180
spanning-tree edge-port	Enables fast forwarding for edge ports	IC	4-181
spanning-tree portfast	Sets an interface to fast forwarding	IC	4-182
spanning-tree link-type	Configures the link type for RSTP/MSTP	IC	4-183
spanning-tree mst cost	Configures the path cost of an instance in the MST	IC	4-183
spanning-tree mst port-priority	Configures the priority of an instance in the MST	IC	4-184
spanning-tree protocol-migration	Re-checks the appropriate BPDU format	PE	4-185
show spanning-tree	Shows spanning tree configuration for the common spanning tree (i.e., overall bridge), a selected interface, or an instance within the multiple spanning tree	PE	4-186
show spanning-tree mst configuration	Shows the multiple spanning tree configuration	PE	4-188

spanning-tree

This command enables the Spanning Tree Algorithm globally for the switch. Use the **no** form to disable it.

Syntax

[no] spanning-tree

Default Setting

Spanning tree is enabled.

Command Mode

Global Configuration

Command Usage

The Spanning Tree Algorithm (STA) can be used to detect and disable network loops, and to provide backup links between switches, bridges or routers. This allows the switch to interact with other bridging devices (that is, an STA-compliant switch, bridge or router) in your network to ensure that only one route exists between any two stations on the network, and provide backup links which automatically take over when a primary link goes down.

Example

This example shows how to enable the Spanning Tree Algorithm for the switch:

```
Console(config)#spanning-tree
Console(config)#
```

spanning-tree mode

This command selects the spanning tree mode for this switch. Use the **no** form to restore the default.

Syntax

```
spanning-tree mode {stp | rstp | mstp}
no spanning-tree mode
```

- **stp** - Spanning Tree Protocol (IEEE 802.1D)
- **rstp** - Rapid Spanning Tree Protocol (IEEE 802.1w)
- **mstp** - Multiple Spanning Tree (IEEE 802.1s)

Default Setting

rstp

Command Mode

Global Configuration

Command Usage

- Spanning Tree Protocol
Uses RSTP for the internal state machine, but sends only 802.1D BPDUs.
 - This creates one spanning tree instance for the entire network. If multiple VLANs are implemented on a network, the path between specific VLAN members may be inadvertently disabled to prevent network loops, thus isolating group members. When operating multiple VLANs, we recommend selecting the MSTP option.
- Rapid Spanning Tree Protocol
RSTP supports connections to either STP or RSTP nodes by monitoring the incoming protocol messages and dynamically adjusting the type of protocol messages the RSTP node transmits, as described below:
 - STP Mode – If the switch receives an 802.1D BPDU after a port's migration delay timer expires, the switch assumes it is connected to an 802.1D bridge and starts using only 802.1D BPDUs.
 - RSTP Mode – If RSTP is using 802.1D BPDUs on a port and receives an RSTP BPDU after the migration delay expires, RSTP restarts the migration delay timer and begins using RSTP BPDUs on that port.

4 Command Line Interface

- Multiple Spanning Tree Protocol
 - To allow multiple spanning trees to operate over the network, you must configure a related set of bridges with the same MSTP configuration, allowing them to participate in a specific set of spanning tree instances.
 - A spanning tree instance can exist only on bridges that have compatible VLAN instance assignments.
 - Be careful when switching between spanning tree modes. Changing modes stops all spanning-tree instances for the previous mode and restarts the system in the new mode, temporarily disrupting user traffic.

Example

The following example configures the switch to use Rapid Spanning Tree:

```
Console(config)#spanning-tree mode rstp
Console(config)#
```

spanning-tree forward-time

This command configures the spanning tree bridge forward time globally for this switch. Use the **no** form to restore the default.

Syntax

spanning-tree forward-time *seconds*
no spanning-tree forward-time

seconds - Time in seconds. (Range: 4 - 30 seconds)

The minimum value is the higher of 4 or $[(\text{max-age} / 2) + 1]$.

Default Setting

15 seconds

Command Mode

Global Configuration

Command Usage

This command sets the maximum time (in seconds) the root device will wait before changing states (i.e., discarding to learning to forwarding). This delay is required because every device must receive information about topology changes before it starts to forward frames. In addition, each port needs time to listen for conflicting information that would make it return to the discarding state; otherwise, temporary data loops might result.

Example

```
Console(config)#spanning-tree forward-time 20
Console(config)#
```


spanning-tree hello-time

This command configures the spanning tree bridge hello time globally for this switch. Use the **no** form to restore the default.

Syntax

```
spanning-tree hello-time time  
no spanning-tree hello-time
```

time - Time in seconds. (Range: 1-10 seconds).

The maximum value is the lower of 10 or $[(\text{max-age} / 2) - 1]$.

Default Setting

2 seconds

Command Mode

Global Configuration

Command Usage

This command sets the time interval (in seconds) at which the root device transmits a configuration message.

Example

```
Console(config)#spanning-tree hello-time 5  
Console(config)#
```

spanning-tree max-age

This command configures the spanning tree bridge maximum age globally for this switch. Use the **no** form to restore the default.

Syntax

```
spanning-tree max-age seconds  
no spanning-tree max-age
```

seconds - Time in seconds. (Range: 6-40 seconds)

The minimum value is the higher of 6 or $[2 \times (\text{hello-time} + 1)]$.

The maximum value is the lower of 40 or $[2 \times (\text{forward-time} - 1)]$.

Default Setting

20 seconds

Command Mode

Global Configuration

Command Usage

This command sets the maximum time (in seconds) a device can wait without receiving a configuration message before attempting to reconfigure. All device ports (except for designated ports) should receive configuration messages at regular intervals. Any port that ages out STA information (provided in the last

4 Command Line Interface

configuration message) becomes the designated port for the attached LAN. If it is a root port, a new root port is selected from among the device ports attached to the network.

Example

```
Console(config)#spanning-tree max-age 40
Console(config)#
```

spanning-tree priority

This command configures the spanning tree priority globally for this switch. Use the **no** form to restore the default.

Syntax

spanning-tree priority *priority*
no spanning-tree priority

priority - Priority of the bridge. (Range: 0 - 65535)
(Range – 0-61440, in steps of 4096; Options: 0, 4096, 8192, 12288, 16384, 20480, 24576, 28672, 32768, 36864, 40960, 45056, 49152, 53248, 57344, 61440)

Default Setting

32768

Command Mode

Global Configuration

Command Usage

Bridge priority is used in selecting the root device, root port, and designated port. The device with the highest priority (i.e., lower numeric value) becomes the STA root device. However, if all devices have the same priority, the device with the lowest MAC address will then become the root device.

Example

```
Console(config)#spanning-tree priority 40000
Console(config)#
```

spanning-tree pathcost method

This command configures the path cost method used for Rapid Spanning Tree and Multiple Spanning Tree. Use the **no** form to restore the default.

Syntax

spanning-tree pathcost method {**long** | **short**}
no spanning-tree pathcost method

- **long** - Specifies 32-bit based values that range from 1-200,000,000.
- **short** - Specifies 16-bit based values that range from 1-65535.

Default Setting

Long method

Command Mode

Global Configuration

Command Usage

The path cost method is used to determine the best path between devices. Therefore, lower values should be assigned to ports attached to faster media, and higher values assigned to ports with slower media. Note that path cost (page 4-180) takes precedence over port priority (page 4-180).

Example

```
Console(config)#spanning-tree pathcost method long
Console(config)#
```

spanning-tree transmission-limit

This command configures the minimum interval between the transmission of consecutive RSTP/MSTP BPDUs. Use the **no** form to restore the default.

Syntax

spanning-tree transmission-limit *count*
no spanning-tree transmission-limit

count - The transmission limit in seconds. (Range: 1-10)

Default Setting

3

Command Mode

Global Configuration

Command Usage

This command limits the maximum transmission rate for BPDUs.

Example

```
Console(config)#spanning-tree transmission-limit 4
Console(config)#
```

spanning-tree mst-configuration

This command changes to Multiple Spanning Tree (MST) configuration mode.

Default Setting

- No VLANs are mapped to any MST instance.
- The region name is set the switch's MAC address.

4 Command Line Interface

Command Mode

Global Configuration

Example

```
Console(config)#spanning-tree mst-configuration
Console(config-mstp)#
```

Related Commands

mst vlan (4-176)
mst priority (4-177)
name (4-177)
revision (4-178)
max-hops (4-179)

mst vlan

This command adds VLANs to a spanning tree instance. Use the **no** form to remove the specified VLANs. Using the **no** form without any VLAN parameters to remove all VLANs.

Syntax

[no] mst instance_id vlan vlan-range

- *instance_id* - Instance identifier of the spanning tree. (Range: 0-4094)
- *vlan-range* - Range of VLANs. (Range: 1-4094)

Default Setting

none

Command Mode

MST Configuration

Command Usage

- Use this command to group VLANs into spanning tree instances. MSTP generates a unique spanning tree for each instance. This provides multiple pathways across the network, thereby balancing the traffic load, preventing wide-scale disruption when a bridge node in a single instance fails, and allowing for faster convergence of a new topology for the failed instance.
- By default all VLANs are assigned to the Internal Spanning Tree (MSTI 0) that connects all bridges and LANs within the MST region. This switch supports up to 58 instances. You should try to group VLANs which cover the same general area of your network. However, remember that you must configure all bridges within the same MSTI Region (page 4-177) with the same set of instances, and the same instance (on each bridge) with the same set of VLANs. Also, note that RSTP treats each MSTI region as a single node, connecting all regions to the Common Spanning Tree.

Example

```
Console(config-mstp)#mst 1 vlan 2-5
Console(config-mstp)#
```

mst priority

This command configures the priority of a spanning tree instance. Use the **no** form to restore the default.

Syntax

mst *instance_id* **priority** *priority*
no mst *instance_id* **priority**

- *instance_id* - Instance identifier of the spanning tree. (Range: 0-4094)
- *priority* - Priority of the a spanning tree instance.
(Range: 0-61440 in steps of 4096; Options: 0, 4096, 8192, 12288, 16384, 20480, 24576, 28672, 32768, 36864, 40960, 45056, 49152, 53248, 57344, 61440)

Default Setting

32768

Command Mode

MST Configuration

Command Usage

- MST priority is used in selecting the root bridge and alternate bridge of the specified instance. The device with the highest priority (i.e., lowest numerical value) becomes the MSTI root device. However, if all devices have the same priority, the device with the lowest MAC address will then become the root device.
- You can set this switch to act as the MSTI root device by specifying a priority of 0, or as the MSTI alternate device by specifying a priority of 16384.

Example

```
Console(config-mstp)#mst 1 priority 4096
Console(config-mstp)#
```

name

This command configures the name for the multiple spanning tree region in which this switch is located. Use the **no** form to clear the name.

Syntax

name *name*

name - Name of the spanning tree.

4 Command Line Interface

Default Setting

Switch's MAC address

Command Mode

MST Configuration

Command Usage

The MST region name and revision number (page 4-178) are used to designate a unique MST region. A bridge (i.e., spanning-tree compliant device such as this switch) can only belong to one MST region. And all bridges in the same region must be configured with the same MST instances.

Example

```
Console(config-mstp)#name R&D
Console(config-mstp)#
```

Related Commands

revision (4-178)

revision

This command configures the revision number for this multiple spanning tree configuration of this switch. Use the **no** form to restore the default.

Syntax

revision *number*

number - Revision number of the spanning tree. (Range: 0-65535)

Default Setting

0

Command Mode

MST Configuration

Command Usage

The MST region name (page 4-177) and revision number are used to designate a unique MST region. A bridge (i.e., spanning-tree compliant device such as this switch) can only belong to one MST region. And all bridges in the same region must be configured with the same MST instances.

Example

```
Console(config-mstp)#revision 1
Console(config-mstp)#
```

Related Commands

name (4-177)

max-hops

This command configures the maximum number of hops in the region before a BPDU is discarded. Use the **no** form to restore the default.

Syntax

max-hops hop-number

hop-number - Maximum hop number for multiple spanning tree.
(Range: 1-40)

Default Setting

20

Command Mode

MST Configuration

Command Usage

An MSTI region is treated as a single node by the STP and RSTP protocols. Therefore, the message age for BPDUs inside an MSTI region is never changed. However, each spanning tree instance within a region, and the internal spanning tree (IST) that connects these instances use a hop count to specify the maximum number of bridges that will propagate a BPDU. Each bridge decrements the hop count by one before passing on the BPDU. When the hop count reaches zero, the message is dropped.

Example

```
Console(config-mstp)#max-hops 30
Console(config-mstp)#
```

spanning-tree spanning-disabled

This command disables the spanning tree algorithm for the specified interface. Use the **no** form to reenables the spanning tree algorithm for the specified interface.

Syntax

[no] spanning-tree spanning-disabled

Default Setting

Enabled

Command Mode

Interface Configuration (Ethernet, Port Channel)

Example

This example disables the spanning tree algorithm for port 5.

```
Console(config)#interface ethernet 1/5
Console(config-if)#spanning-tree spanning-disabled
Console(config-if)#
```

4 Command Line Interface

spanning-tree cost

This command configures the spanning tree path cost for the specified interface. Use the **no** form to restore the default.

Syntax

spanning-tree cost *cost*

no spanning-tree cost

cost - The path cost for the port. (Range: 1-200,000,000)

The recommended range is:

- Ethernet: 200,000-20,000,000
- Fast Ethernet: 20,000-2,000,000
- Gigabit Ethernet: 2,000-200,000

Default Setting

- Ethernet – half duplex: 2,000,000; full duplex: 1,000,000; trunk: 500,000
- Fast Ethernet – half duplex: 200,000; full duplex: 100,000; trunk: 50,000
- Gigabit Ethernet – full duplex: 10,000; trunk: 5,000

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- This command is used by the Spanning Tree Algorithm to determine the best path between devices. Therefore, lower values should be assigned to ports attached to faster media, and higher values assigned to ports with slower media.
- Path cost takes precedence over port priority.
- When the spanning-tree pathcost method (page 4-174) is set to short, the maximum value for path cost is 65,535.

Example

```
Console(config)#interface ethernet 1/5
Console(config-if)#spanning-tree cost 50
Console(config-if)#
```

spanning-tree port-priority

This command configures the priority for the specified interface. Use the **no** form to restore the default.

Syntax

spanning-tree port-priority *priority*

no spanning-tree port-priority

priority - The priority for a port. (Range: 0-240, in steps of 16)

Default Setting

128

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- This command defines the priority for the use of a port in the Spanning Tree Algorithm. If the path cost for all ports on a switch are the same, the port with the highest priority (that is, lowest value) will be configured as an active link in the spanning tree.
- Where more than one port is assigned the highest priority, the port with lowest numeric identifier will be enabled.

Example

```
Console(config)#interface ethernet 1/5
Console(config-if)#spanning-tree port-priority 0
```

Related Commands

spanning-tree cost (4-180)

spanning-tree edge-port

This command specifies an interface as an edge port. Use the **no** form to restore the default.

Syntax

[no] spanning-tree edge-port

Default Setting

Disabled

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- You can enable this option if an interface is attached to a LAN segment that is at the end of a bridged LAN or to an end node. Since end nodes cannot cause forwarding loops, they can pass directly through to the spanning tree forwarding state. Specifying Edge Ports provides quicker convergence for devices such as workstations or servers, retains the current forwarding database to reduce the amount of frame flooding required to rebuild address tables during reconfiguration events, does not cause the spanning tree to initiate reconfiguration when the interface changes state, and also overcomes other STA-related timeout problems. However, remember that Edge Port should only be enabled for ports connected to an end-node device.
- This command has the same effect as the **spanning-tree portfast**.

4 Command Line Interface

Example

```
Console(config)#interface ethernet ethernet 1/5
Console(config-if)#spanning-tree edge-port
Console(config-if)#
```

Related Commands

spanning-tree portfast (4-182)

spanning-tree portfast

This command sets an interface to fast forwarding. Use the **no** form to disable fast forwarding.

Syntax

[no] spanning-tree portfast

Default Setting

Disabled

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- This command is used to enable/disable the fast spanning-tree mode for the selected port. In this mode, ports skip the Discarding and Learning states, and proceed straight to Forwarding.
- Since end-nodes cannot cause forwarding loops, they can be passed through the spanning tree state changes more quickly than allowed by standard convergence time. Fast forwarding can achieve quicker convergence for end-node workstations and servers, and also overcome other STA related timeout problems. (Remember that fast forwarding should only be enabled for ports connected to a LAN segment that is at the end of a bridged LAN or for an end-node device.)
- This command is the same as **spanning-tree edge-port**, and is only included for backward compatibility with earlier products. Note that this command may be removed for future software versions.

Example

```
Console(config)#interface ethernet 1/5
Console(config-if)#bridge-group 1 portfast
Console(config-if)#
```

Related Commands

spanning-tree edge-port (4-181)

spanning-tree link-type

This command configures the link type for Rapid Spanning Tree and Multiple Spanning Tree. Use the **no** form to restore the default.

Syntax

```
spanning-tree link-type {auto | point-to-point | shared}  
no spanning-tree link-type
```

- **auto** - Automatically derived from the duplex mode setting.
- **point-to-point** - Point-to-point link.
- **shared** - Shared medium.

Default Setting

auto

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- Specify a point-to-point link if the interface can only be connected to exactly one other bridge, or a shared link if it can be connected to two or more bridges.
- When automatic detection is selected, the switch derives the link type from the duplex mode. A full-duplex interface is considered a point-to-point link, while a half-duplex interface is assumed to be on a shared link.
- RSTP only works on point-to-point links between two bridges. If you designate a port as a shared link, RSTP is forbidden. Since MSTP is an extension of RSTP, this same restriction applies.

Example

```
Console(config)#interface ethernet ethernet 1/5  
Console(config-if)#spanning-tree link-type point-to-point
```

spanning-tree mst cost

This command configures the path cost on a spanning instance in the Multiple Spanning Tree. Use the **no** form to restore the default.

Syntax

```
spanning-tree mst instance_id cost cost  
no spanning-tree mst instance_id cost
```

- *instance_id* - Instance identifier of the spanning tree.
(Range: 0-4094, no leading zeroes)
- *cost* - Path cost for an interface. (Range: 1-200,000,000)
The recommended range is -
 - Ethernet: 200,000-20,000,000
 - Fast Ethernet: 20,000-2,000,000
 - Gigabit Ethernet: 2,000-200,000

4 Command Line Interface

Default Setting

- Ethernet – half duplex: 2,000,000; full duplex: 1,000,000; trunk: 500,000
- Fast Ethernet – half duplex: 200,000; full duplex: 100,000; trunk: 50,000
- Gigabit Ethernet – full duplex: 10,000; trunk: 5,000

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- Each spanning-tree instance is associated with a unique set of VLAN IDs.
- This command is used by the multiple spanning-tree algorithm to determine the best path between devices. Therefore, lower values should be assigned to interfaces attached to faster media, and higher values assigned to interfaces with slower media.
- Path cost takes precedence over interface priority.

Example

```
Console(config)#interface ethernet ethernet 1/5
Console(config-if)#spanning-tree mst 1 cost 50
Console(config-if)#
```

Related Commands

spanning-tree mst port-priority (4-184)

spanning-tree mst port-priority

This command configures the interface priority on a spanning instance in the Multiple Spanning Tree. Use the **no** form to restore the default.

Syntax

```
spanning-tree mst instance_id port-priority priority  
no spanning-tree mst instance_id port-priority
```

- *instance_id* - Instance identifier of the spanning tree.
(Range: 0-4094, no leading zeroes)
- *priority* - Priority for an interface. (Range: 0-240 in steps of 16)

Default Setting

128

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- This command defines the priority for the use of an interface in the multiple spanning-tree. If the path cost for all interfaces on a switch are the same, the

interface with the highest priority (that is, lowest value) will be configured as an active link in the spanning tree.

- Where more than one interface is assigned the highest priority, the interface with lowest numeric identifier will be enabled.

Example

```
Console(config)#interface ethernet ethernet 1/5
Console(config-if)#spanning-tree mst 1 port-priority 0
Console(config-if)#
```

Related Commands

spanning-tree mst cost (4-183)

spanning-tree protocol-migration

This command re-checks the appropriate BPDU format to send on the selected interface.

Syntax

spanning-tree protocol-migration *interface*

interface

- **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.
- **port-channel** *channel-id* (Range: 1-6)

Command Mode

Privileged Exec

Command Usage

If at any time the switch detects STP BPDUs, including Configuration or Topology Change Notification BPDUs, it will automatically set the selected interface to forced STP-compatible mode. However, you can also use the **spanning-tree protocol-migration** command at any time to manually re-check the appropriate BPDU format to send on the selected interfaces (i.e., RSTP or STP-compatible).

Example

```
Console(config)#interface ethernet ethernet 1/5
Console(config-if)#spanning-tree protocol-migration
Console(config-if)#
```

show spanning-tree

This command shows the configuration for the common spanning tree (CST) or for an instance within the multiple spanning tree (MST).

Syntax

show spanning-tree [*interface* | **mst** *instance_id*]

- *interface*
 - **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.
 - **port-channel** *channel-id* (Range: 1-6)
- *instance_id* - Instance identifier of the multiple spanning tree. (Range: 0-4094, no leading zeroes)

Default Setting

None

Command Mode

Privileged Exec

Command Usage

- Use the **show spanning-tree** command with no parameters to display the spanning tree configuration for the switch for the Common Spanning Tree (CST) and for every interface in the tree.
- Use the **show spanning-tree interface** command to display the spanning tree configuration for an interface within the Common Spanning Tree (CST).
- Use the **show spanning-tree mst instance_id** command to display the spanning tree configuration for an instance within the Multiple Spanning Tree (MST).
- For a description of the items displayed under “Spanning-tree information,” see “Configuring Global Settings” on page 3-103. For a description of the items displayed for specific interfaces, see “Displaying Interface Settings” on page 3-107.

Example

```
Console#show spanning-tree
Spanning-tree information
-----
Spanning tree mode           :MSTP
Spanning tree enable/disable :enable
Instance                     :0
Vlans configuration         :1-4094
Priority                     :32768
Bridge Hello Time (sec.)    :2
Bridge Max Age (sec.)       :20
Bridge Forward Delay (sec.) :15
Root Hello Time (sec.)      :2
Root Max Age (sec.)         :20
Root Forward Delay (sec.)   :15
Max hops                    :20
Remaining hops              :20
Designated Root             :32768.0.0000ABCD0000
Current root port           :1
Current root cost           :200000
Number of topology changes  :1
Last topology changes time (sec.):22
Transmission limit         :3
Path Cost Method            :long
-----
Eth 1/ 1 information
-----
Admin status      : enable
Role              : root
State             : forwarding
External path cost : 100000
Internal path cost : 100000
Priority          : 128
Designated cost   : 200000
Designated port   : 128.24
Designated root   : 32768.0.0000ABCD0000
Designated bridge : 32768.0.0030F1552000
Fast forwarding   : disable
Forward transitions : 1
Admin edge port   : enable
Oper edge port    : disable
Admin Link type   : auto
Oper Link type    : point-to-point
Spanning Tree Status : enable
:
:
Console#
```

show spanning-tree mst configuration

This command shows the configuration of the multiple spanning tree.

Command Mode

Privileged Exec

Example

```
Console#show spanning-tree mst configuration
Mstp Configuration Information
-----
Configuration name:00 30 f1 8f d5 50
Revision level:0

Instance VLANs
-----
      1      2
Console#
```

VLAN Commands

A VLAN is a group of ports that can be located anywhere in the network, but communicate as though they belong to the same physical segment. This section describes commands used to create VLAN groups, add port members, specify how VLAN tagging is used, and enable automatic VLAN registration for the selected interface.

Table 4-56 VLAN Commands

Command Groups	Function	Page
Editing VLAN Groups	Sets up VLAN groups, including name, VID and state	4-189
Configuring VLAN Interfaces	Configures VLAN interface parameters, including ingress and egress tagging mode, ingress filtering, PVID, and GVRP	4-191
Displaying VLAN Information	Displays VLAN groups, status, port members, and MAC addresses	4-197
Configuring Private VLANs	Configures private VLANs, including uplink and downlink ports	4-198
Configuring Protocol VLANs	Configures protocol-based VLANs based on frame type and protocol	4-199

Editing VLAN Groups

Table 4-57 Commands for Editing VLAN Groups

Command	Function	Mode	Page
vlan database	Enters VLAN database mode to add, change, and delete VLANs	GC	4-189
vlan	Configures a VLAN, including VID, name and state	VC	4-190

vlan database

This command enters VLAN database mode. All commands in this mode will take effect immediately.

Default Setting

None

Command Mode

Global Configuration

Command Usage

- Use the VLAN database command mode to add, change, and delete VLANs. After finishing configuration changes, you can display the VLAN settings by entering the **show vlan** command.
- Use the **interface vlan** command mode to define the port membership mode and add or remove ports from a VLAN. The results of these commands are written to the running-configuration file, and you can display this file by entering the **show running-config** command.

Example

```
Console(config)#vlan database
Console(config-vlan)#
```

Related Commands

show vlan (4-197)

4 Command Line Interface

vlan

This command configures a VLAN. Use the **no** form to restore the default settings or delete a VLAN.

Syntax

```
vlan vlan-id [name vlan-name] media ethernet [state {active | suspend}]  
no vlan vlan-id [name | state]
```

- *vlan-id* - ID of configured VLAN. (Range: 1-4094, no leading zeroes)
- **name** - Keyword to be followed by the VLAN name.
 - *vlan-name* - ASCII string from 1 to 32 characters.
- **media ethernet** - Ethernet media type.
- **state** - Keyword to be followed by the VLAN state.
 - **active** - VLAN is operational.
 - **suspend** - VLAN is suspended. Suspended VLANs do not pass packets.

Default Setting

By default only VLAN 1 exists and is active.

Command Mode

VLAN Database Configuration

Command Usage

- **no vlan** *vlan-id* deletes the VLAN.
- **no vlan** *vlan-id* **name** removes the VLAN name.
- **no vlan** *vlan-id* **state** returns the VLAN to the default state (i.e., active).
- You can configure up to 255 VLANs on the switch.

Example

The following example adds a VLAN, using VLAN ID 105 and name RD5. The VLAN is activated by default.

```
Console(config)#vlan database  
Console(config-vlan)#vlan 105 name RD5 media ethernet  
Console(config-vlan)#
```

Related Commands

show vlan (4-197)

Configuring VLAN Interfaces

Table 4-58 Commands for Configuring VLAN Interfaces

Command	Function	Mode	Page
interface vlan	Enters interface configuration mode for a specified VLAN	IC	4-191
switchport mode	Configures VLAN membership mode for an interface	IC	4-192
switchport acceptable-frame-types	Configures frame types to be accepted by an interface	IC	4-192
switchport ingress-filtering	Enables ingress filtering on an interface	IC	4-193
switchport native vlan	Configures the PVID (native VLAN) of an interface	IC	4-194
switchport allowed vlan	Configures the VLANs associated with an interface	IC	4-195
switchport gvrp	Enables GVRP for an interface	IC	4-204
switchport forbidden vlan	Configures forbidden VLANs for an interface	IC	4-196
switchport priority default	Sets a port priority for incoming untagged frames	IC	4-209

interface vlan

This command enters interface configuration mode for VLANs, which is used to configure VLAN parameters for a physical interface.

Syntax

interface vlan *vlan-id*

vlan-id - ID of the configured VLAN. (Range: 1-4094, no leading zeroes)

Default Setting

None

Command Mode

Global Configuration

Example

The following example shows how to set the interface configuration mode to VLAN 1, and then assign an IP address to the VLAN:

```
Console(config)#interface vlan 1
Console(config-if)#ip address 192.168.1.254 255.255.255.0
Console(config-if)#
```

Related Commands

shutdown (4-154)

switchport mode

This command configures the VLAN membership mode for a port. Use the **no** form to restore the default.

Syntax

```
switchport mode {trunk | hybrid}  
no switchport mode
```

- **trunk** - Specifies a port as an end-point for a VLAN trunk. A trunk is a direct link between two switches, so the port transmits tagged frames that identify the source VLAN. Note that frames belonging to the port's default VLAN (i.e., associated with the PVID) are also transmitted as tagged frames.
- **hybrid** - Specifies a hybrid VLAN interface. The port may transmit tagged or untagged frames.

Default Setting

All ports are in hybrid mode with the PVID set to VLAN 1.

Command Mode

Interface Configuration (Ethernet, Port Channel)

Example

The following shows how to set the configuration mode to port 1, and then set the switchport mode to hybrid:

```
Console(config)#interface ethernet 1/1  
Console(config-if)#switchport mode hybrid  
Console(config-if)#
```

Related Commands

switchport acceptable-frame-types (4-192)

switchport acceptable-frame-types

This command configures the acceptable frame types for a port. Use the **no** form to restore the default.

Syntax

```
switchport acceptable-frame-types {all | tagged}  
no switchport acceptable-frame-types
```

- **all** - The port accepts all frames, tagged or untagged.
- **tagged** - The port only receives tagged frames.

Default Setting

All frame types

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

When set to receive all frame types, any received frames that are untagged are assigned to the default VLAN.

Example

The following example shows how to restrict the traffic received on port 1 to tagged frames:

```
Console(config)#interface ethernet 1/1
Console(config-if)#switchport acceptable-frame-types tagged
Console(config-if)#
```

Related Commands

switchport mode (4-192)

switchport ingress-filtering

This command enables ingress filtering for an interface. Use the **no** form to restore the default.

Syntax

[no] switchport ingress-filtering

Default Setting

Disabled

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- Ingress filtering only affects tagged frames.
- If ingress filtering is disabled and a port receives frames tagged for VLANs for which it is not a member, these frames will be flooded to all other ports (except for those VLANs explicitly forbidden on this port).
- If ingress filtering is enabled and a port receives frames tagged for VLANs for which it is not a member, these frames will be discarded.
- Ingress filtering does not affect VLAN independent BPDU frames, such as GVRP or STA. However, they do affect VLAN dependent BPDU frames, such as GMRP.

4 Command Line Interface

Example

The following example shows how to set the interface to port 1 and then enable ingress filtering:

```
Console(config)#interface ethernet 1/1
Console(config-if)#switchport ingress-filtering
Console(config-if)#
```

switchport native vlan

This command configures the PVID (i.e., default VLAN ID) for a port. Use the **no** form to restore the default.

Syntax

switchport native vlan *vlan-id*
no switchport native vlan

vlan-id - Default VLAN ID for a port. (Range: 1-4094, no leading zeroes)

Default Setting

VLAN 1

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- If an interface is not a member of VLAN 1 and you assign its PVID to this VLAN, the interface will automatically be added to VLAN 1 as an untagged member. For all other VLANs, an interface must first be configured as an untagged member before you can assign its PVID to that group.
- If acceptable frame types is set to **all** or switchport mode is set to **hybrid**, the PVID will be inserted into all untagged frames entering the ingress port.

Example

The following example shows how to set the PVID for port 1 to VLAN 3:

```
Console(config)#interface ethernet 1/1
Console(config-if)#switchport native vlan 3
Console(config-if)#
```

switchport allowed vlan

This command configures VLAN groups on the selected interface. Use the **no** form to restore the default.

Syntax

```
switchport allowed vlan {add vlan-list [tagged | untagged] |  
  remove vlan-list}  
no switchport allowed vlan
```

- **add** *vlan-list* - List of VLAN identifiers to add.
- **remove** *vlan-list* - List of VLAN identifiers to remove.
- *vlan-list* - Separate nonconsecutive VLAN identifiers with a comma and no spaces; use a hyphen to designate a range of IDs. Do not enter leading zeros. (Range: 1-4094).

Default Setting

- All ports are assigned to VLAN 1 by default.
- The default frame type is untagged.

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- A port, or a trunk with switchport mode set to **hybrid**, must be assigned to at least one VLAN as untagged.
- If a trunk has switchport mode set to **trunk** (i.e., 1Q Trunk), then you can only assign an interface to VLAN groups as a tagged member.
- Frames are always tagged within the switch. The tagged/untagged parameter used when adding a VLAN to an interface tells the switch whether to keep or remove the tag from a frame on egress.
- If none of the intermediate network devices nor the host at the other end of the connection supports VLANs, the interface should be added to these VLANs as an untagged member. Otherwise, it is only necessary to add at most one VLAN as untagged, and this should correspond to the native VLAN for the interface.
- If a VLAN on the forbidden list for an interface is manually added to that interface, the VLAN is automatically removed from the forbidden list for that interface.

Example

The following example shows how to add VLANs 1, 2, 5 and 6 to the allowed list as tagged VLANs for port 1:

```
Console(config)#interface ethernet 1/1  
Console(config-if)#switchport allowed vlan add 1,2,5,6 tagged  
Console(config-if)#
```

4 Command Line Interface

switchport forbidden vlan

This command configures forbidden VLANs. Use the **no** form to remove the list of forbidden VLANs.

Syntax

```
switchport forbidden vlan {add vlan-list | remove vlan-list}  
no switchport forbidden vlan
```

- **add** *vlan-list* - List of VLAN identifiers to add.
- **remove** *vlan-list* - List of VLAN identifiers to remove.
- *vlan-list* - Separate nonconsecutive VLAN identifiers with a comma and no spaces; use a hyphen to designate a range of IDs. Do not enter leading zeros. (Range: 1-4094).

Default Setting

No VLANs are included in the forbidden list.

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- This command prevents a VLAN from being automatically added to the specified interface via GVRP.
- If a VLAN has been added to the set of allowed VLANs for an interface, then you cannot add it to the set of forbidden VLANs for that same interface.

Example

The following example shows how to prevent port 1 from being added to VLAN 3:

```
Console(config)#interface ethernet 1/1  
Console(config-if)#switchport forbidden vlan add 3  
Console(config-if)#
```


Displaying VLAN Information

Table 4-59 Commands for Displaying VLAN Information

Command	Function	Mode	Page
show vlan	Shows VLAN information	NE, PE	4-197
show interfaces status vlan	Displays status for the specified VLAN interface	NE, PE	4-156
show interfaces switchport	Displays the administrative and operational status of an interface	NE, PE	4-158

show vlan

This command shows VLAN information.

Syntax

show vlan [*id* *vlan-id* | *name* *vlan-name*]

- **id** - Keyword to be followed by the VLAN ID.
vlan-id - ID of the configured VLAN. (Range: 1-4094, no leading zeroes)
- **name** - Keyword to be followed by the VLAN name.
vlan-name - ASCII string from 1 to 32 characters.

Default Setting

Shows all VLANs.

Command Mode

Normal Exec, Privileged Exec

Example

The following example shows how to display information for VLAN 1:

```

Console#show vlan id 1
VLAN Type      Name                Status  Ports/Channel groups
-----
 1  Static      DefaultVlan        Active  Eth1/ 1 Eth1/ 2 Eth1/ 3 Eth1/ 4 Eth1/ 5
                                   Eth1/ 6 Eth1/ 7 Eth1/ 8 Eth1/ 9 Eth1/10
                                   Eth1/11 Eth1/12
Console#

```

Configuring Private VLANs

Private VLANs provide port-based security and isolation between ports within the assigned VLAN. This section describes commands used to configure private VLANs.

Table 4-60 Private VLAN Commands

Command	Function	Mode	Page
<code>pvlan</code>	Enables and configures private VLANs	GC	4-198
<code>show pvlan</code>	Displays the configured private VLANs	PE	4-199

`pvlan`

This command enables or configures a private VLAN. Use the **no** form to disable the private VLAN.

Syntax

```
pvlan [up-link interface-list down-link interface-list]  
no pvlan
```

- **up-link** – Specifies an uplink interface.
- **down-link** – Specifies a downlink interface.

Default Setting

No private VLANs are defined.

Command Mode

Global Configuration

Command Usage

- A private VLAN provides port-based security and isolation between ports within the VLAN. Data traffic on the downlink ports can only be forwarded to, and from, the uplink port.
- Private VLANs and normal VLANs can exist simultaneously within the same switch.
- Entering the **pvlan** command without any parameters enables the private VLAN. Entering **no pvlan** disables the private VLAN.

Example

This example enables the private VLAN, and then sets port 12 as the uplink and ports 1-8 as the downlinks.

```
Console(config)#pvlan  
Console(config)#pvlan up-link ethernet 1/12 down-link ethernet 1/1-8  
Console(config)#
```

show pvlan

This command displays the configured private VLAN.

Command Mode

Privileged Exec

Example

```
Console#show pvlan
Private VLAN status: Enabled
Up-link port:
 Ethernet 1/12
Down-link port:
 Ethernet 1/1-8
Console#
```

Configuring Protocol-based VLANs

The network devices required to support multiple protocols cannot be easily grouped into a common VLAN. This may require non-standard devices to pass traffic between different VLANs in order to encompass all the devices participating in a specific protocol. This kind of configuration deprives users of the basic benefits of VLANs, including security and easy accessibility.

To avoid these problems, you can configure this switch with protocol-based VLANs that divide the physical network into logical VLAN groups for each required protocol. When a frame is received at a port, its VLAN membership can then be determined based on the protocol type in use by the inbound packets.

Table 4-61 Protocol-based VLAN Commands

Command	Function	Mode	Page
protocol-vlan protocol-group	Create a protocol group, specifying the supported protocols	GC	4-200
protocol-vlan protocol-group	Maps a protocol group to a VLAN	IC	4-200
show protocol-vlan protocol-group	Shows the configuration of protocol groups	PE	4-201
show interfaces protocol-vlan protocol-group	Shows the interfaces mapped to a protocol group and the corresponding VLAN	PE	4-202

To configure protocol-based VLANs, follow these steps:

1. First configure VLAN groups for the protocols you want to use (page 4-190). Although not mandatory, we suggest configuring a separate VLAN for each major protocol running on your network. Do not add port members at this time.
2. Create a protocol group for each of the protocols you want to assign to a VLAN using the **protocol-vlan protocol-group** command (General Configuration mode).
3. Then map the protocol for each interface to the appropriate VLAN using the **protocol-vlan protocol-group** command (Interface Configuration mode).

4 Command Line Interface

protocol-vlan protocol-group (Configuring Groups)

This command creates a protocol group, or to add specific protocols to a group. Use the **no** form to remove a protocol group.

Syntax

```
protocol-vlan protocol-group group-id [{add | remove} frame-type frame  
protocol-type protocol]
```

```
no protocol-vlan protocol-group group-id
```

- *group-id* - Group identifier of this protocol group. (Range: 1-2147483647)
- *frame*³³ - Frame type used by this protocol. (Options: ethernet, rfc_1042, llc_other)
- *protocol* - Protocol type. The only option for the llc_other frame type is ipx_raw. The options for all other frames types include: ip, arp, rarp.

Default Setting

No protocol groups are configured.

Command Mode

Global Configuration

Example

The following creates protocol group 1, and specifies Ethernet frames with IP and ARP protocol types:

```
Console(config)#protocol-vlan protocol-group 1 add frame-type ethernet  
protocol-type ip  
Console(config)#protocol-vlan protocol-group 1 add frame-type ethernet  
protocol-type arp  
Console(config)#
```

protocol-vlan protocol-group (Configuring Interfaces)

This command maps a protocol group to a VLAN for the current interface. Use the **no** form to remove the protocol mapping for this interface.

Syntax

```
protocol-vlan protocol-group group-id vlan vlan-id  
no protocol-vlan protocol-group group-id vlan
```

- *group-id* - Group identifier of this protocol group. (Range: 1-2147483647)
- *vlan-id* - VLAN to which matching protocol traffic is forwarded. (Range: 1-4094)

Default Setting

No protocol groups are mapped for any interface.

³³. SNAP frame types are not supported by this switch due to hardware limitations.

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- When creating a protocol-based VLAN, only assign interfaces via this command. If you assign interfaces using any of the other VLAN commands (such as **vlan** on page 4-190), these interfaces will admit traffic of any protocol type into the associated VLAN.
- When a frame enters a port that has been assigned to a protocol VLAN, it is processed in the following manner:
 - If the frame is tagged, it will be processed according to the standard rules applied to tagged frames.
 - If the frame is untagged and the protocol type matches, the frame is forwarded to the appropriate VLAN.
 - If the frame is untagged but the protocol type does not match, the frame is forwarded to the default VLAN for this interface.

Example

The following example maps the traffic entering Port 1 which matches the protocol type specified in protocol group 1 to VLAN 2.

```
Console(config)#interface ethernet 1/1
Console(config-if)#protocol-vlan protocol-group 1 vlan 2
Console(config-if)#
```

show protocol-vlan protocol-group

This command shows the frame and protocol type associated with protocol groups.

Syntax

show protocol-vlan protocol-group [*group-id*]

group-id - Group identifier for a protocol group. (Range: 1-2147483647)

Default Setting

All protocol groups are displayed.

Command Mode

Privileged Exec

Example

This shows protocol group 1 configured for IP over Ethernet:

```
Console#show protocol-vlan protocol-group

ProtocolGroup ID   Frame Type   Protocol Type
-----
1                  ethernet    08 00
Console#
```

4 Command Line Interface

show interfaces protocol-vlan protocol-group

This command shows the mapping from protocol groups to VLANs for the selected interfaces.

Syntax

```
show interfaces protocol-vlan protocol-group [interface]
```

interface

- **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.
- **port-channel** *channel-id* (Range: 1-6)

Default Setting

The mapping for all interfaces is displayed.

Command Mode

Privileged Exec

Example

This shows that traffic entering Port 1 that matches the specifications for protocol group 1 will be mapped to VLAN 2:

```
Console#show interfaces protocol-vlan protocol-group

  Port      ProtocolGroup ID    VLAN ID
-----
  Eth 1/1          1          vlan2
Console#
```

GVRP and Bridge Extension Commands

GARP VLAN Registration Protocol defines a way for switches to exchange VLAN information in order to automatically register VLAN members on interfaces across the network. This section describes how to enable GVRP for individual interfaces and globally for the switch, as well as how to display default configuration settings for the Bridge Extension MIB.

Table 4-62 GVRP and Bridge Extension Commands

Command	Function	Mode	Page
bridge-ext gvrp	Enables GVRP globally for the switch	GC	4-203
show bridge-ext	Shows the global bridge extension configuration	PE	4-204
switchport gvrp	Enables GVRP for an interface	IC	4-204
switchport forbidden vlan	Configures forbidden VLANs for an interface	IC	4-196
show gvrp configuration	Displays GVRP configuration for the selected interface	NE, PE	4-205
garp timer	Sets the GARP timer for the selected function	IC	4-205
show garp timer	Shows the GARP timer for the selected function	NE, PE	4-206

bridge-ext gvrp

This command enables GVRP globally for the switch. Use the **no** form to disable it.

Syntax

[no] bridge-ext gvrp

Default Setting

Disabled

Command Mode

Global Configuration

Command Usage

GVRP defines a way for switches to exchange VLAN information in order to register VLAN members on ports across the network. This function should be enabled to permit automatic VLAN registration, and to support VLANs which extend beyond the local switch.

Example

```
Console(config)#bridge-ext gvrp
Console(config)#
```

4 Command Line Interface

show bridge-ext

This command shows the configuration for bridge extension commands.

Default Setting

None

Command Mode

Privileged Exec

Command Usage

See “Displaying Basic VLAN Information” on page 3-121 and “Displaying Bridge Extension Capabilities” on page 3-14 for a description of the displayed items.

Example

```
Console#show bridge-ext
Max support vlan numbers: 255
Max support vlan ID: 4094
Extended multicast filtering services: No
Static entry individual port: Yes
VLAN learning: I/VL
Configurable PVID tagging: Yes
Local VLAN capable: Yes
Traffic classes: Enabled
Global GVRP status: Disabled
GMRP: Disabled
Console#
```

switchport gvrp

This command enables GVRP for a port. Use the **no** form to disable it.

Syntax

[no] switchport gvrp

Default Setting

Disabled

Command Mode

Interface Configuration (Ethernet, Port Channel)

Example

```
Console(config)#interface ethernet 1/1
Console(config-if)#switchport gvrp
Console(config-if)#
```


show gvrp configuration

This command shows if GVRP is enabled.

Syntax

```
show gvrp configuration [interface]
```

interface

- **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.
- **port-channel** *channel-id* (Range: 1-6)

Default Setting

Shows both global and interface-specific configuration.

Command Mode

Normal Exec, Privileged Exec

Example

```
Console#show gvrp configuration ethernet 1/7
Eth 1/ 7:
  Gvrp configuration: Disabled
Console#
```

garp timer

This command sets the values for the join, leave and leaveall timers. Use the **no** form to restore the timers' default values.

Syntax

```
garp timer {join | leave | leaveall} timer_value
no garp timer {join | leave | leaveall}
```

- {*join* | *leave* | *leaveall*} - Which timer to set.
- *timer_value* - Value of timer.
Ranges:
join: 20-1000 centiseconds
leave: 60-3000 centiseconds
leaveall: 500-18000 centiseconds

Default Setting

- join: 20 centiseconds
- leave: 60 centiseconds
- leaveall: 1000 centiseconds

Command Mode

Interface Configuration (Ethernet, Port Channel)

4 Command Line Interface

Command Usage

- Group Address Registration Protocol is used by GVRP and GMRP to register or deregister client attributes for client services within a bridged LAN. The default values for the GARP timers are independent of the media access method or data rate. These values should not be changed unless you are experiencing difficulties with GMRP or GVRP registration/deregistration.
- Timer values are applied to GVRP for all the ports on all VLANs.
- Timer values must meet the following restrictions:
 - leave \geq (2 x join)
 - leaveall > leave

Note: Set GVRP timers on all Layer 2 devices connected in the same network to the same values. Otherwise, GVRP may not operate successfully.

Example

```
Console(config)#interface ethernet 1/1
Console(config-if)#garp timer join 100
Console(config-if)#
```

Related Commands

show garp timer (4-206)

show garp timer

This command shows the GARP timers for the selected interface.

Syntax

show garp timer [*interface*]

interface

- **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.
- **port-channel** *channel-id* (Range: 1-6)

Default Setting

Shows all GARP timers.

Command Mode

Normal Exec, Privileged Exec

Example

```
Console#show garp timer ethernet 1/1
Eth 1/ 1 GARP timer status:
  Join timer: 20 centiseconds
  Leave timer: 60 centiseconds
  Leaveall timer: 1000 centiseconds
Console#
```

Related Commands

garp timer (4-205)

Priority Commands

The commands described in this section allow you to specify which data packets have greater precedence when traffic is buffered in the switch due to congestion. This switch supports CoS with eight priority queues for each port. Data packets in a port's high-priority queue will be transmitted before those in the lower-priority queues. You can set the default priority for each interface, the relative weight of each queue, and the mapping of frame priority tags to the switch's priority queues.

Table 4-63 Priority Commands

Command Groups	Function	Page
Priority (Layer 2)	Configures default priority for untagged frames, sets queue weights, and maps class of service tags to hardware queues	4-207
Priority (Layer 3 and 4)	Maps TCP ports, IP precedence tags, or IP DSCP tags to class of service values	4-213

Priority Commands (Layer 2)

Table 4-64 Priority Commands (Layer 2)

Command	Function	Mode	Page
queue mode	Sets the queue mode to strict priority or Weighted Round-Robin (WRR)	GC	4-208
switchport priority default	Sets a port priority for incoming untagged frames	IC	4-209
queue bandwidth	Assigns round-robin weights to the priority queues	IC	4-210
queue cos map	Assigns class-of-service values to the priority queues	IC	4-210
show queue mode	Shows the current queue mode	PE	4-211
show queue bandwidth	Shows round-robin weights assigned to the priority queues	PE	4-212
show queue cos-map	Shows the class-of-service map	PE	4-212
show interfaces switchport	Displays the administrative and operational status of an interface	PE	4-158

4 Command Line Interface

queue mode

This command sets the queue mode to strict priority or Weighted Round-Robin (WRR) for the class of service (CoS) priority queues. Use the **no** form to restore the default value.

Syntax

```
queue mode {strict | wrr}  
no queue mode
```

- **strict** - Services the egress queues in sequential order, transmitting all traffic in the higher priority queues before servicing lower priority queues.
- **wrr** - Weighted Round-Robin shares bandwidth at the egress ports by using scheduling weights 1, 2, 4, 6, 8, 10, 12, 14 for queues 0 - 7 respectively.

Default Setting

Weighted Round Robin

Command Mode

Global Configuration

Command Usage

You can set the switch to service the queues based on a strict rule that requires all traffic in a higher priority queue to be processed before lower priority queues are serviced, or use Weighted Round-Robin (WRR) queuing that specifies a relative weight of each queue. WRR uses a predefined relative weight for each queue that determines the percentage of service time the switch services each queue before moving on to the next queue. This prevents the head-of-line blocking that can occur with strict priority queuing.

Example

The following example sets the queue mode to strict priority service mode:

```
Console(config)#queue mode strict  
Console(config)#
```

switchport priority default

This command sets a priority for incoming untagged frames. Use the **no** form to restore the default value.

Syntax

switchport priority default *default-priority-id*

no switchport priority default

default-priority-id - The priority number for untagged ingress traffic.

The priority is a number from 0 to 7. Seven is the highest priority.

Default Setting

The priority is not set, and the default value for untagged frames received on the interface is zero.

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- The precedence for priority mapping is IP Port, IP Precedence or IP DSCP, and default switchport priority.
- The default priority applies for an untagged frame received on a port set to accept all frame types (i.e., receives both untagged and tagged frames). This priority does not apply to IEEE 802.1Q VLAN tagged frames. If the incoming frame is an IEEE 802.1Q VLAN tagged frame, the IEEE 802.1p User Priority bits will be used.
- This switch provides eight priority queues for each port. It is configured to use Weighted Round Robin, which can be viewed with the **show queue bandwidth** command. Inbound frames that do not have VLAN tags are tagged with the input port's default ingress user priority, and then placed in the appropriate priority queue at the output port. The default priority for all ingress ports is zero. Therefore, any inbound frames that do not have priority tags will be placed in queue 0 of the output port. (Note that if the output port is an untagged member of the associated VLAN, these frames are stripped of all VLAN tags prior to transmission.)

Example

The following example shows how to set a default priority on port 3 to 5:

```
Console(config)#interface ethernet 1/3
Console(config-if)#switchport priority default 5
```

4 Command Line Interface

queue bandwidth

This command assigns weighted round-robin (WRR) weights to the eight class of service (CoS) priority queues. Use the **no** form to restore the default weights.

Syntax

```
queue bandwidth weight1...weight4  
no queue bandwidth
```

weight1...weight4 - The ratio of weights for queues 0 - 7 determines the weights used by the WRR scheduler. (Range: 1 - 15)

Default Setting

Weights 1, 2, 4, 6, 8, 10, 12, 14 are assigned to queues 0 - 7 respectively.

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

WRR controls bandwidth sharing at the egress port by defining scheduling weights.

Example

This example shows how to assign WRR weights to each of the priority queues:

```
Console(config)#queue bandwidth 1 3 5 7 9 11 13 15  
Console(config)#
```

Related Commands

show queue bandwidth (4-212)

queue cos-map

This command assigns class of service (CoS) values to the priority queues (i.e., hardware output queues 0 - 7). Use the **no** form set the CoS map to the default values.

Syntax

```
queue cos-map queue_id [cos1 ... cosn]  
no queue cos-map
```

- *queue_id* - The ID of the priority queue.
Ranges are 0 to 7, where 7 is the highest priority queue.
- *cos1 .. cosn* - The CoS values that are mapped to the queue ID. It is a space-separated list of numbers. The CoS value is a number from 0 to 7, where 7 is the highest priority.

Default Setting

This switch supports Class of Service by using eight priority queues, with Weighted Round Robin queuing for each port. Eight separate traffic classes are defined in IEEE 802.1p. The default priority levels are assigned according to recommendations in the IEEE 802.1p standard as shown below.

Table 4-65 Default CoS Priority Levels

Queue	0	1	2	3	4	5	6	7
Priority	2	0	1	3	4	5	6	7

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- CoS values assigned at the ingress port are also used at the egress port.
- This command sets the CoS priority for all interfaces.

Example

The following example shows how to change the CoS assignments to a one-to-one mapping:

```

Console(config)#interface ethernet 1/1
Console(config-if)#queue cos-map 0 0
Console(config-if)#queue cos-map 1 1
Console(config-if)#queue cos-map 2 2
Console(config-if)#exit
Console#show queue cos-map ethernet 1/1
Information of Eth 1/1
  Traffic Class : 0 1 2 3 4 5 6 7
  Priority Queue: 0 1 2 3 4 5 6 7
Console#

```

Related Commands

show queue cos-map (4-212)

show queue mode

This command shows the current queue mode.

Default Setting

None

Command Mode

Privileged Exec

4 Command Line Interface

Example

```
Console#sh queue mode
Wrr status: Enabled
Console#
```

show queue bandwidth

This command displays the weighted round-robin (WRR) bandwidth allocation for the eight priority queues.

Default Setting

None

Command Mode

Privileged Exec

Example

```
Console#show queue bandwidth
Information of Eth 1/1
Queue ID  Weight
-----  -
0         1
1         2
2         4
3         6
4         8
5         10
6         12
7         14
:
Console#
```

show queue cos-map

This command shows the class of service priority map.

Syntax

```
show queue cos-map [interface]
```

interface

- **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.
- **port-channel** *channel-id* (Range: 1-6)

Default Setting

None

Command Mode

Privileged Exec

Example

```

Console#show queue cos-map ethernet 1/1
Information of Eth 1/1
  CoS Value      : 0 1 2 3 4 5 6 7
  Priority Queue: 2 0 1 3 4 5 6 7
Console#

```

Priority Commands (Layer 3 and 4)**Table 4-66 Priority Commands (Layer 3 and 4)**

Command	Function	Mode	Page
map ip port	Enables TCP/UDP class of service mapping	GC	4-213
map ip port	Maps TCP/UDP socket to a class of service	IC	4-214
map ip precedence	Enables IP precedence class of service mapping	GC	4-214
map ip precedence	Maps IP precedence value to a class of service	IC	4-215
map ip dscp	Enables IP DSCP class of service mapping	GC	4-216
map ip dscp	Maps IP DSCP value to a class of service	IC	4-216
map access-list ip	Sets the CoS value and corresponding output queue for packets matching an ACL rule	IC	4-99
map access-list mac	Sets the CoS value and corresponding output queue for packets matching an ACL rule	IC	4-109
show map ip port	Shows the IP port map	PE	4-217
show map ip precedence	Shows the IP precedence map	PE	4-218
show map ip dscp	Shows the IP DSCP map	PE	4-219
show map access-list ip	Shows CoS value mapped to an access list for an interface	PE	4-100
show map access-list mac	Shows CoS value mapped to an access list for an interface	PE	4-110

map ip port (Global Configuration)

This command enables IP port mapping (i.e., class of service mapping for TCP/UDP sockets). Use the **no** form to disable IP port mapping.

Syntax

[no] map ip port

Default Setting

Disabled

Command Mode

Global Configuration

Command Usage

The precedence for priority mapping is IP Port, IP Precedence or IP DSCP, and default switchport priority.

4 Command Line Interface

Example

The following example shows how to enable TCP/UDP port mapping globally:

```
Console(config)#map ip port
Console(config)#
```

map ip port (Interface Configuration)

This command sets IP port priority (i.e., TCP/UDP port priority). Use the **no** form to remove a specific setting.

Syntax

```
map ip port port-number cos cos-value
no map ip port port-number
```

- *port-number* - 16-bit TCP/UDP port number. (Range: 0-65535)
- *cos-value* - Class-of-Service value (Range: 0-7)

Default Setting

None

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- The precedence for priority mapping is IP Port, IP Precedence or IP DSCP, and default switchport priority.
- This command sets the IP port priority for all interfaces.

Example

The following example shows how to map HTTP traffic to CoS value 0:

```
Console(config)#interface ethernet 1/5
Console(config-if)#map ip port 80 cos 0
Console(config-if)#
```

map ip precedence (Global Configuration)

This command enables IP precedence mapping (i.e., IP Type of Service). Use the **no** form to disable IP precedence mapping.

Syntax

```
[no] map ip precedence
```

Default Setting

Disabled

Command Mode

Global Configuration

Command Usage

- The precedence for priority mapping is IP Port, IP Precedence or IP DSCP, and default switchport priority.
- IP Precedence and IP DSCP cannot both be enabled. Enabling one of these priority types will automatically disable the other type.

Example

The following example shows how to enable IP precedence mapping globally:

```
Console(config)#map ip precedence
Console(config)#
```

map ip precedence (Interface Configuration)

This command sets IP precedence priority (i.e., IP Type of Service priority). Use the **no** form to restore the default table.

Syntax

```
map ip precedence ip-precedence-value cos cos-value
no map ip precedence
```

- *precedence-value* - 3-bit precedence value. (Range: 0-7)
- *cos-value* - Class-of-Service value (Range: 0-7)

Default Setting

The list below shows the default priority mapping.

Table 4-67 Mapping IP Precedence to CoS Values

IP Precedence Value	0	1	2	3	4	5	6	7
CoS Value	0	1	2	3	4	5	6	7

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- The precedence for priority mapping is IP Port, IP Precedence or IP DSCP, and default switchport priority.
- IP Precedence values are mapped to default Class of Service values on a one-to-one basis according to recommendations in the IEEE 802.1p standard, and then subsequently mapped to the eight hardware priority queues.
- This command sets the IP Precedence for all interfaces.

Example

The following example shows how to map IP precedence value 1 to CoS value 0:

```
Console(config)#interface ethernet 1/5
Console(config-if)#map ip precedence 1 cos 0
Console(config-if)#
```

4 Command Line Interface

map ip dscp (Global Configuration)

This command enables IP DSCP mapping (i.e., Differentiated Services Code Point mapping). Use the **no** form to disable IP DSCP mapping.

Syntax

[no] map ip dscp

Default Setting

Disabled

Command Mode

Global Configuration

Command Usage

- The precedence for priority mapping is IP Port, IP Precedence or IP DSCP, and default switchport priority.
- IP Precedence and IP DSCP cannot both be enabled. Enabling one of these priority types will automatically disable the other type.

Example

The following example shows how to enable IP DSCP mapping globally:

```
Console(config)#map ip dscp
Console(config)#
```

map ip dscp (Interface Configuration)

This command sets IP DSCP priority (i.e., Differentiated Services Code Point priority). Use the **no** form to restore the default table.

Syntax

map ip dscp *dscp-value* cos *cos-value*

no map ip dscp

- *dscp-value* - 8-bit DSCP value. (Range: 0-63)
- *cos-value* - Class-of-Service value (Range: 0-7)

Default Setting

The DSCP default values are defined in the following table. Note that all the DSCP values that are not specified are mapped to CoS value 0.

Table 4-68 Mapping IP DSCP to CoS Values

IP DSCP Value	CoS Value
0	0
8	1
10, 12, 14, 16	2
18, 20, 22, 24	3
26, 28, 30, 32, 34, 36	4
38, 40, 42	5
48	6
46, 56	7

Command Mode

Interface Configuration (Ethernet, Port Channel)

Command Usage

- The precedence for priority mapping is IP Port, IP Precedence or IP DSCP, and default switchport priority.
- DSCP priority values are mapped to default Class of Service values according to recommendations in the IEEE 802.1p standard, and then subsequently mapped to the eight hardware priority queues.
- This command sets the IP DSCP priority for all interfaces.

Example

The following example shows how to map IP DSCP value 1 to CoS value 0:

```
Console(config)#interface ethernet 1/5
Console(config-if)#map ip dscp 1 cos 0
Console(config-if)#
```

show map ip port

This command shows the IP port priority map.

Syntax

show map ip port [*interface*]

interface

- **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.
- **port-channel** *channel-id* (Range: 1-6)

4 Command Line Interface

Default Setting

None

Command Mode

Privileged Exec

Example

The following shows that HTTP traffic has been mapped to CoS value 0:

```
Console#show map ip port
TCP port mapping status: disabled

Port          Port no.  COS
-----
Eth 1/ 5      80       0
Console#
```

Related Commands

map ip port (Global Configuration) (4-213)
map ip port (Interface Configuration) (4-214)

show map ip precedence

This command shows the IP precedence priority map.

Syntax

show map ip precedence [*interface*]

interface

- **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.
- **port-channel** *channel-id* (Range: 1-6)

Default Setting

None

Command Mode

Privileged Exec

Example

```
Console#show map ip precedence ethernet 1/5
Precedence mapping status: disabled
```

Port	Precedence	COS
Eth 1/ 5	0	0
Eth 1/ 5	1	1
Eth 1/ 5	2	2
Eth 1/ 5	3	3
Eth 1/ 5	4	4
Eth 1/ 5	5	5
Eth 1/ 5	6	6
Eth 1/ 5	7	7

```
Console#
```

Related Commands

- map ip precedence (Global Configuration) (4-214)
- map ip precedence (Interface Configuration) (4-215)

show map ip dscp

This command shows the IP DSCP priority map.

Syntax

```
show map ip dscp [interface]
```

interface

- **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.
- **port-channel** *channel-id* (Range: 1-6)

Default Setting

None

Command Mode

Privileged Exec

4 Command Line Interface

Example

```
Console#show map ip dscp ethernet 1/1
DSCP mapping status: disabled

Port          DSCP  COS
-----
Eth 1/ 1     0    0
Eth 1/ 1     1    0
Eth 1/ 1     2    0
Eth 1/ 1     3    0
.
.
Eth 1/ 1     61   0
Eth 1/ 1     62   0
Eth 1/ 1     63   0
Console#
```

Related Commands

- map ip dscp (Global Configuration) (4-216)
- map ip dscp (Interface Configuration) (4-216)

Multicast Filtering Commands

This switch uses IGMP (Internet Group Management Protocol) to query for any attached hosts that want to receive a specific multicast service. It identifies the ports containing hosts requesting a service and sends data out to those ports only. It then propagates the service request up to any neighboring multicast switch/router to ensure that it will continue to receive the multicast service.

Note that IGMP query can be enabled globally at Layer 2, or enabled for specific VLAN interfaces at Layer 3. (Layer 2 query is disabled if Layer 3 query is enabled.)

Table 4-69 Multicast Filtering Commands

Command Groups	Function	Page
IGMP Snooping	Configures multicast groups via IGMP snooping or static assignment, sets the IGMP version, displays current snooping and query settings, and displays the multicast service and group members	4-221
IGMP Query (Layer 2)	Configures IGMP query parameters for multicast filtering at Layer 2	4-224
Static Multicast Routing	Configures static multicast router ports	4-227
IGMP (Layer 3)	Configures the IGMP protocol used with multicast routing	4-229

IGMP Snooping Commands

Table 4-70 IGMP Snooping Commands

Command	Function	Mode	Page
ip igmp snooping	Enables IGMP snooping	GC	4-221
ip igmp snooping vlan static	Adds an interface as a member of a multicast group	GC	4-221
ip igmp snooping version	Configures the IGMP version for snooping	GC	4-222
show ip igmp snooping	Shows the IGMP snooping and query configuration	PE	4-222
show mac-address-table multicast	Shows the IGMP snooping MAC multicast list	PE	4-223

ip igmp snooping

This command enables IGMP snooping on this switch. Use the **no** form to disable it.

Syntax

[no] ip igmp snooping

Default Setting

Enabled

Command Mode

Global Configuration

Example

The following example enables IGMP snooping.

```
Console(config)#ip igmp snooping
Console(config)#
```

ip igmp snooping vlan static

This command adds a port to a multicast group. Use the **no** form to remove the port.

Syntax

[no] ip igmp snooping vlan *vlan-id* static *ip-address* *interface*

- *vlan-id* - VLAN ID (Range: 1-4094)
- *ip-address* - IP address for multicast group
- *interface*
 - **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.
 - **port-channel** *channel-id* (Range: 1-6)

Default Setting

None

4 Command Line Interface

Command Mode

Global Configuration

Example

The following shows how to statically configure a multicast group on a port:

```
Console(config)#ip igmp snooping vlan 1 static 224.0.0.12 ethernet 1/5
Console(config)#
```

ip igmp snooping version

This command configures the IGMP snooping version. Use the **no** form to restore the default.

Syntax

ip igmp snooping version {1 | 2}

no ip igmp snooping version

- 1 - IGMP Version 1
- 2 - IGMP Version 2

Default Setting

IGMP Version 2

Command Mode

Global Configuration

Command Usage

- All systems on the subnet must support the same version. If there are legacy devices in your network that only support Version 1, you will also have to configure this switch to use Version 1.
- Some commands are only enabled for IGMPv2, including **ip igmp query-max-response-time** and **ip igmp query-timeout**.

Example

The following configures the switch to use IGMP Version 1:

```
Console(config)#ip igmp snooping version 1
Console(config)#
```

show ip igmp snooping

This command shows the IGMP snooping configuration.

Default Setting

None

Command Mode

Privileged Exec

Command Usage

See “Configuring IGMP Snooping and Query Parameters” on page 3-149 for a description of the displayed items.

Example

The following shows the current IGMP snooping configuration:

```
Console#show ip igmp snooping
Service status: Enabled
Querier status: Enabled
Query count: 2
Query interval: 125 sec
Query max response time: 10 sec
Router port expire time: 300 sec
IGMP snooping version: Version 2
Console#
```

show mac-address-table multicast

This command shows known multicast addresses.

Syntax

```
show mac-address-table multicast [vlan vlan-id] [user | igmp-snooping]
```

- *vlan-id* - VLAN ID (1 to 4094)
- **user** - Display only the user-configured multicast entries.
- **igmp-snooping** - Display only entries learned through IGMP snooping.

Default Setting

None

Command Mode

Privileged Exec

Command Usage

Member types displayed include IGMP or USER, depending on selected options.

Example

The following shows the multicast entries learned through IGMP snooping for VLAN 1:

```
Console#show mac-address-table multicast vlan 1 igmp-snooping
VLAN M'cast IP addr. Member ports Type
-----
1      224.1.1.2.3      Eth1/11      IGMP
Console#
```

IGMP Query Commands (Layer 2)

Table 4-71 IGMP Query Commands (Layer 2)

Command	Function	Mode	Page
ip igmp snooping querier	Allows this device to act as the querier for IGMP snooping	GC	4-224
ip igmp snooping query-count	Configures the query count	GC	4-224
ip igmp snooping query-interval	Configures the query interval	GC	4-225
ip igmp snooping query-max-response-time	Configures the report delay	GC	4-226
ip igmp snooping router-port-expire-time	Configures the query timeout	GC	4-226

ip igmp snooping querier

This command enables the switch as an IGMP querier. Use the **no** form to disable it.

Syntax

[no] ip igmp snooping querier

Default Setting

Enabled

Command Mode

Global Configuration

Command Usage

If enabled, the switch will serve as querier if elected. The querier is responsible for asking hosts if they want to receive multicast traffic.

Example

```
Console(config)#ip igmp snooping querier
Console(config)#
```

ip igmp snooping query-count

This command configures the query count. Use the **no** form to restore the default.

Syntax

ip igmp snooping query-count *count*
no ip igmp snooping query-count

count - The maximum number of queries issued for which there has been no response before the switch takes action to drop a client from the multicast group. (Range: 2-10)

Default Setting

2 times

Command Mode

Global Configuration

Command Usage

The query count defines how long the querier waits for a response from a multicast client before taking action. If a querier has sent a number of queries defined by this command, but a client has not responded, a countdown timer is started using the time defined by **ip igmp snooping query-max-response-time**. If the countdown finishes, and the client still has not responded, then that client is considered to have left the multicast group.

Example

The following shows how to configure the query count to 10:

```
Console(config)#ip igmp snooping query-count 10
Console(config)#
```

Related Commands

ip igmp snooping query-max-response-time (4-226)

ip igmp snooping query-interval

This command configures the query interval. Use the **no** form to restore the default.

Syntax

```
ip igmp snooping query-interval seconds
no ip igmp snooping query-interval
```

seconds - The frequency at which the switch sends IGMP host-query messages. (Range: 60-125)

Default Setting

125 seconds

Command Mode

Global Configuration

Example

The following shows how to configure the query interval to 100 seconds:

```
Console(config)#ip igmp snooping query-interval 100
Console(config)#
```

ip igmp snooping query-max-response-time

This command configures the query report delay. Use the **no** form to restore the default.

Syntax

ip igmp snooping query-max-response-time *seconds*
no ip igmp snooping query-max-response-time

seconds - The report delay advertised in IGMP queries. (Range: 5-25)

Default Setting

10 seconds

Command Mode

Global Configuration

Command Usage

- The switch must be using IGMPv2 for this command to take effect.
- This command defines the time after a query, during which a response is expected from a multicast client. If a querier has sent a number of queries defined by the **ip igmp snooping query-count**, but a client has not responded, a countdown timer is started using an initial value set by this command. If the countdown finishes, and the client still has not responded, then that client is considered to have left the multicast group.

Example

The following shows how to configure the maximum response time to 20 seconds:

```
Console(config)#ip igmp snooping query-max-response-time 20
Console(config)#
```

Related Commands

- ip igmp snooping version (4-222)
- ip igmp snooping query-max-response-time (4-226)

ip igmp snooping router-port-expire-time

This command configures the query timeout. Use the **no** form to restore the default.

Syntax

ip igmp snooping router-port-expire-time *seconds*
no ip igmp snooping router-port-expire-time

seconds - The time the switch waits after the previous querier stops before it considers the router port (i.e., the interface which had been receiving query packets) to have expired.
(Range: 300-500)

Default Setting

300 seconds

Command Mode

Global Configuration

Command Usage

The switch must use IGMPv2 for this command to take effect.

Example

The following shows how to configure the default timeout to 300 seconds:

```
Console(config)#ip igmp snooping router-port-expire-time 300
Console(config)#
```

Related Commands

ip igmp snooping version (4-222)

Static Multicast Routing Commands

Table 4-72 Static Multicast Routing Commands

Command	Function	Mode	Page
ip igmp snooping vlan mrouter	Adds a multicast router port	GC	4-227
show ip igmp snooping mrouter	Shows multicast router ports	PE	4-228

ip igmp snooping vlan mrouterThis command statically configures a multicast router port. Use the **no** form to remove the configuration.**Syntax**[no] ip igmp snooping vlan *vlan-id* mrouter *interface*

- *vlan-id* - VLAN ID (Range: 1-4094)
- *interface*
 - ethernet *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.
 - port-channel *channel-id* (Range: 1-6)

Default Setting

No static multicast router ports are configured.

Command Mode

Global Configuration

4 Command Line Interface

Command Usage

Depending on your network connections, IGMP snooping may not always be able to locate the IGMP querier. Therefore, if the IGMP querier is a known multicast router/switch connected over the network to an interface (port or trunk) on your router, you can manually configure that interface to join all the current multicast groups.

Example

The following shows how to configure port 11 as a multicast router port within VLAN 1:

```
Console(config)#ip igmp snooping vlan 1 mrouter ethernet 1/11
Console(config)#
```

show ip igmp snooping mrouter

This command displays information on statically configured and dynamically learned multicast router ports.

Syntax

```
show ip igmp snooping mrouter [vlan vlan-id]
```

vlan-id - VLAN ID (Range: 1-4094)

Default Setting

Displays multicast router ports for all configured VLANs.

Command Mode

Privileged Exec

Command Usage

Multicast router port types displayed include Static or Dynamic.

Example

The following shows that port 11 in VLAN 1 is attached to a multicast router:

```
Console#show ip igmp snooping mrouter vlan 1
VLAN M'cast Router Ports Type
-----
  1                Eth 1/11  Static
  2                Eth 1/12  Dynamic
Console#
```


IGMP Commands (Layer 3)

Table 4-73 IGMP Commands (Layer 3)

Command	Function	Mode	Page
ip igmp	Enables IGMP for the specified interface	IC	4-229
ip igmp robustval	Configures the expected packet loss	IC	4-230
ip igmp query-interval	Configures frequency for sending host query messages	IC	4-230
ip igmp max-resp-interval	Configures the maximum host response time	IC	4-231
ip igmp last-memb-query-interval	Configures frequency for sending group-specific host query messages	IC	4-232
ip igmp version	Configures IGMP version used on this interface	IC	4-232
show ip igmp interface	Displays the IGMP configuration for specified interfaces	NE, PE	4-233
clear ip igmp group	Deletes entries from the IGMP cache	PE	4-234
show ip igmp groups	Displays detailed information for IGMP groups	NE, PE	4-234

ip igmp

This command enables IGMP on a VLAN interface. Use the **no** form of this command to disable IGMP on the specified interface.

Syntax

[no] ip igmp

Default Setting

Disabled

Command Mode

Interface Configuration (VLAN)

Command Usage

IGMP query can be enabled globally at Layer 2 via the **ip igmp snooping** command, or enabled for specific VLAN interfaces at Layer 3 via the **ip igmp** command. (Layer 2 query is disabled if Layer 3 query is enabled.)

Example

```

Console(config)#interface vlan 1
Console(config-if)#ip igmp
Console(config-if)#end
Console#show ip igmp interface
Vlan 1 is up
  IGMP is enable, version is 2
  Robustness variable is 2
  Query interval is 125 sec
  Query Max Response Time is 10 sec, Last Member Query Interval is 1 sec
  Querier is 10.1.0.253
Console#

```

4 Command Line Interface

Related Commands

ip igmp snooping (4-221)
show ip igmp snooping (4-222)

ip igmp robustval

This command specifies the robustness (i.e., expected packet loss) for this interface. Use the **no** form of this command to restore the default value.

Syntax

ip igmp robustval *robust-value*
no ip igmp robustval

robust-value - The robustness of this interface. (Range: 1-255)

Default Setting

2

Command Mode

Interface Configuration (VLAN)

Command Usage

The robustness value is used in calculating the appropriate range for other IGMP variables, such as the Group Membership Interval (**ip igmp last-memb-query-interval**, page 4-232), as well as the Other Querier Present Interval, and the Startup Query Count (RFC 2236).

Example

```
Console(config-if)#ip igmp robustval 3  
Console(config-if)#
```

ip igmp query-interval

This command configures the frequency at which host query messages are sent. Use the **no** form to restore the default.

Syntax

ip igmp query-interval *seconds*
no ip igmp query-interval

seconds - The frequency at which the switch sends IGMP host-query messages. (Range: 1-255)

Default Setting

125 seconds

Command Mode

Interface Configuration (VLAN)

Command Usage

- Multicast routers send host query messages to determine the interfaces that are connected to downstream hosts requesting a specific multicast service. Only the designated multicast router for a subnet sends host query messages, which are addressed to the multicast address 224.0.0.1.
- For IGMP Version 1, the designated router is elected according to the multicast routing protocol that runs on the LAN. But for IGMP Version 2, the designated querier is the lowest IP-addressed multicast router on the subnet.

Example

The following shows how to configure the query interval to 100 seconds:

```
Console(config-if)#ip igmp query-interval 100
Console(config-if)#
```

ip igmp max-resp-interval

This command configures the maximum response time advertised in IGMP queries. Use the **no** form of this command to restore the default.

Syntax

```
ip igmp max-resp-interval seconds
no ip igmp max-resp-interval
```

seconds - The report delay advertised in IGMP queries. (Range: 1-255)

Default Setting

10 seconds

Command Mode

Interface Configuration (VLAN)

Command Usage

- The switch must be using IGMPv2 for this command to take effect.
- This command defines how long any responder (i.e., client or router) still in the group has to respond to a query message before the router deletes the group.
- By varying the Maximum Response Interval, you can tune the burstiness of IGMP messages passed on the subnet; where larger values make the traffic less bursty, as host responses are spread out over a larger interval.
- The number of seconds represented by the maximum response interval must be less than the Query Interval (page 4-230).

Example

The following shows how to configure the maximum response time to 20 seconds:

```
Console(config-if)#ip igmp max-resp-interval 20
Console(config-if)#
```

4 Command Line Interface

Related Commands

ip igmp version (4-232)
ip igmp query-interval (4-230)

ip igmp last-memb-query-interval

This command configures the last member query interval. Use the **no** form of this command to restore the default.

Syntax

ip igmp last-memb-query-interval *seconds*
no ip igmp last-memb-query-interval

seconds - The report delay for the last member query. (Range: 1-255)

Default Setting

1 second

Command Mode

Interface Configuration (VLAN)

Command Usage

- A multicast client sends an IGMP leave message when it leaves a group. The router then checks to see if this was the last host in the group by sending an IGMP query and starting a timer based on this command. If no reports are received before the timer expires, the group is deleted.
- This value may be tuned to modify the leave latency of the network. A reduced value results in reduced time to detect the loss of the last member of a group.

Example

The following shows how to configure the maximum response time to 10 seconds:

```
Console(config-if)#ip igmp last-memb-query-interval 10
Console(config-if)#
```

ip igmp version

This command configures the IGMP version used on an interface. Use the **no** form of this command to restore the default.

Syntax

ip igmp version {1 | 2}
no ip igmp version

- **1** - IGMP Version 1
- **2** - IGMP Version 2

Default Setting

IGMP Version 2

Command Mode

Interface Configuration (VLAN)

Command Usage

- All routers on the subnet must support the same version. However, the multicast hosts on the subnet may support either IGMP version 1 or 2.
- The switch must be set to version 2 to enable the **ip igmp max-resp-interval** (page 4-231).

Example

The following configures the switch to use IGMP Version 1 on the selected interface:

```
Console(config-if)#ip igmp version 1
Console(config-if)#
```

show ip igmp interface

This command shows the IGMP configuration for a specific VLAN interface or for all interfaces.

Syntax

show ip igmp interface [*vlan vlan-id*]

vlan-id - VLAN ID (Range: 1-4094)

Default Setting

None

Command Mode

Normal Exec, Privileged Exec

Example

The following example shows the IGMP configuration for VLAN 1, as well as the device currently serving as the IGMP querier for this multicast service.

```
Console#show ip igmp interface vlan 1
Vlan 1 is up
  IGMP is enable, version is 2
  Robustness variable is 2
  Query interval is 125 sec
  Query Max Response Time is 10 sec, Last Member Query Interval is 1 sec
  Querier is 10.1.0.253
Console#
```

4 Command Line Interface

clear ip igmp group

This command deletes entries from the IGMP cache.

Syntax

```
clear ip igmp group [group-address | interface vlan vlan-id]
```

- *group-address* - IP address of the multicast group.
- *vlan-id* - VLAN ID (Range: 1-4094)

Default Setting

Deletes all entries in the cache if no options are selected.

Command Mode

Privileged Exec

Command Usage

Enter the address for a multicast group to delete all entries for the specified group. Enter the interface option to delete all multicast groups for the specified interface. Enter no options to clear all multicast groups from the cache.

Example

The following example clears all multicast group entries for VLAN 1:

```
Console#clear ip igmp group interface vlan 1  
Console#
```

show ip igmp groups

This command displays information on multicast groups active on this switch.

Syntax

```
show ip igmp groups [group-address | interface vlan vlan-id]
```

- *group-address* - IP address of the multicast group.
- *vlan-id* - VLAN ID (Range: 1-4094)

Default Setting

Displays information for all known groups.

Command Mode

Normal Exec, Privileged Exec

Command Usage

- This command displays information for multicast groups learned via IGMP, not static groups.
- If the switch receives an IGMP Version 1 Membership Report, it sets a timer to note that there are Version 1 hosts present which are members of the group for which it heard the report.

- If there are Version 1 hosts present for a particular group, the switch will ignore any Leave Group messages that it receives for that group.

Example

The following shows the IGMP groups currently active on VLAN 1:

```

Console#show ip igmp groups vlan 1

  GroupAddress      InterfaceVlan  Lastreporter  Uptime  Expire  VlTimer
-----
      234.5.6.8           1       10.1.1.5.19   7068    220     0
Console#

```

Table 4-74 show ip igmp groups - display description

Field	Description
GroupAddress	IP multicast group address with subscribers directly attached or downstream from this switch.
InterfaceVlan	The interface on this switch that has received traffic directed to the multicast group address.
Lastreporter	The IP address of the source of the last membership report received for this multicast group address on this interface. If no membership report has been received, this object has the value 0.0.0.0.
Uptime	The time elapsed since this entry was created.
Expire	The time remaining before this entry will be aged out. (The default is 260 seconds.)
VlTimer	The time remaining until the switch assumes that there are no longer any IGMP Version 1 members on the IP subnet attached to this interface. (The default is 400 seconds.)

IP Interface Commands

There are no IP addresses assigned to this router by default. You must manually configure a new address to manage the router over your network or to connect the router to existing IP subnets. You may also need to establish a default gateway between this device and management stations or other devices that exist on another network segment (if routing is not enabled).

This section includes commands for configuring IP interfaces, the Address Resolution Protocol (ARP) and Proxy ARP. These commands are used to connect subnetworks to the enterprise network.

Table 4-75 IP Interface Commands

Command Group	Function	Page
Basic IP Configuration	Configures the IP address for interfaces and the gateway router	4-236
Address Resolution Protocol (ARP)	Configures static, dynamic and proxy ARP service	4-241

Basic IP Configuration

Table 4-76 Basic IP Configuration Commands

Command	Function	Mode	Page
ip address	Sets the IP address for the current interface	IC	4-236
ip default-gateway	Defines the default gateway through which this router can reach other subnetworks	GC	4-238
show ip interface	Displays the IP settings for this device	PE	4-238
show ip redirects	Displays the default gateway configured for this device	PE	4-239
ping	Sends ICMP echo request packets to another node on the network	NE, PE	4-239

ip address

This command sets the IP address for the currently selected VLAN interface. Use the **no** form to restore the default IP address.

Syntax

ip address {*ip-address netmask* | **bootp** | **dhcp**} [*secondary*]

no ip address

- *ip-address* - IP address
- *netmask* - Network mask for the associated IP subnet. This mask identifies the host address bits used for routing to specific subnets.
- **bootp** - Obtains IP address from BOOTP.
- **dhcp** - Obtains IP address from DHCP.
- *secondary* - Specifies a secondary IP address.

Default Setting

DHCP

Command Mode

Interface Configuration (VLAN)

Command Usage

- If this router is directly connected to end node devices (or connected to end nodes via shared media) that will be assigned to a specific subnet, then you must create a router interface for each VLAN that will support routing. The router interface consists of an IP address and subnet mask. This interface address defines both the network number to which the router interface is attached and the router's host number on that network. In other words, a router interface address defines the network and subnetwork numbers of the segment that is connected to that interface, and allows you to send IP packets to or from the router.
- Before you configure any network interfaces on this router, you should first create a VLAN for each unique user group, or for each network application and its associated users. Then assign the ports associated with each of these VLANs.
- You must assign an IP address to this device to gain management access over the network or to connect the router to existing IP subnets. You can manually configure a specific IP address, or direct the device to obtain an address from a BOOTP or DHCP server. Valid IP addresses consist of four numbers, 0 to 255, separated by periods. Anything outside this format will not be accepted by the configuration program.
- An interface can have only one primary IP address, but can have many secondary IP addresses. In other words, you will need to specify secondary addresses if more than one IP subnet can be accessed via this interface.
- If you select the **bootp** or **dhc** option, IP is enabled but will not function until a BOOTP or DHCP reply has been received. Requests will be broadcast periodically by this device in an effort to learn its IP address. (BOOTP and DHCP values can include the IP address, default gateway, and subnet mask).
- You can start broadcasting BOOTP or DHCP requests by entering an **ip dhcp restart client** command, or by rebooting the router.

- Notes:**
1. Each VLAN group can be assigned its own IP interface address. Therefore, if routing is enabled, you can manage the router via any of these IP addresses.
 2. Before you can change the primary IP address on an interface, you must first clear the current address with the no form of this command.

Example

In the following example, the device is assigned an address in VLAN 1.

```
Console(config)#interface vlan 1
Console(config-if)#ip address 192.168.1.5 255.255.255.0
Console(config-if)#
```

4 Command Line Interface

Related Commands

ip dhcp restart client (4-127)

ip default-gateway

This command specifies the default gateway for destinations not found in the local routing tables. Use the **no** form to remove a default gateway.

Syntax

ip default-gateway *gateway*

no ip default-gateway

gateway - IP address of the default gateway

Default Setting

No static route is established.

Command Mode

Global Configuration

Command Usage

- The gateway specified in this command is only valid if routing is disabled with the **no ip routing** command. If IP routing is disabled, you must define a gateway if the target device is located in a different subnet.
- If routing is enabled, you must define the gateway with the **ip route** command.

Example

The following example defines a default gateway for this device:

```
Console(config)#ip default-gateway 10.1.1.254
Console(config)#
```

Related Commands

show ip redirects (4-239)

ip routing (4-244)

ip route (4-245)

show ip interface

This command displays the settings of an IP interface.

Command Mode

Privileged Exec

Example

```
Console#show ip interface
Vlan 1 is up, addressing mode is User
  Interface address is 10.1.0.254, mask is 255.255.255.0, Primary
  MTU is 1500 bytes
  Proxy ARP is disabled
  Split horizon is enabled
Console#
```

Related Commands

show ip redirects (4-239)

show ip redirects

This command shows the default gateway configured for this device.

Default Setting

None

Command Mode

Privileged Exec

Example

```
Console#show ip redirects
ip default gateway 10.1.0.254
Console#
```

Related Commands

ip default-gateway (4-238)

ping

This command sends ICMP echo request packets to another node on the network.

Syntax

ping *host* [**count** *count*][**size** *size*]

- *host* - IP address or IP alias of the host.
- *count* - Number of packets to send. (Range: 1-16, default: 5)
- *size* - Number of bytes in a packet. (Range: 32-512, default: 32)
The actual packet size will be eight bytes larger than the size specified because the router adds header information.

Default Setting

This command has no default for the host.

Command Mode

Normal Exec, Privileged Exec

4 Command Line Interface

Command Usage

- Use the ping command to see if another site on the network can be reached.
- The following are some results of the **ping** command:
 - *Normal response* - The normal response occurs in one to ten seconds, depending on network traffic.
 - *Destination does not respond* - If the host does not respond, a “timeout” appears in ten seconds.
 - *Destination unreachable* - The gateway for this destination indicates that the destination is unreachable.
 - *Network or host unreachable* - The gateway found no corresponding entry in the route table.
- Press <Esc> to stop ping.

Example

```
Console#ping 10.1.0.9
Type ESC to abort.
PING to 10.1.0.9, by 5 32-byte payload ICMP packets, timeout is 5 seconds
response time: 10 ms
response time: 10 ms
response time: 10 ms
response time: 10 ms
response time: 0 ms
Ping statistics for 10.1.0.9:
    5 packets transmitted, 5 packets received (100%), 0 packets lost (0%)
Approximate round trip times:
    Minimum = 0 ms, Maximum = 10 ms, Average = 8 ms
Console#
```

Related Commands

interface (4-149)

Address Resolution Protocol (ARP)

Table 4-77 Address Resolution Protocol Commands

Command	Function	Mode	Page
arp	Adds a static entry in the ARP cache	GC	4-241
arp-timeout	Sets the time a dynamic entry remains in the ARP cache	GC	4-242
clear arp-cache	Deletes all dynamic entries from the ARP cache	PE	4-242
show arp	Displays entries in the ARP cache	NE, PE	4-242
ip proxy-arp	Enables proxy ARP service	VC	4-243

arp

This command adds a static entry in the Address Resolution Protocol (ARP) cache. Use the **no** form to remove an entry from the cache.

Syntax

arp *ip-address hardware-address*
no arp *ip-address*

- *ip-address* - IP address to map to a specified hardware address.
- *hardware-address* - Hardware address to map to a specified IP address.
 (The format for this address is xx-xx-xx-xx-xx-xx.)

Default Setting

No default entries

Command Mode

Global Configuration

Command Usage

- The ARP cache is used to map 32-bit IP addresses into 48-bit hardware (i.e., Media Access Control) addresses. This cache includes entries for hosts and other routers on local network interfaces defined on this router.
- The maximum number of static entries allowed in the ARP cache is 128.
- You may need to enter a static entry in the cache if there is no response to an ARP broadcast message. For example, some applications may not respond to ARP requests or the response arrives too late, causing network operations to time out.

Example

```
Console(config)#arp 10.1.0.19 01-02-03-04-05-06
Console(config)#
```

Related Commands

clear arp-cache
 show arp

4 Command Line Interface

arp-timeout

This command sets the aging time for dynamic entries in the Address Resolution Protocol (ARP) cache. Use the **no** form to restore the default.

Syntax

arp-timeout *seconds*

no arp-timeout

seconds - The time a dynamic entry remains in the ARP cache.
(Range: 300-86400; 86400 is one day)

Default Setting

1200 seconds (20 minutes)

Command Mode

Global Configuration

Command Usage

Use the **show arp** command to display the current cache timeout value.

Example

This example sets the ARP cache timeout for 15 minutes (i.e., 900 seconds).

```
Console(config)#arp-timeout 900
Console(config)#
```

clear arp-cache

This command deletes all dynamic entries from the Address Resolution Protocol (ARP) cache.

Command Mode

Privileged Exec

Example

This example clears all dynamic entries in the ARP cache.

```
Console#clear arp-cache
This operation will delete all the dynamic entries in ARP Cache.
Are you sure to continue this operation (y/n)?y
Console#
```

show arp

Use this command to display entries in the Address Resolution Protocol (ARP) cache.

Command Mode

Normal Exec, Privileged Exec

Command Usage

This command displays information about the ARP cache. The first line shows the cache timeout. It also shows each cache entry, including the corresponding IP address, MAC address, type (static, dynamic, other), and VLAN interface. Note that entry type “other” indicates local addresses for this router.

Example

This example displays all entries in the ARP cache.

```

Console#show arp
Arp cache timeout: 1200 (seconds)

  IP Address      MAC Address      Type      Interface
-----
  10.1.0.0        ff-ff-ff-ff-ff-ff  other     1
  10.1.0.254      00-00-ab-cd-00-00  other     1
  10.1.0.255      ff-ff-ff-ff-ff-ff  other     1
  123.20.10.123   02-10-20-30-40-50  static    2
  345.30.20.23    09-50-40-30-20-10  dynamic   3

Total entry : 5
Console#

```

ip proxy-arp

This command enables proxy Address Resolution Protocol (ARP). Use the **no** form to disable proxy ARP.

Syntax

[no] ip proxy-arp

Default Setting

Disabled

Command Mode

Interface Configuration (VLAN)

Command Usage

Proxy ARP allows a non-routing device to determine the MAC address of a host on another subnet or network.

Example

```

Console(config)#interface vlan 3
Console(config-if)#ip proxy-arp
Console(config-if)#

```

IP Routing Commands

After you configure network interfaces for this router, you must set the paths used to send traffic between different interfaces. If you enable routing on this device, traffic will automatically be forwarded between all of the local subnetworks. However, to forward traffic to devices on other subnetworks, you can either configure fixed paths with static routing commands, or enable a dynamic routing protocol that exchanges information with other routers on the network to automatically determine the best path to any subnetwork.

This section includes commands for both static and dynamic routing. These commands are used to connect between different local subnetworks or to connect the router to the enterprise network.

Table 4-78 IP Routing Commands

Command Group	Function	Page
Global Routing Configuration	Configures global parameters for static and dynamic routing, displays the routing table, and statistics for protocols used to exchange routing information	4-244
Routing Information Protocol (RIP)	Configures global and interface specific parameters for RIP	4-248
Open Shortest Path First (OSPF)	Configures global and interface specific parameters for OSPF	4-259

Global Routing Configuration

Table 4-79 Global Routing Configuration Commands

Command	Function	Mode	Page
ip routing	Enables static and dynamic IP routing	GC	4-244
ip route	Configures static routes	GC	4-245
clear ip route	Deletes specified entries from the routing table	PE	4-246
show ip route	Displays specified entries in the routing table	PE	4-246
show ip host-route	Displays displays the interface associated with known routes	PE	4-247
show ip traffic	Displays statistics for IP, ICMP, UDP, TCP and ARP protocols	PE	4-248

ip routing

This command enables IP routing. Use the **no** form to disable IP routing.

Syntax

[no] ip routing

Default Setting

Enabled

Command Mode

Global Configuration

Command Usage

- The command affects both static and dynamic unicast routing.
- If IP routing is enabled, all IP packets are routed using either static routing or dynamic routing via RIP or OSPF, and other packets for all non-IP protocols (e.g., NetBuei, NetWare or AppleTalk) are switched based on MAC addresses. If IP routing is disabled, all packets are switched, with filtering and forwarding decisions based strictly on MAC addresses.

Example

```
Console(config)#ip routing
Console(config)#
```

ip route

This command configures static routes. Use the **no** form to remove static routes.

Syntax

ip route {*destination-ip netmask* | **default**} {*gateway*} [**metric** *metric*]
no ip route {*destination-ip netmask* | **default** | *}

- *destination-ip* – IP address of the destination network, subnetwork, or host.
- *netmask* - Network mask for the associated IP subnet. This mask identifies the host address bits used for routing to specific subnets.
- **default** – Sets this entry as the default route.
- *gateway* – IP address of the gateway used for this route.
- *metric* – Selected RIP cost for this interface. (Range: 1-5, default: 1)
- * – Removes all static routing table entries.

Default Setting

No static routes are configured.

Command Mode

Global Configuration

Command Usage

- You can configure up to 2000 static routes.
- Static routes take precedence over dynamically learned routes.
- Static routes are included in RIP updates periodically sent by the router.

Example

This example forwards all traffic for subnet 192.168.1.0 to the router 192.168.5.254, using the default metric of 1.

```
Console(config)#ip route 192.168.1.0 255.255.255.0 192.168.5.254
Console(config)#
```

4 Command Line Interface

clear ip route

This command removes dynamically learned entries from the IP routing table.

Syntax

clear ip route {*network* [*netmask*] | *}

- *network* – Network or subnet address.
- *netmask* - Network mask for the associated IP subnet. This mask identifies the host address bits used for routing to specific subnets.
- * – Removes all dynamic routing table entries.

Command Mode

Privileged Exec

Command Usage

- This command only clears dynamically learned routes.
- Use the **no ip address** command to remove a local interface.
- Use the **no ip route** command to remove a static route.

Example

```
Console#clear ip route 10.1.5.0
Console#
```

show ip route

This command displays information in the IP routing table.

Syntax

show ip route [**config** | *address* [*netmask*]]

- **config** – Displays all static routing entries.
- *address* – IP address of the destination network, subnetwork or host for which routing information is to be displayed.
- *netmask* - Network mask for the associated IP subnet. This mask identifies the host address bits used for routing to specific subnets.

Command Mode

Privileged Exec

Command Usage

If the *address* is specified without the *netmask* parameter, the router displays all routes for the corresponding natural class address (page 4-250).

Example

```

Console#show ip route

  Ip Address          Netmask          Next Hop          Protocol  Metric Interface
-----
      0.0.0.0          0.0.0.0          10.2.48.102      static    0         1
    10.2.48.2      255.255.252.0    10.2.48.16       local     0         1
    10.2.5.6       255.255.255.0    10.2.8.12        RIP       1         2
    10.3.9.1       255.255.255.0    10.2.9.254      OSPF-intra 2         3

Total entry: 4
Console#

```

Table 4-80 show ip route - display description

Field	Description
Ip Address	IP address of the destination network, subnetwork, or host. Note that the address 0.0.0.0 indicates the default gateway for this router.
Netmask	Network mask for the associated IP subnet.
Next Hop	IP address of the next hop (or gateway) used for this route.
Protocol	The protocol which generated this route information. (Values: static, local, RIP, OSPF)
Metric	Cost for this interface.
Interface	VLAN interface through which this address can be reached.

show ip host-route

This command displays the interface associated with known routes.

Command Mode

Privileged Exec

Example

```

Console#show ip host-route
Total count: 0
  IP address          Mac address          VLAN    Port
-----
    192.168.1.250      00-00-30-01-01-01    3       1
    10.2.48.2          00-00-30-01-01-02    1       1
    10.2.5.6           00-00-30-01-01-03    1       2
    10.3.9.1           00-00-30-01-01-04    2       3

Console#

```

Table 4-81 show ip host-route - display description

Field	Description
Ip address	IP address of the destination network, subnetwork, or host.
Mac address	The physical layer address associated with the IP address.
VLAN	The VLAN that connects to this IP address.
Port	The port that connects to this IP address.

4 Command Line Interface

show ip traffic

This command displays statistics for IP, ICMP, UDP, TCP and ARP protocols.

Command Mode

Privileged Exec

Command Usage

For a description of the information shown by this command, see “Displaying Statistics for IP Protocols” on page 3-194.

Example

```
Console#show ip traffic
IP statistics:
  Rcvd:  5 total, 5 local destination
         0 checksum errors
         0 unknown protocol, 0 not a gateway
  Frags: 0 reassembled, 0 timeouts
         0 fragmented, 0 couldn't fragment
  Sent:  9 generated
         0 no route
ICMP statistics:
  Rcvd:  0 checksum errors, 0 redirects, 0 unreachable, 0 echo
         5 echo reply, 0 mask requests, 0 mask replies, 0 quench
         0 parameter, 0 timestamp
  Sent:  0 redirects, 0 unreachable, 0 echo, 0 echo reply
         0 mask requests, 0 mask replies, 0 quench, 0 timestamp
         0 time exceeded, 0 parameter problem
UDP statistics:
  Rcvd:  0 total, 0 checksum errors, 0 no port
  Sent:  0 total
TCP statistics:
  Rcvd:  0 total, 0 checksum errors
  Sent:  0 total
ARP statistics:
  Rcvd:  0 requests, 1 replies
  Sent:  1 requests, 0 replies
Console#
```

Routing Information Protocol (RIP)

Table 4-82 Routing Information Protocol Commands

Command	Function	Mode	Page
router rip	Enables the RIP routing protocol	GC	4-249
timers basic	Sets basic timers, including update, timeout, garbage collection	RC	4-249
network	Specifies the network interfaces that are to use RIP routing	RC	4-250
neighbor	Defines a neighboring router with which to exchange information	RC	4-251
version	Specifies the RIP version to use on all network interfaces (if not already specified with a receive version or send version command)	RC	4-252
ip rip receive version	Sets the RIP receive version to use on a network interface	IC	4-253
ip rip send version	Sets the RIP send version to use on a network interface	IC	4-254
ip split-horizon	Enables split-horizon or poison-reverse loop prevention	IC	4-255

Table 4-82 Routing Information Protocol Commands

Command	Function	Mode	Page
ip rip authentication key	Enables authentication for RIP2 packets and specifies keys	IC	4-255
ip rip authentication mode	Specifies the type of authentication used for RIP2 packets	IC	4-256
show rip globals	Displays global configuration settings and statistics for RIP	PE	4-257
show ip rip	Displays RIP configuration information for each network interface	PE	4-257

router rip

This command enables Routing Information Protocol (RIP) routing for all IP interfaces on the router. Use the **no** form to disable it.

Syntax

[no] router rip

Command Mode

Global Configuration

Default Setting

Disabled

Command Usage

- RIP is used to specify how routers exchange routing table information.
- This command is also used to enter router configuration mode.

Example

```
Console(config)#router rip
Console(config-router)#
```

Related Commands

network (4-250)

timers basic

This command configures the RIP update timer, timeout timer, and garbage-collection timer. Use the **no** form to restore the defaults.

Syntax

timers basic *update-seconds*
no timers basic

update-seconds – Sets the update timer to the specified value, sets the timeout time value to 6 times the update time, and sets the garbage-collection timer to 4 times the update time.
 (Range for update timer: 15-60 seconds)

Command Mode

Router Configuration

4 Command Line Interface

Default Setting

Update: 30 seconds

Timeout: 180 seconds

Garbage collection: 120 seconds

Command Usage

- The *update* timer sets the rate at which updates are sent. This is the fundamental timer used to control all basic RIP processes.
- The *timeout* timer is the time after which there have been no update messages that a route is declared dead. The route is marked inaccessible (i.e., the metric set to infinite) and advertised as unreachable. However, packets are still forwarded on this route.
- After the *timeout* interval expires, the router waits for an interval specified by the *garbage-collection* timer before removing this entry from the routing table. This timer allows neighbors to become aware of an invalid route prior to purging it.
- Setting the update timer to a short interval can cause the router to spend an excessive amount of time processing updates.
- These timers must be set to the same values for all routers in the network.

Example

This example sets the update timer to 40 seconds. The timeout timer is subsequently set to 240 seconds, and the garbage-collection timer to 160 seconds.

```
Console(config-router)#timers basic 15
Console(config-router)#
```

network

This command specifies the network interfaces that will be included in the RIP routing process. Use the **no** form to remove an entry.

Syntax

[no] network *subnet-address*

subnet-address – IP address of a network directly connected to this router.

Command Mode

Router Configuration

Default Setting

No networks are specified.

Command Usage

- RIP only sends updates to interfaces specified by this command.
- Subnet addresses are interpreted as class A, B or C, based on the first field in the specified address. In other words, if a subnet address nnn.xxx.xxx.xxx is entered, the first field (nnn) determines the class:
 - 0 - 127 is class A, and only the first field in the network address is used.
 - 128 - 191 is class B, and the first two fields in the network address are used.
 - 192 - 223 is class C, and the first three fields in the network address are used.

Example

This example includes network interface 10.1.0.0 in the RIP routing process.

```
Console(config-router)#network 10.1.0.0
Console(config-router)#
```

Related Commands

router rip (4-249)

neighbor

This command defines a neighboring router with which this router will exchange routing information. Use the **no** form to remove an entry.

Syntax

[no] neighbor *ip-address*

ip-address - IP address to map to a specified hardware address.

Command Mode

Router Configuration

Default Setting

No neighbors are defined.

Command Usage

This command can be used to configure a static neighbor with which this router will exchange information, rather than relying on broadcast messages generated by the RIP protocol.

Example

```
Console(config-router)#neighbor 10.2.0.254
Console(config-router)#
```

4 Command Line Interface

version

This command specifies a RIP version used globally by the router. Use the **no** form to restore the default value.

Syntax

version {1 | 2}

no version

- 1 - RIP Version 1
- 2 - RIP Version 2

Command Mode

Router Configuration

Default Setting

RIP Version 1

Command Usage

- When this command is used to specify a global RIP version, any VLAN interface not previously set by the **ip rip receive version** or **ip rip send version** command will be set to the following values:
 - RIP Version 1 configures the unset interfaces to send RIPv1 compatible protocol messages and receive either RIPv1 or RIPv2 protocol messages.
 - RIP Version 2 configures the unset interfaces to use RIPv2 for both sending and receiving protocol messages.
- When the **no** form of this command is used to restore the default value, any VLAN interface not previously set by the **ip rip receive version** or **ip rip send version** command will be set to the default send or receive version.

Example

This example sets the global version for RIP to send and receive version 2 packets.

```
Console(config-router)#version 2
Console(config-router)#
```

Related Commands

ip rip receive version (4-253)

ip rip send version (4-254)

ip rip receive version

This command specifies a RIP version to receive on an interface. Use the **no** form to restore the default value.

Syntax

ip rip receive version {none | 1 | 2 | 1 2}

no ip rip receive version

- **none** - Does not accept incoming RIP packets.
- **1** - Accepts only RIPv1 packets.
- **2** - Accepts only RIPv2 packets.
- **1 2** - Accepts RIPv1 or RIPv2 packets

Command Mode

Interface Configuration (VLAN)

Default Setting

The default depends on the setting specified with the **version** command:

Global RIPv1 - RIPv1 or RIPv2 packets

Global RIPv2 - RIPv2 packets

Command Usage

- Use this command to override the global setting specified by the RIP **version** command.
- You can specify the receive version based on these options:
 - Use “none” if you do not want to add any dynamic entries to the routing table for an interface. (For example, you may only want to allow static routes for a specific interface.)
 - Use “1” or “2” if all routers in the local network are based on RIPv1 or RIPv2, respectively.
 - Use “1 2” if some routers in the local network are using RIPv2, but there are still some older routers using RIPv1.

Example

This example sets the interface version for VLAN 1 to receive RIPv1 packets.

```
Console(config)#interface vlan 1
Console(config-if)#ip rip receive version 1
Console(config-if)#
```

Related Commands

version (4-252)

4 Command Line Interface

ip rip send version

This command specifies a RIP version to send on an interface. Use the **no** form to restore the default value.

Syntax

ip rip send version {none | 1 | 2 | v2-broadcast}

no ip rip send version

- **none** - Does not transmit RIP updates.
- **1** - Sends only RIPv1 packets.
- **2** - Sends only RIPv2 packets.
- **v2-broadcast** - Route information is broadcast to other routers with RIPv2.

Command Mode

Interface Configuration (VLAN)

Default Setting

The default depends on the setting specified with the **version** command:

Global RIPv1 - Route information is broadcast to other routers with RIPv2

Global RIPv2 - RIPv2 packets

Command Usage

- Use this command to override the global setting specified by the RIP **version** command.
- You can specify the receive version based on these options:
 - Use "none" to passively monitor route information advertised by other routers attached to the network.
 - Use "1" or "2" if all routers in the local network are based on RIPv1 or RIPv2, respectively.
 - Use "v2-broadcast" to propagate route information by broadcasting to other routers on the network using RIPv2, instead of multicasting as normally required by RIPv2. (Using this mode allows RIPv1 routers to receive these protocol messages, but still allows RIPv2 routers to receive the additional information provided by RIPv2, including subnet mask, next hop and authentication information.)

Example

This example sets the interface version for VLAN 1 to send RIPv1 packets.

```
Console(config)#interface vlan 1
Console(config-if)#ip rip send version 1
Console(config-if)#
```

Related Commands

version (4-252)

ip split-horizon

This command enables split-horizon or poison-reverse (a variation) on an interface. Use the **no** form to disable split-horizon.

Syntax

```
ip split-horizon [poison-reverse]
no ip split-horizon
```

poison-reverse - Enables poison-reverse on the current interface.

Command Mode

Interface Configuration (VLAN)

Default Setting

split-horizon

Command Usage

- Split horizon never propagates routes back to an interface from which they have been acquired.
- Poison reverse propagates routes back to an interface port from which they have been acquired, but sets the distance-vector metrics to infinity. (This provides faster convergence.)

Example

This example propagates routes back to the source using poison-reverse.

```
Console(config)#interface vlan 1
Console(config-if)#ip split-horizon poison-reverse
Console(config-if)#
```

ip rip authentication key

This command enables authentication for RIPv2 packets and to specify the key that must be used on an interface. Use the **no** form to prevent authentication.

Syntax

```
ip rip authentication key key-string
no ip rip authentication
```

key-string - A password used for authentication.
(Range: 1-16 characters, case sensitive)

Command Mode

Interface Configuration (VLAN)

Default Setting

No authentication

Command Usage

- This command can be used to restrict the interfaces that can exchange RIPv2 routing information. (Note that this command does not apply to RIPv1.)

4 Command Line Interface

- For authentication to function properly, both the sending and receiving interface must be configured with the same password.

Example

This example sets an authentication password of "small" to verify incoming routing messages and to tag outgoing routing messages.

```
Console(config)#interface vlan 1
Console(config-if)#ip rip authentication key small
Console(config-if)#
```

Related Commands

ip rip authentication mode (4-256)

ip rip authentication mode

This command specifies the type of authentication that can be used on an interface. Note that the current firmware version only supports a simple password. Use the **no** form to restore the default value.

Syntax

ip rip authentication mode {text}
no ip rip authentication mode

text - Indicates that a simple password will be used.

Command Mode

Interface Configuration (VLAN)

Default Setting

No authentication

Command Usage

- The password to be used for authentication is specified in the **ip rip authentication key** command (page 4-255).
- This command requires the interface to exchange routing information with other routers based on an authorized password. (Note that this command only applies to RIPv2.)
- For authentication to function properly, both the sending and receiving interface must be configured with the same password or authentication key.

Example

This example sets the authentication mode to plain text.

```
Console(config)#interface vlan 1
Console(config-if)#ip rip authentication mode text
Console(config-if)#
```

Related Commands

ip rip authentication key (4-255)

show rip globals

This command displays global configuration settings for RIP.

Command Mode

Privileged Exec

Example

```
Console#show rip globals

RIP Process: Enabled
Update Time in Seconds: 30
Number of Route Change: 0
Number of Queries: 1
Console#
```

Table 4-83 show rip globals - display description

Field	Description
RIP Process	Indicates if RIP has been enabled or disabled.
Update Time in Seconds	The interval at which RIP advertises known route information. (Default: 30 seconds)
Number of Route Changes	Number of times routing information has changed.
Number of Queries	Number of router database queries received by this router.

show ip rip

This command displays information about interfaces configured for RIP.

Syntax

show ip rip {configuration | status | peer}

- **configuration** - Shows RIP configuration settings for each interface.
- **status** - Shows the status of routing messages on each interface.
- **peer** - Shows information on neighboring routers, along with information about the last time a route update was received, the RIP version used by the neighbor, and the status of routing messages received from this neighbor.

Command Mode

Privileged Exec

4 Command Line Interface

Example

```

Console#show ip rip configuration

  Interface      SendMode      ReceiveMode    Poison          Authentication
  -----
  10.1.0.253     rip1Compatible  RIPv1Orv2     SplitHorizon    noAuthentication
  10.1.1.253     rip1Compatible  RIPv1Orv2     SplitHorizon    noAuthentication
Console#show ip rip status

  Interface      RcvBadPackets  RcvBadRoutes    SendUpdates
  -----
  10.1.0.253     0              0                13
  10.1.1.253     0              0                13
Console#show ip rip peer

  Peer          UpdateTime    Version    RcvBadPackets  RcvBadRoutes
  -----
  10.1.0.254    1625         2          0              0
  10.1.1.254    1625         2          0              0
Console#

```

Table 4-84 show ip rip - display description

Field	Description
<i>show ip rip configuration</i>	
Interface	IP address of the interface.
SendMode	RIP version sent on this interface (none, RIPv1, RIPv2, or RIPv2-broadcast)
ReceiveMode	RIP version received on this interface (none, RIPv1, RIPv2, RIPv1 or RIPv2)
Poison	Shows if split-horizon, poison-reverse, or no protocol message loopback prevention method is in use.
Authentication	Shows if authentication is set to simple password or none.
<i>show ip rip status</i>	
Interface	IP address of the interface.
RcvBadPackets	Number of bad RIP packets received.
RcvBadRoutes	Number of bad routes received.
SendUpdates	Number of route changes.
<i>show ip rip peer</i>	
Peer	IP address of a neighboring RIP router.
UpdateTime	Last time a route update was received from this peer.
Version	Whether RIPv1 or RIPv2 packets were received from this peer.
RcvBadPackets	Number of bad RIP packets received from this peer.
RcvBadRoutes	Number of bad routes received from this peer.

Open Shortest Path First (OSPF)

Table 4-85 Open Shortest Path First Commands

Command	Function	Mode	Page
<i>General Configuration</i>			
router ospf	Enables or disables OSPF	GC	4-260
router-id	Sets the router ID for this device	RC	4-260
compatible rfc1583	Calculates summary route costs using RFC 1583 (OSPFv1)	RC	4-261
default-information originate	Generates a default external route into an autonomous system	RC	4-262
timers spf	Configures the hold time between consecutive SPF calculations	RC	4-263
<i>Route Metrics and Summaries</i>			
area range	Summarizes routes advertised by an ABR	RC	4-264
area default-cost	Sets the cost for a default summary route sent into a stub or NSSA	RC	4-264
summary-address	Summarizes routes advertised by an ASBR	RC	4-265
redistribute	Redistribute routes from one routing domain to another	RC	4-266
<i>Area Configuration</i>			
network area	Assigns specified interface to an area	RC	4-267
area stub	Defines a stubby area that cannot send or receive LSAs	RC	4-268
area nssa	Defines a not-so-stubby that can import external routes	RC	4-269
area virtual-link	Defines a virtual link from an area border routers to the backbone	RC	4-270
<i>Interface Configuration</i>			
ip ospf authentication	Specifies the authentication type for an interface	IC	4-272
ip ospf authentication-key	Assigns a simple password to be used by neighboring routers	IC	4-273
ip ospf message-digest-key	Enables MD5 authentication and sets the key for an interface	IC	4-274
ip ospf cost	Specifies the cost of sending a packet on an interface	IC	4-275
ip ospf dead-interval	Sets the interval at which hello packets are not seen before neighbors declare the router down	IC	4-275
ip ospf hello-interval	Specifies the interval between sending hello packets	IC	4-276
ip ospf priority	Sets the router priority used to determine the designated router	IC	4-276
ip ospf retransmit-interval	Specifies the time between resending a link-state advertisement	IC	4-277
ip ospf transmit-delay	Estimates time to send a link-state update packet over an interface	IC	4-278
<i>Display Information</i>			
show ip ospf	Displays general information about the routing processes	PE	4-278
show ip ospf border-routers	Displays routing table entries for Area Border Routers (ABR) and Autonomous System Boundary Routers (ASBR)	PE	4-279
show ip ospf database	Shows information about different LSAs in the database	PE	4-280
show ip ospf interface	Displays interface information	PE	4-288
show ip ospf neighbor	Displays neighbor information	PE	4-289

Table 4-85 Open Shortest Path First Commands (Continued)

Command	Function	Mode	Page
show ip ospf summary-address	Displays all summary address redistribution information	PE	4-290
show ip ospf virtual-links	Displays parameters and the adjacency state of virtual links	PE	4-290

router ospf

This command enables Open Shortest Path First (OSPF) routing for all IP interfaces on the router. Use the **no** form to disable it.

Syntax

[no] router ospf

Command Mode

Global Configuration

Default Setting

Disabled

Command Usage

- OSPF is used to specify how routers exchange routing table information.
- This command is also used to enter router configuration mode.

Example

```
Console(config)#router ospf
Console(config-router)#
```

Related Commands

network area (4-267)

router-id

This command assigns a unique router ID for this device within the autonomous system. Use the **no** form to use the default router identification method (i.e., the lowest interface address).

Syntax

router-id *ip-address*
no router-id

ip-address - Router ID formatted as an IP address.

Command Mode

Router Configuration

Default Setting

Lowest interface address

Command Usage

- The router ID must be unique for every router in the autonomous system. Using the default setting based on the lowest interface address ensures that each router ID is unique. Also, note that you cannot set the router ID to 0.0.0.0 or 255.255.255.255.
- If this router already has registered neighbors, the new router ID will be used when the router is rebooted, or manually restarted by entering the **no router ospf** followed by the **router ospf** command.
- If the priority values of the routers bidding to be the designated router or backup designated router for an area are equal, the router with the highest ID is elected.

Example

```
Console(config-router)#router-id 10.1.1.1
Console(config-router)#
```

Related Commands

router ospf (4-260)

compatible rfc1583

This command calculates summary route costs using RFC 1583 (OSPFv1). Use the **no** form to calculate costs using RFC 2328 (OSPFv2).

Syntax

[no] **compatible rfc1583**

Command Mode

Router Configuration

Default Setting

RFC 1583 compatible

Command Usage

All routers in an OSPF routing domain should use the same RFC for calculating summary routes.

Example

```
Console(config-router)#compatible rfc1583
Console(config-router)#
```

default-information originate

This command generates a default external route into an autonomous system. Use the **no** form to disable this feature.

Syntax

```
default-information originate [always] [metric interface-metric]  
[metric-type metric-type]  
no default-information originate
```

- **always** - Always advertise a default route to the local AS regardless of whether the router has a default route. (See “ip route” on page 4-245.)
- *interface-metric* - Metric assigned to the default route. (Range: 1-65535; Default: 10)
- *metric-type* - External link type used to advertise the default route. (Options: Type 1, Type 2; Default: Type 2)

Command Mode

Router Configuration

Default Setting

Disabled

Command Usage

- The metric for the default external route is used to calculate the path cost for traffic passed from other routers within the AS out through the ASBR.
- When you use this command to redistribute routes into a routing domain (i.e., an Autonomous System, this router automatically becomes an Autonomous System Boundary Router (ASBR). However, an ASBR does not, by default, generate a default route into the routing domain.
 - If you use the **always** keyword, the router will advertise itself as a default external route into the AS, even if a default external route does not actually exist. (To define a default route, use the **ip route** command.)
 - If you do *not* use the **always** keyword, the router can only advertise a default external route into the AS if the **redistribute** command is used to import external routes via RIP or static routing, and such a route is known.
- Type 1 route advertisements add the internal cost to the external route metric. Type 2 routes do not add the internal cost metric. When comparing Type 2 routes, the internal cost is only used as a tie-breaker if several Type 2 routes have the same cost.

Example

This example assigns a metric of 20 to the default external route advertised into an autonomous system, sending it as a Type 2 external metric.

```
Console(config-router)#default-information originate metric 20  
metric-type 2  
Console(config-router)#
```

Related Commands

ip route (4-245)
redistribute (4-266)

timers spf

This command configures the hold time between making two consecutive shortest path first (SPF) calculations. Use the **no** form to restore the default value.

Syntax

timers spf *spf-holdtime*
no timers spf

spf-holdtime - Minimum time between two consecutive SPF calculations.
(Range: 0-65535 seconds)

Command Mode

Router Configuration

Default Setting

10 seconds

Command Usage

- Setting the SPF holdtime to 0 means that there is no delay between consecutive calculations.
- Using a low value allows the router to switch to a new path faster, but uses more CPU processing time.

Example

```
Console(config-router)#timers spf 20  
Console(config-router)#
```

4 Command Line Interface

area range

This command summarizes the routes advertised by an Area Border Router (ABR). Use the **no** form to disable this function.

Syntax

[no] area *area-id* range *ip-address netmask* [advertise | not-advertise]

- *area-id* - Identifies an area for which the routes are summarized. (The area ID must be in the form of an IP address.)
- *ip-address* - Base address for the routes to summarize.
- *netmask* - Network mask for the summary route.
- **advertise** - Advertises the specified address range.
- **not-advertise** - The summary is not sent, and the routes remain hidden from the rest of the network.

Command Mode

Router Configuration

Default Setting

Disabled

Command Usage

- This command can be used to advertise routes between areas.
- If routes are set to be advertised, the router will issue a Type 3 summary LSA for each address range specified with this command.
- This router supports up to 64 summary routes for area ranges.

Example

This example creates a summary address for all area routes in the range of 10.2.x.x.

```
Console(config-router)#area 10.2.0.0 range 10.2.0.0 255.255.0.0 advertise
Console(config-router)#
```

area default-cost

This command specifies a cost for the default summary route sent into a stub or not-so-stubby area (NSSA) from an Area Border Router (ABR). Use the **no** form to remove the assigned default cost.

Syntax

area *area-id* default-cost *cost*

no area *area-id* default-cost

- *area-id* - Identifier for a stub or NSSA, in the form of an IP address.
- *cost* - Cost for the default summary route sent to a stub or NSSA. (Range: 0-65535)

Command Mode

Router Configuration

Default Setting

1

Command Usage

- If you enter this command for a normal area, it will be changed to a stub.
- If the default cost is set to "0," the router will not advertise a default route into the attached stub or NSSA.

Example

```
Console(config-router)#area 10.3.9.0 default-cost 10
Console(config-router)#
```

Related Commands

area stub (4-268)

summary-address

This command aggregates routes learned from other protocols. Use the **no** form to remove a summary address.

Syntax

[no] summary-address *summary-address netmask*

- *summary-address* - Summary address covering a range of addresses.
- *netmask* - Network mask for the summary route.

Command Mode

Router Configuration

Default Setting

Disabled

Command Usage

- An Autonomous System Boundary Router (ASBR) can redistribute routes learned from other protocols by advertising an aggregate route into all attached autonomous systems.
- This router supports up to 16 Type-5 summary routes.

Example

This example creates a summary address for all routes contained in 192.168.x.x.

```
Console(config-router)#summary-address 192.168.0.0 255.255.0.0
Console(config-router)#
```

Related Commands

area range (4-264)

redistribute

This command imports external routing information from other routing domains (i.e., protocols) into the autonomous system. Use the **no** form to disable this feature.

Syntax

[no] redistribute [rip | static] [metric *metric-value*] [metric-type *type-value*]

- **rip** - External routes will be imported from the Routing Information Protocol into this Autonomous System.
- **static** - Static routes will be imported into this Autonomous System.
- ***metric-value*** - Metric assigned to all external routes for the specified protocol. (Range: 1-65535; Default: 10)
- ***type-value***
 - **1** - Type 1 external route
 - **2** - Type 2 external route (default) - Routers do not add internal route metric to external route metric.

Command Mode

Router Configuration

Default Setting

redistribution - none
protocol - RIP and static
metric-value - 0
type-metric - 2

Command Usage

- This router supports redistribution for both RIP and static routes.
- When you redistribute external routes into an OSPF autonomous system (AS), the router automatically becomes an autonomous system boundary router (ASBR). If the **redistribute** command is used in conjunction with the **default-information originate** command to generate a “default” external route into the AS, the metric value specified in this command supersedes the metric specified in the **default-information originate** command.
- Metric type specifies the way to advertise routes to destinations outside the AS via External LSAs. Specify Type 1 to add the internal cost metric to the external route metric. In other words, the cost of the route from any router within the AS is equal to the cost associated with reaching the advertising ASBR, plus the cost of the external route. Specify Type 2 to only advertise the external route metric.

Example

This example redistributes routes learned from RIP as Type 1 external routes.

```
Console(config-router)#redistribute rip metric-type 1
Console(config-router)#
```

Related Commands

default-information originate (4-262)

network area

This command defines an OSPF area and the interfaces that operate within this area. Use the **no** form to disable OSPF for a specified interface.

Syntax

[no] network *ip-address netmask area area-id*

- *ip-address* - Address of the interfaces to add to the area.
- *netmask* - Network mask of the address range to add to the area.
- *area-id* - Area to which the specified address or range is assigned. An OSPF area identifies a group of routers that share common routing information. (The area ID must be in the form of an IP address.)

Command Mode

Router Configuration

Default Setting

Disabled

Command Usage

- An area ID uniquely defines an OSPF broadcast area. The area ID 0.0.0.0 indicates the OSPF backbone for an autonomous system. Each router must be connected to the backbone via a direct connection or a virtual link.
- Set the area ID to the same value for all routers on a network segment using the network mask to add one or more interfaces to an area.
- Be sure to include the primary address for an interface in the network area, otherwise, OSPF will not operate for any secondary addresses covered by the command.
- An interface can only be assigned to a single area. If an address range is overlapped in subsequent network area commands, the router will implement the address range for the area specified in first command, and ignore the overlapping ranges in subsequent commands. However, note that if a more specific address range is removed from an area, the interface belonging to that range may still remain active if a less specific address range covering that area has been specified.
- This router supports up to 64 OSPF router interfaces, and up to 16 total areas (either normal transit areas, stubs, or NSSAs).

Example

This example creates the backbone 0.0.0.0 covering class B addresses 10.1.x.x, and a normal transit area 10.2.9.0 covering the class C addresses 10.2.9.x.

```
Console(config-router)#network 10.1.0.0 255.255.0.0 area 0.0.0.0
Console(config-router)#network 10.2.9.0 255.255.255.0 area 10.1.0.0
Console(config-router)#
```

4 Command Line Interface

area stub

This command defines a stub area. To remove a stub, use the **no** form without the optional keyword. To remove the summary attribute, use the **no** form with the summary keyword.

Syntax

[no] area *area-id* stub [summary]

- ***area-id*** - Identifies the stub area.
(The area ID must be in the form of an IP address.)
- **summary** - Makes an Area Border Router (ABR) send a summary link advertisement into the stub area. (Default: no summary)

Command Mode

Router Configuration

Default Setting

No stub is configured.

Command Usage

- All routers in a stub must be configured with the same area ID.
- Routing table space is saved in a stub by blocking Type-4 AS summary LSAs and Type 5 external LSAs. The default setting for this command completely isolates the stub by blocking Type-3 summary LSAs that advertise the default route for destinations external to the local area or the autonomous system.
- Use the **area default-cost** command to specify the cost of a default summary route sent into a stub by an ABR.
- This router supports up to 16 total areas (either normal transit areas, stubs, or NSSAs).

Example

This example creates a stub area 10.2.0.0, and assigns all interfaces with class B addresses 10.2.x.x to the stub.

```
Console(config-router)#area 10.2.0.0 stub
Console(config-router)#network 10.2.0.0 0.255.255.255 area 10.2.0.0
Console(config-router)#
```

Related Commands

area default-cost (4-264)

area nssa

This command defines a not-so-stubby area (NSSA). To remove an NSSA, use the **no** form without any optional keywords. To remove an optional attribute, use the **no** form without the relevant keyword.

Syntax

[no] area *area-id* nssa [no-redistribution] [default-information-originate]

- ***area-id*** - Identifies the NSSA.
(The area ID must be in the form of an IP address.)
- **no-redistribution** - Use this keyword when the router is an NSSA Area Border Router (ABR) and you want the **redistribute** command to import routes only into normal areas, and not into the NSSA. In other words, this keyword prevents the NSSA ABR from advertising external routing information (learned via routers in other areas) into the NSSA.
- **default-information-originate** - When the router is an NSSA Area Border Router (ABR) or an NSSA Autonomous System Boundary Router (ASBR), this parameter causes it to generate Type-7 default LSA into the NSSA. This default provides a route to other areas within the AS for an NSSA ABR, or to areas outside the AS for an NSSA ASBR.

Command Mode

Router Configuration

Default Setting

No NSSA is configured.

Command Usage

- All routers in a NSSA must be configured with the same area ID.
- An NSSA is similar to a stub, because when the router is an ABR, it can send a default route for other areas in the AS into the NSSA using the **default-information-originate** keyword. However, an NSSA is different from a stub, because when the router is an ASBR, it can import a default external AS route (for routing protocol domains adjacent to the NSSA but not within the OSPF AS) into the NSSA using the **default-information-originate** keyword.
- External routes advertised into an NSSA can include network destinations outside the AS learned via OSPF, the default route, static routes, routes imported from other routing protocols such as RIP, and networks directly connected to the router that are not running OSPF.
- NSSA external LSAs (Type 7) are converted by any ABR adjacent to the NSSA into external LSAs (Type-5), and propagated into other areas within the AS.
- Also, note that unlike stub areas, all Type-3 summary LSAs are always imported into NSSAs to ensure that internal routes are always chosen over Type-7 NSSA external routes.
- This router supports up to 16 total areas (either normal transit areas, stubs, or NSSAs).

4 Command Line Interface

Example

This example creates a stub area 10.3.0.0, and assigns all interfaces with class B addresses 10.3.x.x to the NSSA. It also instructs the router to generate external LSAs into the NSSA when it is an NSSA ABR or NSSA ASBR.

```
Console(config-router)#area 10.3.0.0 nssa default-information-originate
Console(config-router)#network 10.3.0.0 255.255.0.0 area 10.2.0.0
Console(config-router)#
```

area virtual-link

This command defines a virtual link. To remove a virtual link, use the **no** form with no optional keywords. To restore the default value for an attribute, use the **no** form with the required keyword.

Syntax

```
[no] area area-id virtual-link router-id
  [authentication [message-digest | null ]] [hello-interval seconds]
  [retransmit-interval seconds] [transmit-delay seconds] [dead-interval
  seconds] [[authentication-key key] | [message-digest-key key-id md5
  key]]
no area area-id
```

- **area-id** - Identifies the transit area for the virtual link. (The area ID must be in the form of an IP address.)
- **router-id** - Router ID of the virtual link neighbor. This must be an Area Border Router (ABR) that is adjacent to both the backbone and the transit area at the other end of the virtual link.
- **authentication** - Specifies the authentication mode. If no optional parameters follow this keyword, then plain text authentication is used along with the password specified by the **authentication-key**. If **message-digest** authentication is specified, then the **message-digest-key** and **md5** parameters must also be specified. If the **null** option is specified, then no authentication is performed on any OSPF routing protocol messages.
- **message-digest** - Specifies message-digest (MD5) authentication.
- **null** - Indicates that no authentication is used.
- **hello-interval seconds** - Specifies the transmit delay between sending hello packets. Setting the hello interval to a smaller value can reduce the delay in detecting topological changes, but will increase the routing traffic. This value must be the same for all routers attached to an autonomous system. (Range: 1-65535 seconds; Default: 10 seconds)
- **retransmit-interval seconds** - Specifies the interval at which the ABR retransmits link-state advertisements (LSA) over the virtual link. The retransmit interval should be set to a conservative value that provides an adequate flow of routing information, but does not produce unnecessary protocol traffic. However, note that this value should be larger for virtual links. (Range: 1-3600 seconds; Default: 5 seconds)
- **transmit-delay seconds** - Estimates the time required to send a link-state update packet over the virtual link, considering the transmission and

- propagation delays. LSAs have their age incremented by this amount before transmission. This value must be the same for all routers attached to an autonomous system. (Range: 1-3600 seconds; Default: 1 seconds)
- **dead-interval** *seconds* - Specifies the time that neighbor routers will wait for a hello packet before they declare the router down. This value must be the same for all routers attached to an autonomous system. (Range: 1-65535 seconds; Default: 4 x hello interval, or 40 seconds)
 - **authentication-key** *key* - Sets a plain text password (up to 8 characters) that is used by neighboring routers on a virtual link to generate or verify the authentication field in protocol message headers. A separate password can be assigned to each network interface. However, this key must be the same for all neighboring routers on the same network (i.e., autonomous system). This key is only used when authentication is enabled for the backbone.
 - **message-digest-key** *key-id md5 key* - Sets the key identifier and password to be used to authenticate protocol messages passed between neighboring routers and this router when using message digest (MD5) authentication. The *key-id* is an integer from 1-255, and the *key* is an alphanumeric string up to 16 characters long. If MD5 authentication is used on a virtual link, then it must be enabled on all routers within an autonomous system; and the key identifier and key must also be the same for all routers.

Command Mode

Router Configuration

Default Setting

area-id: None

router-id: None

hello-interval: 10 seconds

retransmit-interval: 5 seconds

transmit-delay: 1 second

dead-interval: 40 seconds

authentication-key: None

message-digest-key: None

Command Usage

- All areas must be connected to a backbone area (0.0.0.0) to maintain routing connectivity throughout the autonomous system. If it not possible to physically connect an area to the backbone, you can use a virtual link. A virtual link can provide a logical path to the backbone for an isolated area. You can specify up to 32 virtual links on this router.
- Any area disconnected from the backbone must include the transit area ID and the router ID for a virtual link neighbor that is adjacent to the backbone.
- This router supports up to 64 virtual links.

4 Command Line Interface

Example

This example creates a virtual link using the defaults for all optional parameters.

```
Console(config-router)#network 10.4.0.0 0.255.255.0.0 area 10.4.0.0
Console(config-router)#area 10.4.0.0 virtual-link 10.4.3.254
Console(config-router)#
```

This example creates a virtual link using MD5 authentication.

```
Console(config-router)#network 10.4.0.0 0.255.255.0.0 area 10.4.0.0
Console(config-router)#area 10.4.0.0 virtual-link 10.4.3.254
message-digest-key 5 md5 ld83jdpq
Console(config-router)#
```

Related Commands

show ip ospf virtual-links (4-290)

ip ospf authentication

This command specifies the authentication type used for an interface. Enter this command without any optional parameters to specify plain text (or simple password) authentication. Use the **no** to restore the default of no authentication.

Syntax

```
ip ospf authentication [message-digest | null]
no ip ospf authentication
```

- **message-digest** - Specifies message-digest (MD5) authentication.
- **null** - Indicates that no authentication is used.

Command Mode

Interface Configuration (VLAN)

Default Setting

No authentication

Command Usage

- Before specifying plain-text password authentication for an interface, configure a password with the **ip ospf authentication-key** command. Before specifying MD5 authentication for an interface, configure the message-digest key-id and key with the **ip ospf message-digest-key** command.
- The plain-text authentication-key, or the MD5 key-id and key, must be used consistently throughout the autonomous system.

Example

This example enables message-digest authentication for the specified interface.

```
Console(config)#interface vlan 1
Console(config-if)#ip ospf authentication message-digest
Console(config-if)#
```

Related Commands

ip ospf authentication-key (4-273)
ip ospf message-digest-key (4-274)

ip ospf authentication-key

This command assigns a simple password to be used by neighboring routers. Use the **no** form to remove the password.

Syntax

ip ospf authentication-key *key*
no ip ospf authentication-key

key - Sets a plain text password. (Range: 1-8 characters)

Command Mode

Interface Configuration (VLAN)

Default Setting

No password

Command Usage

- Before specifying plain-text password authentication for an interface, configure a password with the **ip ospf authentication-key** command. Before specifying MD5 authentication for an interface, configure the message-digest key-id and key with the **ip ospf message-digest-key** command.
- A different password can be assigned to each network interface basis, but the password must be used consistently on all neighboring routers throughout a network (i.e., autonomous system).

Example

This example sets a password for the specified interface.

```
Console(config)#interface vlan 1
Console(config-if)#ip ospf authentication-key badboy
Console(config-if)#
```

Related Commands

ip ospf authentication (4-272)

4 Command Line Interface

ip ospf message-digest-key

This command enables message-digest (MD5) authentication on the specified interface and to assign a key-id and key to be used by neighboring routers. Use the **no** form to remove an existing key.

Syntax

```
ip ospf message-digest-key key-id md5 key  
no ip ospf message-digest-key key-id
```

- *key-id* - Index number of an MD5 key. (Range: 1-255)
- *key* - Alphanumeric password used to generate a 128 bit message digest or "fingerprint." (Range: 1-16 characters)

Command Mode

Interface Configuration (VLAN)

Default Setting

MD5 authentication is disabled.

Command Usage

- Normally, only one key is used per interface to generate authentication information for outbound packets and to authenticate incoming packets. Neighbor routers must use the same key identifier and key value.
- When changing to a new key, the router will send multiple copies of all protocol messages, one with the old key and another with the new key. Once all the neighboring routers start sending protocol messages back to this router with the new key, the router will stop using the old key. This rollover process gives the network administrator time to update all the routers on the network without affecting the network connectivity. Once all the network routers have been updated with the new key, the old key should be removed for security reasons.

Example

This example sets a message-digest key identifier and password.

```
Console(config)#interface vlan 1  
Console(config-if)#ip ospf message-digest-key 1 md5 aiebel  
Console(config-if)#
```

Related Commands

ip ospf authentication (4-272)

ip ospf cost

This command explicitly sets the cost of sending a packet on an interface. Use the **no** form to restore the default value.

Syntax

ip ospf cost *cost*

no ip ospf cost

cost - Link metric for this interface. Use higher values to indicate slower ports. (Range: 1-65535)

Command Mode

Interface Configuration (VLAN)

Default Setting

1

Command Usage

Interface cost reflects the port speed. This router uses a default cost of 1 for all ports. Therefore, if you install a Gigabit module, you may have to reset the cost for all of the 100 Mbps ports to a value greater than 1.

Example

```
Console(config)#interface vlan 1
Console(config-if)#ip ospf cost 10
Console(config-if)#
```

ip ospf dead-interval

This command sets the interval at which hello packets are not seen before neighbors declare the router down. Use the **no** form to restore the default value.

Syntax

ip ospf dead-interval *seconds*

no ip ospf dead-interval

seconds - The maximum time that neighbor routers can wait for a hello packet before declaring the transmitting router down. This interval must be set to the same value for all routers on the network. (Range: 1-65535)

Command Mode

Interface Configuration (VLAN)

Default Setting

40, or four times the interval specified by the **ip ospf hello-interval** command.

Example

```
Console(config)#interface vlan 1
Console(config-if)#ip ospf dead-interval 50
Console(config-if)#
```

4 Command Line Interface

Related Commands

ip ospf hello-interval (4-276)

ip ospf hello-interval

This command specifies the interval between sending hello packets on an interface. Use the **no** form to restore the default value.

Syntax

ip ospf hello-interval *seconds*
no ip ospf hello-interval

seconds - Interval at which hello packets are sent from an interface. This interval must be set to the same value for all routers on the network.
(Range: 1-65535)

Command Mode

Interface Configuration (VLAN)

Default Setting

10 seconds

Command Usage

Hello packets are used to inform other routers that the sending router is still active. Setting the hello interval to a smaller value can reduce the delay in detecting topological changes, but will increase routing traffic.

Example

```
Console(config)#interface vlan 1
Console(config-if)#ip ospf hello-interval 5
Console(config-if)#
```

ip ospf priority

This command sets the router priority used when determining the designated router (DR) and backup designated router (BDR) for an area. Use the **no** form to restore the default value.

Syntax

ip ospf priority *priority*
no ip ospf priority

priority - Sets the interface priority for this router. (Range: 0-255)

Command Mode

Interface Configuration (VLAN)

Default Setting

1

Command Usage

- Set the priority to zero to prevent a router from being elected as a DR or BDR. If set to any value other than zero, the router with the highest priority will become the DR and the router with the next highest priority becomes the BDR. If two or more routers are tied with the same highest priority, the router with the higher ID will be elected.
- If a DR already exists for an area when this interface comes up, the new router will accept the current DR regardless of its own priority. The DR will not change until the next time the election process is initiated.

Example

```
Console(config)#interface vlan 1
Console(config-if)#ip ospf priority 5
Console(config-if)#
```

ip ospf retransmit-interval

This command specifies the time between resending link-state advertisements (LSAs). Use the **no** form to restore the default value.

Syntax

ip ospf retransmit-interval *seconds*
no ip ospf retransmit-interval

seconds - Sets the interval at which LSAs are retransmitted from this interface. (Range: 1-65535)

Command Mode

Interface Configuration (VLAN)

Default Setting

5 seconds

Command Usage

A router will resend an LSA to a neighbor if it receives no acknowledgment. The retransmit interval should be set to a conservative value that provides an adequate flow of routing information, but does not produce unnecessary protocol traffic. Note that this value should be larger for virtual links.

Example

```
Console(config)#interface vlan 1
Console(config-if)#ip ospf retransmit-interval 7
Console(config-if)#
```

4 Command Line Interface

ip ospf transmit-delay

This command sets the estimated time to send a link-state update packet over an interface. Use the **no** form to restore the default value.

Syntax

ip ospf transmit-delay *seconds*

no ip ospf transmit-delay

seconds - Sets the estimated time required to send a link-state update.
(Range: 1-65535)

Command Mode

Interface Configuration (VLAN)

Default Setting

1 second

Command Usage

LSAs have their age incremented by this delay before transmission. When estimating the transmit delay, consider both the transmission and propagation delays for an interface. Set the transmit delay according to link speed, using larger values for lower-speed links. The transmit delay must be the same for all routers attached to an autonomous system.

Example

```
Console(config)#interface vlan 1
Console(config-if)#ip ospf transmit-delay 6
Console(config-if)#
```

show ip ospf

This command shows basic information about the routing configuration.

Command Mode

Privileged Exec

Example

```
Console#show ip ospf
Routing Process with ID 10.1.1.253
Supports only single TOS(TOS0) route
It is an area border and autonomous system boundary router
Redistributing External Routes from,
    rip with metric mapped to 10
Number of area in this router is 2
Area 0.0.0.0 (BACKBONE)
    Number of interfaces in this area is 1
    SPF algorithm executed 19 times
Area 10.1.0.0
    Number of interfaces in this area is 4
    SPF algorithm executed 19 times
Console#
```

Table 4-86 show ip ospf - display description

Field	Description
Routing Process with ID	Router ID
Supports only single TOS (TOS0) route	Type of service is not supported, so you can only assign one cost per interface
It is an <i>router type</i>	The types displayed include internal, area border, or autonomous system boundary routers
Number of areas in this router	The number of configured areas
Area <i>identifier</i>	The area address, and area type if backbone, NSSA or stub
Number of interfaces	The number of interfaces attached to this area
SPF algorithm executed	The number of times the shortest path first algorithm has been executed for this area

show ip ospf border-routers

This command shows entries in the routing table that lead to an Area Border Router (ABR) or Autonomous System Boundary Router (ASBR).

Command Mode

Privileged Exec

Example

```

Console#show ip ospf border-routers

```

Destination	Next Hop	Cost	Type	RteType	Area	SPF No
10.1.1.252	10.1.1.253	0	ABR	INTRA	10.1.0.0	3
10.2.6.252	10.2.9.253	0	ASBR	INTER	10.2.0.0	7

```

Console#

```

Table 4-87 show ip ospf border-routers - display description

Field	Description
Destination	Identifier for the destination router
Next Hop	IP address of the next hop toward the destination
Cost	Link metric for this route
Type	Router type of the destination; either ABR, ASBR or both
RteType	Route type; either intra-area or interarea route (INTRA or INTER)
Area	The area from which this route was learned
SPF No	The number of times the shortest path first algorithm has been executed for this route

show ip ospf database

This command shows information about different OSPF Link State Advertisements (LSAs) stored in this router's database.

Syntax

```

show ip ospf [area-id] database [adv-router [ip-address]]
show ip ospf [area-id] database [asbr-summary] [link-state-id]
show ip ospf [area-id] database [asbr-summary] [link-state-id] [adv-router [ip-address]]
show ip ospf [area-id] database [asbr-summary] [link-state-id] [self-originate] [link-state-id]
show ip ospf [area-id] database [database-summary]
show ip ospf [area-id] database [external] [link-state-id]
show ip ospf [area-id] database [external] [link-state-id] [adv-router [ip-address]]
show ip ospf [area-id] database [external] [link-state-id] [self-originate] [ip-address]
show ip ospf [area-id] database [network] [link-state-id]
show ip ospf [area-id] database [network] [link-state-id] [adv-router [ip-address]]
show ip ospf [area-id] database [network] [link-state-id] [self-originate] [link-state-id]
show ip ospf [area-id] database [nssa-external] [link-state-id]
show ip ospf [area-id] database [nssa-external] [link-state-id] [adv-router [ip-address]]
show ip ospf [area-id] database [nssa-external] [link-state-id] [self-originate] [link-state-id]
show ip ospf [area-id] database [router] [link-state-id]
show ip ospf [area-id] database [[router] [adv-router [ip-address]]]
show ip ospf [area-id] database [router] [self-originate] [link-state-id]
show ip ospf [area-id] database [self-originate] [link-state-id]
show ip ospf [area-id] database [summary] [link-state-id]
show ip ospf [area-id] database [summary] [link-state-id] [adv-router [ip-address]]
show ip ospf [area-id] database [summary] [link-state-id] [self-originate] [link-state-id]

```

- *area-id* - Area defined for which you want to view LSA information. (This item must be entered in the form of an IP address.)
- **adv-router** - IP address of the advertising router. If not entered, information about all advertising routers is displayed.
- *ip-address* - IP address of the specified router. If no address is entered, information about the local router is displayed.
- **asbr-summary** - Shows information about Autonomous System Boundary Router summary LSAs.
- *link-state-id* - The network portion described by an LSA. The *link-state-id* entered should be:
 - An IP network number for Type 3 Summary and External LSAs
 - A Router ID for Router, Network, and Type 4 AS Summary LSAs
 Also, note that when an Type 5 ASBR External LSA is describing a default route, its *link-state-id* is set to the default destination (0.0.0.0).
- **self-originate** - Shows LSAs originated by this router.
- **database-summary** - Shows a count for each LSA type for each area stored in the database, and the total number of LSAs in the database.
- **external** - Shows information about external LSAs.
- **network** - Shows information about network LSAs.
- **nssa-external** - Shows information about NSSA external LSAs.
- **router** - Shows information about router LSAs.
- **summary** - Shows information about summary LSAs.

Command Mode

Privileged Exec

Examples

The following shows output for the **show ip ospf database** command.

```

Console#show ip ospf database

      Displaying Router Link States (Area 10.1.0.0)
      Link ID      ADV Router      Age      Seq#      Checksum
-----
10.1.1.252      10.1.1.252      26      0X80000005      0X89A1
10.1.1.253      10.1.1.253      23      0X80000002      0X8D9D

      Displaying Net Link States (Area 10.1.0.0)
      Link ID      Net      ADV Router      Age      Seq#      Checksum
-----
10.1.1.252      10.1.1.252      28      0X80000001      0X53E1
Console#

```

Table 4-88 show ip ospf database - display description

Field	Description
Link ID	Router ID
ADV Router	Advertising router ID
Age	Age of LSA (in seconds)
Seq#	Sequence number of LSA (used to detect older duplicate LSAs)
Checksum	Checksum of the complete contents of the LSA

4 Command Line Interface

The following shows output when using the **asbr-summary** keyword.

```
Console#show ip ospf database asbr-summary

OSPF Router with id(10.1.1.253)

    Displaying Summary ASB Link States(Area 0.0.0.0)

LS age: 433
Options: (No TOS-capability)
LS Type: Summary Links (AS Boundary Router)
Link State ID: 192.168.5.1 (AS Boundary Router's Router ID)
Advertising Router: 192.168.1.5
LS Sequence Number: 80000002
LS Checksum: 0x51E2
Length: 32
Network Mask: 255.255.255.0
Metric: 1

Console#
```

Table 4-89 show ip ospf asbr-summary - display description

Field	Description
OSPF Router id	Router ID
LS age	Age of LSA (in seconds)
Options	Optional capabilities associated with the LSA
LS Type	Summary Links - LSA describes routes to AS boundary routers
Link State ID	Interface address of the autonomous system boundary router
Advertising Router	Advertising router ID
LS Sequence Number	Sequence number of LSA (used to detect older duplicate LSAs)
LS Checksum	Checksum of the complete contents of the LSA
Length	The length of the LSA in bytes
Network Mask	Address mask for the network
Metrics	Cost of the link

The following shows output when using the **database-summary** keyword.

```

Console#show ip ospf database database-summary

Area ID (10.1.1.0.0)
  Router      Network    Sum-Net    Sum-ASBR   External-AS  External-Nssa
    2         1          1          0          0            0
Total LSA Counts : 4
Console#

```

Table 4-90 show ip ospf database-summary - display description

Field	Description
Area ID	Area identifier
Router	Number of router LSAs
Network	Number of network LSAs
Sum-Net	Number of summary LSAs
Sum-ASBR	Number of summary ASBR LSAs
External-AS	Number of autonomous system external LSAs
External-Nssa	Number of NSSA external network LSAs
Total LSA Counts	Total number of LSAs

4 Command Line Interface

The following shows output when using the **external** keyword.

```
Console#show ip ospf database external

OSPF Router with id(192.168.5.1) (Autonomous system 5)

    Displaying AS External Link States

LS age: 433
Options: (No TOS-capability)
LS Type: AS External Link
Link State ID: 10.1.1.253 (External Network Number)
Advertising Router: 10.1.2.254
LS Sequence Number: 80000002
LS Checksum: 0x51E2
Length: 32
Network Mask: 255.255.0.0
Metric Type: 2 (Larger than any link state path)
Metric: 1
Forward Address: 0.0.0.0
External Route Tag: 0

Console#
```

Table 4-91 show ip ospf external - display description

Field	Description
OSPF Router id	Router ID
LS age	Age of LSA (in seconds)
Options	Optional capabilities associated with the LSA
LS Type	AS External Links - LSA describes routes to destinations outside the AS (including default external routes for the AS)
Link State ID	IP network number (External Network Number)
Advertising Router	Advertising router ID
LS Sequence Number	Sequence number of LSA (used to detect older duplicate LSAs)
LS Checksum	Checksum of the complete contents of the LSA
Length	The length of the LSA in bytes
Network Mask	Address mask for the network
Metric Type	Type 1 or Type 2 external metric (see "redistribute" on page 4-266)
Metrics	Cost of the link
Forward Address	Forwarding address for data to be passed to the advertised destination (If set to 0.0.0.0, data is forwarded to the originator of the advertisement)
External Route Tag	32-bit field attached to each external route (Not used by OSPF; may be used to communicate other information between boundary routers as defined by specific applications)

The following shows output when using the **network** keyword.

```

Console#show ip ospf database network

OSPF Router with id(10.1.1.253)

        Displaying Net Link States(Area 10.1.0.0)

Link State Data Network (Type 2)
-----

LS age: 433
Options: Support External routing capability
LS Type: Network Links
Link State ID: 10.1.1.252 (IP interface address of the Designated Router)
Advertising Router: 10.1.1.252
LS Sequence Number: 80000002
LS Checksum: 0x51E2
Length: 32
Network Mask: 255.255.255.0

        Attached Router: 10.1.1.252
        Attached Router: 10.1.1.253
Console#

```

Table 4-92 show ip ospf network - display description

Field	Description
OSPF Router id	Router ID
LS age	Age of LSA (in seconds)
Options	Optional capabilities associated with the LSA
LS Type	Network Link - LSA describes the routers attached to the network
Link State ID	Interface address of the designated router
Advertising Router	Advertising router ID
LS Sequence Number	Sequence number of LSA (used to detect older duplicate LSAs)
LS Checksum	Checksum of the complete contents of the LSA
Length	The length of the LSA in bytes
Network Mask	Address mask for the network
Attached Router	List of routers attached to the network; i.e., fully adjacent to the designated router, including the designated router itself

4 Command Line Interface

The following shows output when using the **router** keyword.

```
Console#show ip ospf database router

OSPF Router with id(10.1.1.253)

        Displaying Router Link States(Area 10.1.0.0)

Link State Data Router (Type 1)
-----

LS age: 233
Options: Support External routing capability
LS Type: Router Links
Link State ID: 10.1.1.252 (Originating Router's Router ID)
Advertising Router: 10.1.1.252
LS Sequence Number: 80000011
LS Checksum: 0x7287
Length: 48
Router Role: Area Border Router
Number of Links: 1
-----
Link ID: 10.1.7.0 (IP Network/Subnet Number)
  Link Data: 255.255.255.0 (Network's IP address mask)
  Link Type: Connection to a stub network
  Number of TOS metrics: 0
  Metrics: 1

Console#
```

Table 4-93 show ip ospf router - display description

Field	Description
OSPF Router id	Router ID
LS age	Age of LSA (in seconds)
Options	Optional capabilities associated with the LSA
LS Type	Router Link - LSA describes the router's interfaces.
Link State ID	Router ID of the router that originated the LSA
Advertising Router	Advertising router ID
LS Sequence Number	Sequence number of LSA (used to detect older duplicate LSAs)
LS Checksum	Checksum of the complete contents of the LSA
Length	The length of the LSA in bytes
Router Role	Description of router type, including: None, AS Boundary Router, Area Border Router, or Virtual Link
Number of Links	Number of links described by the LSA
Link ID	Link type and corresponding Router ID or network address
Link Data	<ul style="list-style-type: none">• Router ID for transit network• Network's IP address mask for stub network• Neighbor Router ID for virtual link
Link Type	Link-state type, including transit network, stub network, or virtual link

Table 4-93 show ip ospf router - display description (Continued)

Field	Description
Number of TOS metrics	Type of Service metric – This router only supports TOS 0 (or normal service)
Metrics	Cost of the link

The following shows output when using the **summary** keyword.

```

Console#show ip ospf database summary

OSPF Router with id(10.1.1.253)

    Displaying Summary Net Link States(Area 10.1.0.0)

Link State Data Summary (Type 3)
-----

LS age: 686
Options: Support External routing capability
LS Type: Summary Links(Network)
Link State ID: 10.2.6.0 (The destination Summary Network Number)
Advertising Router: 10.1.1.252
LS Sequence Number: 80000003
LS Checksum: 0x3D02
Length: 28
Network Mask: 255.255.255.0
Metric: 1

Console#

```

Table 4-94 show ip ospf summary - display description

Field	Description
OSPF Router id	Router ID
LS age	Age of LSA (in seconds)
Options	Optional capabilities associated with the LSA
LS Type	Summary Links - LSA describes routes to networks
Link State ID	Router ID of the router that originated the LSA
Advertising Router	Advertising router ID
LS Sequence Number	Sequence number of LSA (used to detect older duplicate LSAs)
LS Checksum	Checksum of the complete contents of the LSA
Length	The length of the LSA in bytes
Network Mask	Destination network's IP address mask
Metrics	Cost of the link

4 Command Line Interface

show ip ospf interface

This command displays summary information for OSPF interfaces.

Syntax

```
show ip ospf interface [vlan vlan-id]
```

vlan-id - VLAN ID (Range: 1-4094)

Command Mode

Privileged Exec

Example

```
Console#show ip ospf interface vlan 1

Vlan 1 is up
  Interface Address 10.1.1.253, Mask 255.255.255.0, Area 10.1.0.0
  Router ID 10.1.1.253, Network Type BROADCAST, Cost: 1
  Transmit Delay is 1 sec, State BDR, Priority 1
  Designated Router id 10.1.1.252, Interface address 10.1.1.252
  Backup Designated router id 10.1.1.253, Interface addr 10.1.1.253
  Timer intervals configured, Hello 10, Dead 40, Retransmit 5

Console#
```

Table 4-95 show ip ospf interface - display description

Field	Description
Vlan	VLAN ID and Status of physical link
Interface Address	IP address of OSPF interface
Mask	Network mask for interface address
Area	OSPF area to which this interface belongs
Router ID	Router ID
Network Type	Includes broadcast, non-broadcast, or point-to-point networks
Cost	Interface transmit cost
Transmit Delay	Interface transmit delay (in seconds)
State	<ul style="list-style-type: none">• Disabled – OSPF not enabled on this interface• Down – OSPF is enabled on this interface, but interface is down• Loopback – This is a loopback interface• Waiting – Router is trying to find the DR and BDR• DR – Designated Router• BDR – Backup Designated Router• DROther – Interface is on a multiaccess network, but is not the DR or BDR
Priority	Router priority
Designated Router	Designated router ID and respective interface address
Backup Designated Router	Backup designated router ID and respective interface address
Timer intervals	Configuration settings for timer intervals, including Hello, Dead and Retransmit

show ip ospf neighbor

This command displays information about neighboring routers on each interface within an OSPF area.

Syntax

show ip ospf neighbor

Command Mode

Privileged Exec

Example

```

Console#show ip ospf neighbor

      ID                Pri          State           Address
-----
 10.1.1.252            1          FULL/DR        10.1.1.252
Console#

```

Table 4-96 show ip ospf neighbor - display description

Field	Description
ID	Neighbor's router ID
Pri	Neighbor's router priority
State	OSPF state and identification flag States include: Down – Connection down Attempt – Connection down, but attempting contact (for non-broadcast networks) Init – Have received Hello packet, but communications not yet established Two-way – Bidirectional communications established ExStart – Initializing adjacency between neighbors Exchange – Database descriptions being exchanged Loading – LSA databases being exchanged Full – Neighboring routers now fully adjacent Identification flags include: D – Dynamic neighbor S – Static neighbor DR – Designated router BDR – Backup designated router
Address	IP address of this interface

4 Command Line Interface

show ip ospf summary-address

This command displays all summary address information.

Syntax

```
show ip ospf summary-address
```

Command Mode

Privileged Exec

Example

This example shows a summary address and associated network mask.

```
Console#show ip ospf summary-address
10.1.0.0/255.255.0.0
Console#
```

Related Commands

summary-address (4-265)

show ip ospf virtual-links

This command displays detailed information about virtual links.

Syntax

```
show ip ospf virtual-links
```

Command Mode

Privileged Exec

Example

```
Console#show ip ospf virtual-links
Virtual Link to router 10.1.1.253 is up
Transit area 10.1.1.0
Transmit Delay is 1 sec
Timer intervals configured, Hello 10, Dead 40, Retransmit 5
Console#
```

Table 4-97 show ip ospf virtual-links - display description

Field	Description
Virtual Link to router	OSPF neighbor and link state (up or down)
Transit area	Common area the virtual link crosses to reach the target router
Transmit Delay	Estimated transmit delay (in seconds) on the virtual link
Timer intervals	Configuration settings for timer intervals, including Hello, Dead and Retransmit

Related Commands

area virtual-link (4-270)

Multicast Routing Commands

This router uses IGMP snooping and query to determine the ports connected to downstream multicast hosts, and to propagate this information back up through the multicast tree to ensure that requested services are forwarded through each intermediate node between the multicast server and its hosts, and also to filter traffic from all of the other interfaces that do not require these services.

Multicast routers use snooping and query messages, along with a multicast routing protocol to deliver IP multicast packets across different subnetworks. This router supports both the Distance-Vector Multicast Routing Protocol (DVMRP) and Protocol Independent Multicasting (PIM). (Note that you should enable IGMP for any interface that is using multicast routing.)

Table 4-98 Multicast Routing Commands

Command Groups	Function	Page
Static Multicast Routing	Configures static multicast router ports	4-291
General Multicast Routing	Enables IP multicast routing globally; also displays the IP multicast routing table created from static and dynamic routing information	4-293
DVMRP Multicast Routing	Configures global and interface settings for DVMRP	4-295
PIM-DM Multicast Routing	Configures global and interface settings for PIM-DM	4-304

Static Multicast Routing Commands

Table 4-99 Static Multicast Routing Commands

Command	Function	Mode	Page
ip igmp snooping vlan mrouter	Adds a multicast router port	GC	4-291
show ip igmp snooping mrouter	Shows multicast router ports	PE	4-292

ip igmp snooping vlan mrouter

This command statically configures a multicast router port. Use the **no** form to remove the configuration.

Syntax

[no] ip igmp snooping vlan *vlan-id* mrouter *interface*

- *vlan-id* - VLAN ID (Range: 1-4094)
- *interface*
 - **ethernet** *unit/port*
 - *unit* - This is device 1.
 - *port* - Port number.
 - **port-channel** *channel-id* (Range: 1-6)

4 Command Line Interface

Default Setting

No static multicast router ports are configured.

Command Mode

Global Configuration

Command Usage

Depending on your network connections, IGMP snooping may not always be able to locate the IGMP querier. Therefore, if the IGMP querier is a known multicast router/switch connected over the network to an interface (port or trunk) on your router, you can manually configure that interface to join all the current multicast groups.

Example

The following shows how to configure port 11 as a multicast router port within VLAN 1:

```
Console(config)#ip igmp snooping vlan 1 mrouter ethernet 1/11
Console(config)#
```

show ip igmp snooping mrouter

This command displays information on statically configured and dynamically learned multicast router ports.

Syntax

show ip igmp snooping mrouter [vlan *vlan-id*]

vlan-id - VLAN ID (Range: 1-4094)

Default Setting

Displays multicast router ports for all configured VLANs.

Command Mode

Privileged Exec

Command Usage

Multicast router port types displayed include Static or Dynamic.

Example

The following shows that port 11 in VLAN 1 is attached to a multicast router:

```
Console#show ip igmp snooping mrouter vlan 1
VLAN M'cast Router Ports Type
-----
 1           Eth 1/11  Static
 2           Eth 1/12  Dynamic
Console#
```


General Multicast Routing Commands

Table 4-100 General Multicast Routing Commands

Command	Function	Mode	Page
ip multicast-routing	Enables IP multicast routing	GC	4-293
show ip mroute	Shows the IP multicast routing table	PE	4-293

ip multicast-routing

This command enables IP multicast routing. Use the **no** form to disable IP multicast routing.

Syntax

[no] ip multicast-routing

Default Setting

Disabled

Command Mode

Global Configuration

Command Usage

This command is used to enable multicast routing globally for the router. You also need to globally enable a specific multicast routing protocol using the **router dvmrp** or **router pim** command, and then specify the interfaces that will support multicast routing using the **ip dvmrp** or **ip pim dense-mode** commands.

Example

```
Console(config)#ip multicast-routing
Console(config)#
```

show ip mroute

This command displays the IP multicast routing table.

Syntax

show ip mroute [*group-address source*] [*summary*]

- *group-address* - An IP multicast group address with subscribers directly attached or downstream from this router.
- *source* - The IP subnetwork at the root of the multicast delivery tree. This subnetwork contains a known multicast source.
- **summary** - Displays summary information for each entry in the IP multicast routing table.

4 Command Line Interface

Command Mode

Privileged Exec

Command Usage

This command displays information for multicast routing. If no optional parameters are selected, detailed information for each entry in the multicast address table is displayed. If you select a multicast group and source pair, detailed information is displayed only for the specified entry. If the **summary** option is selected, an abbreviated list of information for each entry is displayed on a single line.

Example

This example shows detailed multicast information for a specified group/source pair

```
Console#show ip mroute 224.0.255.3 192.111.46.8
IP Multicast Forwarding is enabled.

IP Multicast Routing Table

Flags: P - Prune, F - Forwarding
(192.111.46.0, 255.255.255.0, 224.0.255.3)
Owner: DVMRP
Upstream Interface: vlan1
Upstream Router: 148.122.34.9
Downstream: vlan2(P), vlan3(F)
Console#
```

Table 4-101 show ip mroute - display description

Field	Description
Source and netmask	Subnetwork containing the IP multicast source.
Group address	IP multicast group address for a requested service.
Owner	The associated multicast protocol (i.e., DVMRP or PIM-DM).
Upstream Interface	Interface leading to the upstream neighbor.
Upstream Router	IP address of the multicast router immediately upstream for this group.
Downstream interface and flags	The interface(s) on which multicast subscribers have been recorded. The flags associated with each interface indicate prune (P) if the downstream interface has been recently terminated or forwarding (F) if the interface is still active.

This example lists all entries in the multicast table in summary form:

```

Console#show ip mroute summary
IP Multicast Forwarding is enabled.

IP Multicast Routing Table (Summary)

Flags: P - Prune UP

  Group          Source          Source Mask      Interface  Owner    Flags
-----
    224.1.1.1    10.1.0.0        255.255.0.0     vlan1     DVMRP    P
    224.2.2.2    10.1.0.0        255.255.0.0     vlan1     DVMRP    --
Console#

```

DVMRP Multicast Routing Commands

Table 4-102 DVMRP Multicast Routing Commands

Command	Function	Mode	Page
router dvmrp	Enables DVMRP and enters router configuration mode	GC	4-295
probe-interval	Sets the interval for sending neighbor probe messages	RC	4-296
nbr-timeout	Sets the delay before declaring an attached neighbor router down	RC	4-297
report-interval	Sets the interval for propagating the complete set of routing tables to other neighbor routers	RC	4-297
flash-update-interval	Sets the interval for sending updates about changes to network topology	RC	4-298
prune-lifetime	Defines how long a prune state remains in effect for a source-routed multicast tree	RC	4-298
default-gateway	Configures the default gateway for IP multicast routing	RC	4-299
ip dvmrp	Enables DVMRP on the specified interface	IC	4-299
ip dvmrp metric	Sets the metric used when establishing reverse paths to some networks on directly attached interfaces	IC	4-300
clear ip dvmrp route	Clears all dynamic routes in the multicast routing table	PE	4-301
show router dvmrp	Displays global DVMRP configuration settings	NE, PE	4-301
show ip dvmrp route	Displays DVMRP routing information	NE, PE	4-302
show ip dvmrp neighbor	Displays DVMRP neighbor information	NE, PE	4-303
show ip dvmrp interface	Displays DVMRP configuration settings for the interfaces	NE, PE	4-303

router dvmrp

This command enables Distance-Vector Multicast Routing (DVMRP) globally for the router and to enter router configuration mode. Use the **no** form to disable DVMRP multicast routing.

Syntax

[no] router dvmrp

4 Command Line Interface

Command Mode

Global Configuration

Command Usage

This command enables DVMRP globally for the router and enters router configuration mode. Make any changes necessary to the global DVMRP parameters. Then specify the interfaces that will support DVMRP multicast routing using the **ip dvmrp** command, and set the metric for each interface.

Example

```
Console(config)#router dvmrp
Console(config-router)#end
Console#show router dvmrp
Admin Status           : enable
Probe Interval         : 10
Nbr expire             : 35
Minimum Flash Update Interval : 5
prune lifetime         : 7200
route report           : 60
Default Gateway        : 0.0.0.0
Metric of Default Gateway : 0
Console#
```

Related Commands

ip dvmrp (4-299)
show router dvmrp (4-301)

probe-interval

This command sets the interval for sending neighbor probe messages to the multicast group address for all DVMRP routers. Use the **no** form to restore the default value.

Syntax

probe-interval *seconds*
no probe-interval

seconds - Interval between sending neighbor probe messages.
(Range: 1-65535)

Default Setting

10 seconds

Command Mode

Router Configuration

Command Usage

Probe messages are sent to neighboring DVMRP routers from which this device has received probes, and is used to verify whether or not these neighbors are still active members of the multicast tree.

Example

```
Console(config-router)#probe-interval 30
Console(config-router)#
```

nbr-timeout

This command sets the interval to wait for messages from a DVMRP neighbor before declaring it dead. Use the **no** form to restore the default value.

Syntax

nbr-timeout *seconds*
no nbr-timeout

seconds - Interval before declaring a neighbor dead. (Range: 1-65535)

Default Setting

35 seconds

Command Mode

Router Configuration

Command Usage

This command is used for timing out routes, and for setting the children and leaf flags.

Example

```
Console(config-router)#nbr-timeout 40
Console(config-router)#
```

report-interval

This command specifies how often to propagate the complete set of routing tables to other neighbor DVMRP routers. Use the **no** form to restore the default value.

Syntax

report-interval *seconds*
no report-interval

seconds - Interval between sending the complete set of routing tables. (Range: 1-65535)

Default Setting

60 seconds

4 Command Line Interface

Command Mode

Router Configuration

Example

```
Console(config-router)#report-interval 90
Console(config-router)#
```

flash-update-interval

This command specifies how often to send trigger updates, which reflect changes in the network topology. Use the **no** form to restore the default value.

Syntax

flash-update-interval *seconds*
no flash-update-interval

seconds - Interval between sending flash updates when network topology changes have occurred. (Range: 1-65535)

Default Setting

5 seconds

Command Mode

Router Configuration

Example

```
Console(config-router)#flash-update-interval 10
Console(config-router)#
```

prune-lifetime

This command specifies how long a prune state will remain in effect for a multicast tree. Use the **no** form to restore the default value.

Syntax

prune-lifetime *seconds*
no prune-lifetime

seconds - Prune state lifetime. (Range: 1-65535)

Default Setting

7200 seconds

Command Mode

Router Configuration

Command Usage

This command sets the prune state lifetime. After the prune state expires, the router will resume flooding multicast traffic from the multicast source device.

Example

```
Console(config-router)#prune-lifetime 5000
Console(config-router)#
```

default-gateway

This command specifies the default DVMRP gateway for IP multicast traffic. Use the **no** form to remove the default gateway.

Syntax

```
default-gateway ip-address
no default-gateway
```

ip-address - IP address of the default DVMRP gateway.

Default Setting

None

Command Mode

Router Configuration

Command Usage

- The specified interface advertises itself as a default route to neighboring DVMRP routers. It advertises the default route out through its other interfaces. Neighboring routers on the other interfaces return Poison Reverse messages for the default route back to the router. When the router receives these messages, it records all the downstream routers for the default route.
- When multicast traffic with an unknown source address (i.e., not found in the route table) is received on the default upstream route interface, the router forwards this traffic out through the other interfaces (with known downstream routers). However, when multicast traffic with an unknown source address is received on another interface, the router drops it because only the default upstream interface can forward multicast traffic from an unknown source.

Example

```
Console(config-router)#default-gateway 10.1.0.253
Console(config-router)#
```

ip dvmrp

This command enables DVMRP on the specified interface. Use the **no** form to disable DVMRP on this interface.

Syntax

```
ip dvmrp
no ip dvmrp
```

4 Command Line Interface

Default Setting

Disabled

Command Mode

Interface Configuration (VLAN)

Command Usage

To fully enable DVMRP, you need to enable multicast routing globally for the router with the **ip multicast-routing** command (page 4-293), enable DVMRP globally for the router with the **router dvmrp** command (page 4-295), and also enable DVMRP for each interface that will participate in multicast routing with the **ip dvmrp** command.

Example

```
Console(config)#interface vlan 1
Console(config-if)#ip dvmrp
Console(config-if)#end
Console#show ip dvmrp interface
Vlan 1 is up
  DVMRP is enabled
  Metric is 1
Console#
```

ip dvmrp metric

This command configures the metric used in selecting the reverse path to networks connected directly to an interface on this router. Use the **no** form to restore the default value.

Syntax

```
ip dvmrp metric interface-metric
no ip dvmrp metric
```

interface-metric - Metric used to select the best reverse path.
(Range: 1-31)

Default Setting

1

Command Mode

Interface Configuration (VLAN)

Command Usage

The DVMRP interface metric is used to choose the best reverse path when there are multiple paths to the same upstream destination. The lower cost path is the preferred path.

Example

```
Console(config)#interface vlan 1
Console(config-if)#ip dvmrp metric 2
Console(config-if)#
```

clear ip dvmrp route

This command clears all dynamic routes learned by DVMRP.

Command Mode

Privileged Exec

Example

As shown below, this command clears everything from the route table except for the default route.

```
Console#clear ip dvmrp route
clear all ip dvmrp route
Console#show ip dvmrp route
```

Source	Mask	Upstream_nbr	Interface	Metric	UpTime	Expire
10.1.0.0	255.255.255.0	10.1.0.253	vlan1	1	1840	0

```
Console#
```

show router dvmrp

This command displays the global DVMRP configuration settings.

Command Mode

Normal Exec, Privileged Exec

Command Usage

This command displays the global DVMRP settings described in the preceding pages:

- Admin Status, router dvmrp, (page 4-295)
- Probe Interval (page 4-296)
- Nbr Expire (page 4-297)
- Minimum Flash Update Interval (page 4-298)
- Prune Lifetime (page 4-298)
- Route Report (page 4-297)
- Default Gateway (page 4-299)
- Metric of Default Gateway (page 4-300)

4 Command Line Interface

Example

The default settings are shown in the following example:

```
Console#show route dvmrp
Admin Status           : enable
Probe Interval         : 10
Nbr expire             : 35
Minimum Flash Update Interval : 5
prune lifetime         : 7200
route report           : 60
Default Gateway        : 0.0.0.0
Metric of Default Gateway : 1
Console#
```

show ip dvmrp route

This command displays all entries in the DVMRP routing table.

Command Mode

Normal Exec, Privileged Exec

Example

DMVPRP routes are shown in the following example:

```
Console#show ip dvmrp route

  Source           Mask           Upstream_nbr   Interface Metric  UpTime  Expire
-----
  10.1.0.0         255.255.255.0  10.1.0.253    vlan1      1   84438   0
  10.1.1.0         255.255.255.0  10.1.1.253    vlan2      1   84987   0
  10.1.8.0         255.255.255.0  10.1.0.254    vlan1      2   19729   97
Console#
```

Table 4-103 show ip dvmrp route - display description

Field	Description
Source	IP subnetwork that contains a multicast source, an upstream router, or an outgoing interface connected to multicast hosts.
Mask	Subnet mask that is used for the source address. This mask identifies the host address bits used for routing to specific subnets.
Upstream_nbr	The IP address of the network device immediately upstream for one or more multicast groups.
Interface	The IP interface on this router that connects to the upstream neighbor.
Metric	The metric for this interface used to calculate distance vectors.
UpTime	The time elapsed since this entry was created.
Expire	The time remaining before this entry will be aged out.

show ip dvmrp neighbor

This command displays all of the DVMRP neighbor routers.

Command Mode

Normal Exec, Privileged Exec

Example

```

Console#show ip dvmrp neighbor

      Address          Interface    Uptime    Expire    Capabilities
-----
      10.1.0.254      vlan1      79315     32        6
Console#

```

Table 4-104 show ip dvmrp neighbor - display description

Field	Description
Address	The IP address of the network device immediately upstream for this multicast delivery tree.
Interface	The IP interface on this router that connects to the upstream neighbor.
Uptime	The time since this device last became a DVMRP neighbor.
Expire	The time remaining before this entry will be aged out.
Capabilities	The neighboring router's capabilities may include: Leaf (bit 0) - Neighbor has only one interface with neighbors. Prune (bit 1) - Neighbor supports pruning. Generation ID (bit 2) - Neighbor sends its Generation ID in probe messages. Mtrace (bit 3) - Neighbor can handle multicast trace requests. SNMP (bit 4) - Neighbor is SNMP capable. Netmask - (bit 5) - Neighbor will accept network masks appended to the prune, graft, and graft acknowledgement messages. Reserved (bit 6 and 7) - Reserved for future use.

show ip dvmrp interface

This command displays the DVMRP configuration for interfaces which have enabled DVMRP.

Command Mode

Normal Exec, Privileged Exec

Example

```

Console#show ip dvmrp interface
Vlan 1 is up
  DVMRP is enabled
  Metric is 1
Console#

```

PIM-DM Multicast Routing Commands

Table 4-105 PIM-DM Multicast Routing Commands

Command	Function	Mode	Page
router pim	Enables PIM globally for the router	GC	4-304
ip pim dense-mode	Enables PIM on the specified interface	IC	4-305
ip pim hello-interval	Sets the interval between sending PIM hello messages	IC	4-306
ip pim hello-holdtime	Sets the time to wait for hello messages from a neighboring PIM router before declaring it dead	IC	4-306
ip pim trigger-hello-interval	Sets the maximum time before sending a triggered PIM Hello message	IC	4-307
ip pim join-prune-holdtime	Configures the hold time for the prune state	IC	4-307
ip pim graft-retry-interval	Configures the time to wait for a Graft acknowledgement before resending a Graft message	IC	4-308
ip pim max-graft-retries	Configures the maximum number of times to resend a Graft message if it has not been acknowledged	IC	4-309
show router pim	Displays the global PIM configuration settings	NE, PE	4-309
show ip pim interface	Displays information about interfaces configured for PIM	NE, PE	4-309
show ip pim neighbor	Displays information about PIM neighbors	NE, PE	4-310

router pim

This command enables Protocol-Independent Multicast - Dense Mode (PIM-DM) globally for the router and to enter router configuration mode. Use the **no** form to disable PIM-DM multicast routing.

Syntax

[no] router pim

Default Setting

Disabled

Command Mode

Global Configuration

Command Usage

This command enables PIM-DM globally for the router. You also need to enable PIM-DM for each interface that will support multicast routing using the **ip pim dense-mode** command (page 4-305), and make any changes necessary to the multicast protocol parameters.

Example

```
Console(config)#router pim
Console#show router pim
Admin Status: Enabled
Console#
```

ip pim dense-mode

This command enables PIM-DM on the specified interface. Use the **no** form to disable PIM-DM on this interface.

Syntax

[no] ip pim dense-mode

Default Setting

Disabled

Command Mode

Interface Configuration (VLAN)

Command Usage

- To fully enable PIM-DM, you need to enable multicast routing globally for the router with the **ip multicast-routing** command (page 4-293), enable PIM-DM globally for the router with the **router pim** command (page 4-304), and also enable PIM-DM for each interface that will participate in multicast routing with the **ip pim dense-mode** command.
- If you enable PIM on an interface, you should also enable IGMP on that interface.
- Dense-mode interfaces are subject to multicast flooding by default, and are only removed from the multicast routing table when the router determines that there are no group members or downstream routers, or when a prune message is received from a downstream router.

Example

```
Console(config)#interface vlan 1
Console(config-if)#ip pim dense-mode
Console#show ip pim interface
Vlan 1 is up
PIM is enabled, mode is Dense.
Internet address is 10.1.0.253.
Hello time interval is 30 sec, trigger hello time interval is 5 sec.
Hello holdtime is 105 sec.
Join/Prune holdtime is 210 sec.
Graft retry interval is 3 sec, max graft retries is 2.
DR Internet address is 10.1.0.253, neighbor count is 0.
Console#
```

4 Command Line Interface

ip pim hello-interval

This command configures the frequency at which PIM hello messages are transmitted. Use the **no** form to restore the default value.

Syntax

```
ip pim hello-interval seconds  
no pim hello-interval
```

seconds - Interval between sending PIM hello messages.
(Range: 1-65535)

Default Setting

30 seconds

Command Mode

Interface Configuration (VLAN)

Command Usage

Hello messages are sent to neighboring PIM routers from which this device has received probes, and are used to verify whether or not these neighbors are still active members of the multicast tree.

Example

```
Console(config-if)#ip pim hello-interval 60  
Console(config-if)#
```

ip pim hello-holdtime

This command configures the interval to wait for hello messages from a neighboring PIM router before declaring it dead. Use the **no** form to restore the default value.

Syntax

```
ip pim hello-holdtime seconds  
no ip pim hello-interval
```

seconds - The hold time for PIM hello messages. (Range: 1-65535)

Default Setting

105 seconds

Command Mode

Interface Configuration (VLAN)

Command Usage

The **ip pim hello-holdtime** should be 3.5 times the value of **ip pim hello-interval** (page 4-306).

Example

```
Console(config-if)#ip pim hello-holdtime 210
Console(config-if)#
```

ip pim trigger-hello-interval

This command configures the maximum time before transmitting a triggered PIM Hello message after the router is rebooted or PIM is enabled on an interface. Use the **no** form to restore the default value.

Syntax

```
ip pim triggerr-hello-interval seconds
no ip pim triggerr-hello-interval
```

seconds - The maximum time before sending a triggered PIM Hello message. (Range: 0-65535)

Default Setting

5 seconds

Command Mode

Interface Configuration (VLAN)

Command Usage

- When a router first starts or PIM is enabled on an interface, the hello-interval is set to random value between 0 and the trigger-hello-interval. This prevents synchronization of Hello messages on multi-access links if multiple routers are powered on simultaneously.
- Also, if a Hello message is received from a new neighbor, the receiving router will send its own Hello message after a random delay between 0 and the trigger-hello-interval.

Example

```
Console(config-if)#ip pim triggerr-hello-interval 10
Console(config-if)#
```

ip pim join-prune-holdtime

This command configures of the hold time for the prune state. Use the **no** form to restore the default value.

Syntax

```
ip pim join-prune-holdtime seconds
no ip pim join-prune-holdtime
```

seconds - The hold time for the prune state. (Range: 0-65535)

4 Command Line Interface

Default Setting

210 seconds

Command Mode

Interface Configuration (VLAN)

Command Usage

The multicast interface that first receives a multicast stream from a particular source forwards this traffic to all other PIM interfaces on the router. If there are no requesting groups on that interface, the leaf node sends a prune message upstream and enters a prune state for this multicast stream. The prune state is maintained until the join-prune-holdtime timer expires or a graft message is received for the forwarding entry.

Example

```
Console(config-if)#ip pim join-prune-holdtime 60
Console(config-if)#
```

ip pim graft-retry-interval

This command configures the time to wait for a Graft acknowledgement before resending a Graft. Use the **no** form to restore the default value.

Syntax

```
ip pim graft-retry-interval seconds
no ip pim graft-retry-interval
```

seconds - The time before resending a Graft. (Range: 0-65535)

Default Setting

3 seconds

Command Mode

Interface Configuration (VLAN)

Command Usage

A graft message is sent by a router to cancel a prune state. When a router receives a graft message, it must respond with an graft acknowledgement message. If this acknowledgement message is lost, the router that sent the graft message will resend it a number of times (as defined by the **ip pim max-graft-retries** command).

Example

```
Console(config-if)#ip pim graft-retry-interval 9
Console(config-if)#
```


ip pim max-graft-retries

This command configures the maximum number of times to resend a Graft message if it has not been acknowledged. Use the **no** form to restore the default value.

Syntax

```
ip pim max-graft-retries retries  
no ip pim graft-retry-interval
```

retries - The maximum number of times to resend a Graft.
(Range: 0-65535)

Default Setting

2

Command Mode

Interface Configuration (VLAN)

Example

```
Console(config-if)#ip pim max-graft-retries 5  
Console(config-if)#
```

show router pim

This command displays the global PIM configuration settings.

Command Mode

Normal Exec, Privileged Exec

Example

```
Console#show router pim  
Admin Status: Enabled  
Console#
```

show ip pim interface

This command displays information about interfaces configured for PIM.

Syntax

```
show ip pim interface vlan-id  
vlan-id - VLAN ID (Range: 1-4094)
```

Command Mode

Normal Exec, Privileged Exec

Command Usage

This command displays the PIM settings for the specified interface as described in the preceding pages. It also shows the address of the designated PIM router and the number of neighboring PIM routers.

4 Command Line Interface

Example

```
Console#show ip pim interface 1
Vlan 1 is up
PIM is enabled, mode is Dense.
Internet address is 10.1.0.253.
Hello time interval is 30 sec, trigger hello time interval is 5 sec.
Hello holdtime is 105 sec.
Join/Prune holdtime is 210 sec.
Graft retry interval is 3 sec, max graft retries is 2.
DR Internet address is 10.1.0.254, neighbor count is 1.

Console#
```

show ip pim neighbor

This command displays information about PIM neighbors.

Syntax

```
show ip pim neighbor [ip-address]
```

ip-address - IP address of a PIM neighbor.

Default Setting

Displays information for all known PIM neighbors.

Command Mode

Normal Exec, Privileged Exec

Example

```
Console#show ip pim neighbor
  Address      VLAN Interface  Uptime    Expire    Mode
-----
  10.1.0.254   1             17:38:16  00:01:25  Dense
Console#
```

Table 4-106 show ip pim neighbor - display description

Field	Description
Address	IP address of the next-hop router.
VLAN Interface	Interface number that is attached to this neighbor.
Uptime	The duration this entry has been active.
Expire	The time before this entry will be removed.
Mode	PIM mode used on this interface. (Only Dense Mode is supported.)

Router Redundancy Commands

Router redundancy protocols use a virtual IP address to support a primary router and multiple backup routers. The backup routers can be configured to take over the workload if the master router fails, or can also be configured to share the traffic load. The primary goal of router redundancy is to allow a host device which has been configured with a fixed gateway to maintain network connectivity in case the primary gateway goes down.

Table 4-107 Router Redundancy Commands

Command Groups	Function	Page
Virtual Router Redundancy Protocol	Configures interface settings for VRRP	4-311

Virtual Router Redundancy Protocol Commands

To configure VRRP, select an interface on one router in the group to serve as the master virtual router. This physical interface is used as the virtual address for the router group. Now set the same virtual address and a priority on the backup routers, and configure an authentication string. You can also enable the preempt feature which allows a router to take over as the master router when it comes on line.

Table 4-108 VRRP Commands

Command	Function	Mode	Page
vrp ip	Enables VRRP and sets the IP address of the virtual router	IC	4-312
vrp authentication key	Configures a key used to authenticate VRRP packets received from other routers	IC	4-313
vrp priority	Sets the priority of this router in the VRRP group	IC	4-313
vrp timers advertise	Sets the interval between successive advertisements by the master virtual router	IC	4-314
vrp preempt	Configures the router to take over as master virtual router for a VRRP group if it has a higher priority than the current master virtual router	IC	4-315
show vrrp	Displays VRRP status information	PE	4-316
show vrrp interface	Displays VRRP status information for the specified interface	PE	4-318
show vrrp router counters	Displays VRRP statistics	PE	4-318
show vrrp interface counters	Displays VRRP statistics for the specified interface	PE	4-319
clear vrrp router counters	Clears VRRP router statistics	PE	4-319
clear vrrp interface counters	Clears VRRP interface statistics	PE	4-319

4 Command Line Interface

vrrp ip

This command enables the Virtual Router Redundancy Protocol (VRRP) on an interface and specify the IP address of the virtual router. Use the **no** form to disable VRRP on an interface and remove the IP address from the virtual router.

Syntax

[no] vrrp group ip *ip-address* [secondary]

- *group* - Identifies the virtual router group. (Range: 1-255)
- *ip-address* - The IP address of the virtual router.
- **secondary** - Specifies additional secondary IP addresses assigned to the current VLAN interface that are supported by this VRRP group.

Default Setting

No virtual router groups are configured.

Command Mode

Interface (VLAN)

Command Usage

- The interfaces of all routers participating in a virtual router group must be within the same IP subnet.
- The IP address assigned to the virtual router must already be configured on the router that will be the Owner. In other words, the IP address specified in this command must already exist on one, and only one, router in the virtual router group, and the network mask for the virtual router address is derived from the Owner. The Owner will also assume the role of the Master virtual router in the group.
- If you have multiple secondary addresses configured on the current VLAN interface, you can use this command with the **secondary** keyword to add any secondary address that will be supported by the virtual router.
- VRRP is enabled as soon as this command is entered. If you need to customize any of the other parameters for VRRP such as authentication, priority, or advertisement interval, then first configure these parameters before enabling VRRP.

Example

This example creates VRRP group 1 using the primary interface for VLAN 1 as the VRRP group Owner, and also adds a secondary interface as a member of the group.

```
Console(config)#interface vlan 1
Console(config-if)#vrrp 1 ip 192.168.1.6
Console(config-if)#vrrp 1 ip 192.168.2.6 secondary
Console(config-if)#
```

vrrp authentication

This command specifies the key used to authenticate VRRP packets received from other routers. Use the **no** form to prevent authentication.

Syntax

vrrp group authentication key
no vrrp group authentication

- *group* - Identifies the virtual router group. (Range: 1-255)
- *key* - Authentication string. (Range: 1-8 alphanumeric characters)

Default Setting

No key is defined.

Command Mode

Interface (VLAN)

Command Usage

- All routers in the same VRRP group must be configured with the same authentication key.
- When a VRRP packet is received from another router in the group, its authentication key is compared to the string configured on this router. If the keys match, the message is accepted. Otherwise, the packet is discarded.
- Plain text authentication does not provide any real security. It is supported only to prevent a misconfigured router from participating in VRRP.

Example

```
Console(config-if)#vrrp 1 authentication bluebird  
Console(config-if)#
```

vrrp priority

This command sets the priority of this router in a VRRP group. Use the **no** form to restore the default setting.

Syntax

vrrp group priority level
no vrrp group priority

- *group* - Identifies the VRRP group. (Range: 1-255)
- *level* - Priority of this router in the VRRP group. (Range: 1-254)

Default Setting

100

Command Mode

Interface (VLAN)

4 Command Line Interface

Command Usage

- A router that has a physical interface with the same IP address as that used for the virtual router will become the master virtual router. The backup router with the highest priority will become the master router if the current master fails. When the original master router recovers, it will take over as the active master router again.
- If two or more routers are configured with the same VRRP priority, the router with the higher IP address is elected as the new master router if the current master fails.
- If the backup preempt function is enabled with the **vrrp preempt** command, and a backup router with a priority higher than the current acting master comes on line, this backup router will take over as the new acting master. However, note that if the original master (i.e., the owner of the VRRP IP address) comes back on line, it will always resume control as the master.

Example

```
Console(config-if)#vrrp 1 priority 1
Console(config-if)#
```

Related Commands

vrrp preempt (4-315)

vrrp timers advertise

This command sets the interval at which the master virtual router sends advertisements communicating its state as the master. Use the **no** form to restore the default interval.

Syntax

```
vrrp group timers advertise interval
no vrrp group timers advertise
```

- *group* - Identifies the VRRP group. (Range: 1-255)
- *interval* - Advertisement interval for the master virtual router. (Range: 1-255 seconds)

Default Setting

1 second

Command Mode

Interface (VLAN)

Command Usage

- VRRP advertisements from the current master virtual router include information about its priority and current state as the master.

- VRRP advertisements are sent to the multicast address 224.0.0.8. Using a multicast address reduces the amount of traffic that has to be processed by network devices that are not part of the designated VRRP group.
- If the master router stops sending advertisements, backup routers will bid to become the master router based on priority. The dead interval before attempting to take over as the master is three times the hello interval plus half a second

Example

```
Console(config-if)#vrrp 1 timers advertise 5
Console(config-if)#
```

vrrp preempt

This command configures the router to take over as the master virtual router for a VRRP group if it has a higher priority than the current acting master router. Use the **no** form to disable preemption.

Syntax

```
vrrp group preempt [delay seconds]
no vrrp group preempt
```

- *group* - Identifies the VRRP group. (Range: 1-255)
- *seconds* - The time to wait before issuing a claim to become the master. (Range: 0-120 seconds)

Default Setting

Preempt: Enabled
Delay: 0 seconds

Command Mode

Interface (VLAN)

Command Usage

- If preempt is enabled, and this backup router has a priority higher than the current acting master, it will take over as the new master. However, note that if the original master (i.e., the owner of the VRRP IP address) comes back on line, it will always resume control as the master.
- The delay can give additional time to receive an advertisement message from the current master before taking control. If the router attempting to become the master has just come on line, this delay also gives it time to gather information for its routing table before actually preempting the currently active router.

Example

```
Console(config-if)#vrrp 1 preempt delay 10
Console(config-if)#
```

Related Commands

vrrp priority (4-313)

show vrrp

This command displays status information for VRRP.

Syntax

show vrrp [**brief** | *group*]

- **brief** - Displays summary information for all VRRP groups on this router.
- *group* - Identifies a VRRP group. (Range: 1-255)

Defaults

None

Command Mode

Privileged Exec

Command Usage

- Use this command without any keywords to display the full listing of status information for all VRRP groups configured on this router.
- Use this command with the **brief** keyword to display a summary of status information for all VRRP groups configured on this router.
- Specify a group number to display status information for a specific group

Example

This example displays the full listing of status information for all groups.

```
Console#show vrrp
Vlan 1 - Group 1,
state                               Master
Virtual IP address                   192.168.1.6
Virtual MAC address                  00-00-5E-00-01-01
Advertisement interval                5 sec
Preemption                           enabled
Min delay                             10 sec
Priority                               1
Authentication                       SimpleText
Authentication key                   bluebird
Master Router                        192.168.1.6
Master priority                       255
Master Advertisement interval        5 sec
Master down interval                 15
Console#
```


Table 4-109 show vrrp - display description

Field	Description
State	VRRP role of this interface (master or backup)
Virtual IP address	Virtual address that identifies this VRRP group
Virtual MAC address	Virtual MAC address derived from the owner of the virtual IP address
Advertisement interval	Interval at which the master virtual router advertises its role as the master
Preemption	Shows whether or not a higher priority router can preempt the current acting master
Min delay	Delay before a router with a higher priority can preempt the current acting master
Priority	Priority of this router
Authentication	Authentication mode used to verify VRRP packets
Authentication key	Key used to authenticate VRRP packets received from other routers
Master Router	IP address of the router currently acting as the VRRP group master
Master priority	The priority of the router currently acting as the VRRP group master
Master Advertisement interval	The advertisement interval configured on the VRRP master.
Master down interval	The down interval configured on the VRRP master (This interval is used by all the routers in the group regardless of their local settings)

This example displays the brief listing of status information for all groups.

```

Console#show vrrp brief
Interface  Grp    State   Virtual addr   Int   Pre   Prio
-----
vlan 1    1      Master  192.168.1.6   5     E     1
Console#

```

Table 4-110 show vrrp brief - display description

Field	Description
Interface	VLAN interface
Grp	VRRP group
State	VRRP role of this interface (master or backup)
Virtual addr	Virtual address that identifies this VRRP group
Int	Interval at which the master virtual router advertises its role as the master
Pre	Shows whether or not a higher priority router can preempt the current acting master
Prio	Priority of this router

4 Command Line Interface

show vrrp interface

This command displays status information for the specified VRRP interface.

Syntax

show vrrp interface vlan *vlan-id* [**brief**]

- *vlan-id* - Identifier of configured VLAN interface. (Range: 1-4094)
- **brief** - Displays summary information for all VRRP groups on this router.

Defaults

None

Command Mode

Privileged Exec

Example

This example displays the full listing of status information for VLAN 1.

```
Console#show vrrp interface vlan 1
Vlan 1 - Group 1,
state                               Master
Virtual IP address                  192.168.1.6
Virtual MAC address                 00-00-5E-00-01-01
Advertisement interval               5 sec
Preemption                          enabled
Min delay                           10 sec
Priority                             1
Authentication                      SimpleText
Authentication key                  bluebird
Master Router                       192.168.1.6
Master priority                     1
Master Advertisement interval       5 sec
Master down interval               15
Console#
```

* Refer to “show vrrp” on page 4-316 for a description of the display items.

show vrrp router counters

This command displays counters for errors found in VRRP protocol packets.

Command Mode

Privileged Exec

Example

Note that unknown errors indicate VRRP packets received with an unknown or unsupported version number.

```
Console#show vrrp router counters
Total Number of VRRP Packets with Invalid Checksum : 0
Total Number of VRRP Packets with Unknown Error   : 0
Total Number of VRRP Packets with Invalid VRID    : 0
Console#
```

show vrrp interface counters

This command displays counters for VRRP protocol events and errors that have occurred for the specified group and interface.

show vrrp *group* interface *vlan interface* counters

- *group* - Identifies a VRRP group. (Range: 1-255)
- *interface* - Identifier of configured VLAN interface. (Range: 1-4094)

Defaults

None

Command Mode

Privileged Exec

Example

```
Console#show vrrp 1 interface vlan 1 counters
Total Number of Times Transitioned to MASTER           : 6
Total Number of Received Advertisements Packets       : 0
Total Number of Received Error Advertisement Interval Packets : 0
Total Number of Received Authentication Failures Packets : 0
Total Number of Received Error IP TTL VRRP Packets    : 0
Total Number of Received Priority 0 VRRP Packets      : 0
Total Number of Sent Priority 0 VRRP Packets          : 5
Total Number of Received Invalid Type VRRP Packets   : 0
Total Number of Received Error Address List VRRP Packets : 0
Total Number of Received Invalid Authentication Type VRRP Packets : 0
Total Number of Received Mismatch Authentication Type VRRP Packets : 0
Total Number of Received Error Packet Length VRRP Packets : 0
Console#
```

* Refer to “Displaying VRRP Group Statistics” on page 3-180 for a description of the display items.

clear vrrp router counters

This command clears VRRP system statistics.

Command Mode

Privileged Exec

Example

```
Console#clear vrrp router counters
Console#
```

clear vrrp interface counters

This command clears VRRP system statistics for the specified group and interface.

clear vrrp *group* interface *interface* counters

- *group* - Identifies a VRRP group. (Range: 1-255)
- *interface* - Identifier of configured VLAN interface. (Range: 1-4094)

4 Command Line Interface

Defaults

None

Command Mode

Privileged Exec

Example

```
Console#clear vrrp 1 interface 1 counters  
Console#
```

Appendix A: Software Specifications

Software Features

Authentication

Local, RADIUS, TACACS, Port (802.1x), HTTPS, SSH, Port Security

Access Control Lists

IP, MAC (up to 32 lists)

DHCP Client, Relay, Server

DNS Server

Port Configuration

1000BASE-T: 10/100 Mbps at half/full duplex, 1000 Mbps at full duplex

1000BASE-SX/LX/LH - 1000 Mbps at full duplex (SFP),

Flow Control

Full Duplex: IEEE 802.3x

Half Duplex: Back pressure

Broadcast Storm Control

Traffic throttled above a critical threshold

Port Mirroring

Multiple source ports, one destination port

Rate Limits

Input Limit

Output limit

Range (configured per port)

Port Trunking

Static trunks (Cisco EtherChannel compliant)

Dynamic trunks (Link Aggregation Control Protocol)

Spanning Tree Protocol

Spanning Tree Protocol (STP, IEEE 802.1D)

Rapid Spanning Tree Protocol (RSTP, IEEE 802.1w)

Multiple Spanning Tree Protocol (MSTP, IEEE 802.1s)

VLAN Support

Up to 255 groups; port-based, protocol-based, or tagged (802.1Q),

GVRP for automatic VLAN learning, private VLANs

Class of Service

Supports eight levels of priority and Weighted Round Robin Queueing (which can be configured by VLAN tag or port),

Layer 3/4 priority mapping: IP Port, IP Precedence, IP DSCP

Multicast Filtering

IGMP Snooping (Layer 2)

IGMP (Layer 3)



Multicast Routing
DVMRP, PIM-DM

IP Routing
ARP, Proxy ARP
Static routes
RIP, RIPv2 and OSPFv2 dynamic routing
VRRP (Virtual Router Redundancy Protocol)

Additional Features
BOOTP client
CIDR (Classless Inter-Domain Routing)
SNTP (Simple Network Time Protocol)
SNMP (Simple Network Management Protocol)
RMON (Remote Monitoring, groups 1,2,3,9)
SMTP Email Alerts

Management Features

In-Band Management
Telnet, web-based HTTP or HTTPS, SNMP manager, or Secure Shell

Out-of-Band Management
RS-232 DB-9 console port

Software Loading
TFTP in-band or XModem out-of-band

SNMP
Management access via MIB database
Trap management to specified hosts

RMON
Groups 1, 2, 3, 9 (Statistics, History, Alarm, Event)

Standards

IEEE 802.1D Spanning Tree Protocol and traffic priorities
IEEE 802.1p Priority tags
IEEE 802.1Q VLAN
IEEE 802.1v Protocol-based VLANs
IEEE 802.1s Multiple Spanning Tree Protocol
IEEE 802.1w Rapid Spanning Tree Protocol
IEEE 802.1X Port Authentication
IEEE 802.3-2002
Ethernet, Fast Ethernet, Gigabit Ethernet
Link Aggregation Control Protocol (LACP)
Full-duplex flow control
IEEE 802.3ac VLAN tagging
ARP (RFC 826)

DHCP Client (RFC 1541)
DHCP Relay (RFC 951)
DHCP Server (RFC 2131)
DVMRP (RFC 1075)
HTTPS
ICMP (RFC 792)
IGMP (RFC 1112)
IGMPv2 (RFC 2236)
OSPF (RFC 2328, 1587)
PIM-DM (draft-ietf-idmr-pim-dm-06)
RADIUS+ (RFC 2618)
RIP (RFC 1058)
RIPv2 (RFC 2453)
RMON (RFC 1757 groups 1,2,3,9)
SNMP (RFC 1157)
SNMPv2c (RFC 2571)
SNMPv3 (RFC RAFT 3414, 2570, 2273, 3411, 3415)
SNTP (RFC 2030)
SSH (Version 2.0)
TFTP (RFC 1350)
VRRP (RFC 2338)

Management Information Bases

Bridge MIB (RFC 1493)
DNS Resolver MIB (RFC 1612)
DVMRP MIB
Entity MIB (RFC 2737)
Ether-like MIB (RFC 2665)
Extended Bridge MIB (RFC 2674)
Extensible SNMP Agents MIB (RFC 2742)
IP Forwarding Table MIB (RFC 2096)
IGMP MIB (RFC 2933)
Interface Group MIB (RFC 2233)
Interfaces Evolution MIB (RFC 2863)
IP Multicasting related MIBs
MAU MIB (RFC 2668)
MIB II (RFC 1213)
OSPF MIB (RFC 1850)
PIM MIB (RFC 2934)
Port Access Entity MIB (IEEE 802.1X)
Private MIB
RADIUS Authentication Client MIB (RFC 2621)
RIP1 MIB (RFC 1058)
RIP2 MIB (RFC 2453)
RMON MIB (RFC 2819)



RMON II Probe Configuration Group (RFC 2021, partial implementation)
SNMPv2 IP MIB (RFC 2011)
SNMP framework MIB (RFC 3411)
SNMP-MPD MIB (RFC 3412)
SNMP Target MIB, SNMP Notification MIB (RFC 3413)
SNMP User-Based SM MIB (RFC 3414)
SNMP View Based ACM MIB (RFC 3415)
SNMP Community MIB (RFC 2576)
TACACS+ Authentication Client MIB
TCP MIB (RFC 2013)
Trap (RFC 1215)
UDP MIB (RFC 2012)
VRRP MIB (RFC 2787)

Appendix B: Troubleshooting

Problems Accessing the Management Interface

Table B-1 Troubleshooting Chart

Symptom	Action
Cannot connect using Telnet, web browser, or SNMP software	<ul style="list-style-type: none">• Be sure the switch is powered up.• Check network cabling between the management station and the switch.• Check that you have a valid network connection to the switch and that the port you are using has not been disabled.• Be sure you have configured the VLAN interface through which the management station is connected with a valid IP address, subnet mask and default gateway.• Be sure the management station has an IP address in the same subnet as the switch's IP interface to which it is connected.• If you are trying to connect to the switch via the IP address for a tagged VLAN group, your management station, and the ports connecting intermediate switches in the network, must be configured with the appropriate tag.• If you cannot connect using Telnet, you may have exceeded the maximum number of concurrent Telnet/SSH sessions permitted. Try connecting again at a later time.
Cannot connect using Secure Shell	<ul style="list-style-type: none">• If you cannot connect using SSH, you may have exceeded the maximum number of concurrent Telnet/SSH sessions permitted. Try connecting again at a later time.• Be sure the control parameters for the SSH server are properly configured on the switch, and that the SSH client software is properly configured on the management station.• Be sure you have generated a public key on the switch, and exported this key to the SSH client.• Be sure you have set up an account on the switch for each SSH user, including user name, authentication level, and password.• Be sure you have imported the client's public key to the switch (if public key authentication is used).
Cannot access the on-board configuration program via a serial port connection	<ul style="list-style-type: none">• Be sure you have set the terminal emulator program to VT100 compatible, 8 data bits, 1 stop bit, no parity, and 9600 baud.• Check that the null-modem serial cable conforms to the pin-out connections provided in the Installation Guide.
Forgot or lost the password	<ul style="list-style-type: none">• Contact your local distributor.

Using System Logs

If a fault does occur, refer to the Installation Guide to ensure that the problem you encountered is actually caused by the switch. If the problem appears to be caused by the switch, follow these steps:

1. Enable logging.
2. Set the error messages reported to include all categories.
3. Designate the SNMP host that is to receive the error messages.
4. Repeat the sequence of commands or other actions that lead up to the error.
5. Make a list of the commands or circumstances that led to the fault. Also make a list of any error messages displayed.
6. Contact your distributor's service engineer.

For example:

```
Console(config)#logging on
Console(config)#logging history flash 7
Console(config)#snmp-server host 192.168.1.23
:
```

Glossary

Access Control List (ACL)

ACLs can limit network traffic and restrict access to certain users or devices by checking each packet for certain IP or MAC (i.e., Layer 2) information.

Address Resolution Protocol (ARP)

ARP converts between IP addresses and MAC (i.e., hardware) addresses. ARP is used to locate the MAC address corresponding to a given IP address. This allows the switch to use IP addresses for routing decisions and the corresponding MAC addresses to forward packets from one hop to the next.

Boot Protocol (BOOTP)

BOOTP is used to provide bootup information for network devices, including IP address information, the address of the TFTP server that contains the devices system files, and the name of the boot file.

Class of Service (CoS)

CoS is supported by prioritizing packets based on the required level of service, and then placing them in the appropriate output queue. Data is transmitted from the queues using weighted round-robin service to enforce priority service and prevent blockage of lower-level queues. Priority may be set according to the port default, the packet's priority bit (in the VLAN tag), TCP/UDP port number, IP Precedence bit, or DSCP priority bit.

Differentiated Services Code Point Service (DSCP)

DSCP uses a six-bit tag to provide for up to 64 different forwarding behaviors. Based on network policies, different kinds of traffic can be marked for different kinds of forwarding. The DSCP bits are mapped to the Class of Service categories, and then into the output queues.

Domain Name Service (DNS)

A system used for translating host names for network nodes into IP addresses.

Distance Vector Multicast Routing Protocol (DVMRP)

A distance-vector-style routing protocol used for routing multicast datagrams through the Internet. DVMRP combines many of the features of RIP with Reverse Path Forwarding (RPF).

Dynamic Host Control Protocol (DHCP)

Provides a framework for passing configuration information to hosts on a TCP/IP network. DHCP is based on the Bootstrap Protocol (BOOTP), adding the capability

of automatic allocation of reusable network addresses and additional configuration options.

Extensible Authentication Protocol over LAN (EAPOL)

EAPOL is a client authentication protocol used by this switch to verify the network access rights for any device that is plugged into the switch. A user name and password is requested by the switch, and then passed to an authentication server (e.g., RADIUS) for verification. EAPOL is implemented as part of the IEEE 802.1x Port Authentication standard.

GARP VLAN Registration Protocol (GVRP)

Defines a way for switches to exchange VLAN information in order to register necessary VLAN members on ports along the Spanning Tree so that VLANs defined in each switch can work automatically over a Spanning Tree network.

Generic Attribute Registration Protocol (GARP)

GARP is a protocol that can be used by endstations and switches to register and propagate multicast group membership information in a switched environment so that multicast data frames are propagated only to those parts of a switched LAN containing registered endstations. Formerly called Group Address Registration Protocol.

Generic Multicast Registration Protocol (GMRP)

GMRP allows network devices to register end stations with multicast groups. GMRP requires that any participating network devices or end stations comply with the IEEE 802.1p standard.

Group Attribute Registration Protocol (GARP)

See Generic Attribute Registration Protocol.

IEEE 802.1D

Specifies a general method for the operation of MAC bridges, including the Spanning Tree Protocol.

IEEE 802.1Q

VLAN Tagging—Defines Ethernet frame tags which carry VLAN information. It allows switches to assign endstations to different virtual LANs, and defines a standard way for VLANs to communicate across switched networks.

IEEE 802.1p

An IEEE standard for providing quality of service (QoS) in Ethernet networks. The standard uses packet tags that define up to eight traffic classes and allows switches to transmit packets based on the tagged priority value.

IEEE 802.1s

An IEEE standard for the Multiple Spanning Tree Protocol (MSTP) which provides independent spanning trees for VLAN groups.

IEEE 802.1X

Port Authentication controls access to the switch ports by requiring users to first enter a user ID and password for authentication.

IEEE 802.3ac

Defines frame extensions for VLAN tagging.

IEEE 802.3x

Defines Ethernet frame start/stop requests and timers used for flow control on full-duplex links. (Now incorporated in IEEE 802.3-2002.)

IGMP Snooping

Listening to IGMP Query and IGMP Report packets transferred between IP Multicast Routers and IP Multicast host groups to identify IP Multicast group members.

IGMP Query

On each subnetwork, one IGMP-capable device will act as the querier — that is, the device that asks all hosts to report on the IP multicast groups they wish to join or to which they already belong. The elected querier will be the device with the lowest IP address in the subnetwork.

Internet Control Message Protocol (ICMP)

A network layer protocol that reports errors in processing IP packets. ICMP is also used by routers to feed back information about better routing choices.

Internet Group Management Protocol (IGMP)

A protocol through which hosts can register with their local router for multicast services. If there is more than one multicast switch/router on a given subnetwork, one of the devices is made the “querier” and assumes responsibility for keeping track of group membership.

In-Band Management

Management of the network from a station attached directly to the network.

IP Multicast Filtering

A process whereby this switch can pass multicast traffic along to participating hosts.

IP Precedence

The Type of Service (ToS) octet in the IPv4 header includes three precedence bits defining eight different priority levels ranging from highest priority for network control

packets to lowest priority for routine traffic. The eight values are mapped one-to-one to the Class of Service categories by default, but may be configured differently to suit the requirements for specific network applications.

Layer 2

Data Link layer in the ISO 7-Layer Data Communications Protocol. This is related directly to the hardware interface for network devices and passes on traffic based on MAC addresses.

Layer 3

Network layer in the ISO 7-Layer Data Communications Protocol. This layer handles the routing functions for data moving from one open system to another.

Link Aggregation

See Port Trunk.

Link Aggregation Control Protocol (LACP)

Allows ports to automatically negotiate a trunked link with LACP-configured ports on another device.

Management Information Base (MIB)

An acronym for Management Information Base. It is a set of database objects that contains information about a specific device.

MD5 Message-Digest Algorithm

An algorithm that is used to create digital signatures. It is intended for use with 32 bit machines and is safer than the MD4 algorithm, which has been broken. MD5 is a one-way hash function, meaning that it takes a message and converts it into a fixed string of digits, also called a message digest.

Multicast Switching

A process whereby the switch filters incoming multicast frames for services for which no attached host has registered, or forwards them to all ports contained within the designated multicast VLAN group.

Network Time Protocol (NTP)

NTP provides the mechanisms to synchronize time across the network. The time servers operate in a hierarchical-master-slave configuration in order to synchronize local clocks within the subnet and to national time standards via wire or radio.

Open Shortest Path First (OSPF)

OSPF is a link-state routing protocol that functions better over a larger network such as the Internet, as opposed to distance-vector routing protocols such as RIP. It

includes features such as unlimited hop count, authentication of routing updates, and Variable Length Subnet Masks (VLSM).

Out-of-Band Management

Management of the network from a station not attached to the network.

Port Authentication

See *IEEE 802.1X*.

Port Mirroring

A method whereby data on a target port is mirrored to a monitor port for troubleshooting with a logic analyzer or RMON probe. This allows data on the target port to be studied unobstructively.

Port Trunk

Defines a network link aggregation and trunking method which specifies how to create a single high-speed logical link that combines several lower-speed physical links.

Private VLANs

Private VLANs provide port-based security and isolation between ports within the assigned VLAN. Data traffic on downlink ports can only be forwarded to, and from, uplink ports.

Protocol-Independent Multicasting (PIM)

This multicast routing protocol floods multicast traffic downstream, and calculates the shortest-path back to the multicast source network via reverse path forwarding. PIM uses the router's IP routing table rather than maintaining a separate multicast routing table as with DVMRP. PIM - Sparse Mode is designed for networks where the probability of a multicast client is low, such as on a Wide Area Network. PIM - Dense Mode is designed for networks where the probability of a multicast client is high and frequent flooding of multicast traffic can be justified.

Remote Authentication Dial-in User Service (RADIUS)

RADIUS is a logon authentication protocol that uses software running on a central server to control access to RADIUS-compliant devices on the network.

Remote Monitoring (RMON)

RMON provides comprehensive network monitoring capabilities. It eliminates the polling required in standard SNMP, and can set alarms on a variety of traffic conditions, including specific error types.

Rapid Spanning Tree Protocol (RSTP)

RSTP reduces the convergence time for network topology changes to about 10% of that required by the older IEEE 802.1D STP standard.

Routing Information Protocol (RIP)

The RIP protocol seeks to find the shortest route to another device by minimizing the distance-vector, or hop count, which serves as a rough estimate of transmission cost. RIP-2 is a compatible upgrade to RIP. It adds useful capabilities for subnet routing, authentication, and multicast transmissions.

Secure Shell (SSH)

A secure replacement for remote access functions, including Telnet. SSH can authenticate users with a cryptographic key, and encrypt data connections between management clients and the switch.

Simple Mail Transfer Protocol (SMTP)

A standard host-to-host mail transport protocol that operates over TCP, port 25.

Simple Network Management Protocol (SNMP)

The application protocol in the Internet suite of protocols which offers network management services.

Simple Network Time Protocol (SNTP)

SNTP allows a device to set its internal clock based on periodic updates from a Network Time Protocol (NTP) server. Updates can be requested from a specific NTP server, or can be received via broadcasts sent by NTP servers.

Spanning Tree Algorithm (STA)

A technology that checks your network for any loops. A loop can often occur in complicated or backup linked network systems. Spanning Tree detects and directs data along the shortest available path, maximizing the performance and efficiency of the network.

Telnet

Defines a remote communication facility for interfacing to a terminal device over TCP/IP.

Terminal Access Controller Access Control System Plus (TACACS+)

TACACS+ is a logon authentication protocol that uses software running on a central server to control access to TACACS-compliant devices on the network.

Transmission Control Protocol/Internet Protocol (TCP/IP)

Protocol suite that includes TCP as the primary transport protocol, and IP as the network layer protocol.

Trivial File Transfer Protocol (TFTP)

A TCP/IP protocol commonly used for software downloads.

User Datagram Protocol (UDP)

UDP provides a datagram mode for packet-switched communications. It uses IP as the underlying transport mechanism to provide access to IP-like services. UDP packets are delivered just like IP packets – connection-less datagrams that may be discarded before reaching their targets. UDP is useful when TCP would be too complex, too slow, or just unnecessary.

Virtual LAN (VLAN)

A Virtual LAN is a collection of network nodes that share the same collision domain regardless of their physical location or connection point in the network. A VLAN serves as a logical workgroup with no physical barriers, and allows users to share information and resources as though located on the same LAN.

Virtual Router Redundancy Protocol (VRRP)

A protocol that uses a virtual IP address to support a primary router and multiple backup routers. The backups can be configured to take over the workload if the master fails or to load share the traffic. The primary goal of VRRP is to allow a host device which has been configured with a fixed gateway to maintain network connectivity in case the primary gateway goes down.

XModem

A protocol used to transfer files between devices. Data is grouped in 128-byte blocks and error-corrected.

Index

Numerics

802.1x, port authentication 3-57, 4-79

A

acceptable frame type 3-133, 4-192

Access Control List *See* ACL

ACL

Extended IP 3-67, 4-87, 4-88, 4-91

MAC 3-67, 4-87, 4-102,
4-102–4-104

Standard IP 3-67, 4-87, 4-88, 4-90

Address Resolution Protocol *See* ARP

address table 3-102, 4-166

aging time 3-105, 4-169

ARP

configuration 3-195, 4-241

description 3-194

proxy 3-194, 4-243

statistics 3-199, 4-248

B

BOOTP 3-18, 4-236

BPDU 3-106

broadcast storm, threshold 3-94, 4-155

C

Class of Service *See* CoS

CLI, showing commands 4-4

command line interface *See* CLI

community string 2-6, 3-36, 4-115

configuration settings, saving or
restoring 2-8, 3-22, 4-64

console port, required connections 2-2

CoS

configuring 3-139, 4-207

DSCP 3-147, 3-150, 3-151, 4-216

IP port priority 3-149, 4-213

IP precedence 3-146, 4-214

layer 3/4 priorities 3-145, 4-213

queue mapping 3-141, 4-210

queue mode 3-143, 4-208

traffic class weights 3-143, 4-210

D

default gateway, configuration 3-16,
3-191, 4-238

default priority, ingress port 3-139,
4-209

default settings, system 1-6

DHCP 3-18, 4-236

address pool 3-174, 4-131

client 3-16, 4-127, 4-141

dynamic configuration 2-5

relay service 3-170, 4-128

server 3-172, 4-130

Differentiated Code Point Service *See*
DSCP

DNS

default domain name 3-165, 4-142

displaying the cache 3-169

domain name list 3-165, 4-141

enabling lookup 3-165, 4-145

name server list 3-165, 4-144

static entries 3-167

Domain Name Service *See* DNS

downloading software 3-20, 4-64

DSCP

enabling 3-145, 4-216

mapping priorities 3-147, 3-150,
3-151, 4-216

DVMRP

configuring 3-248, 4-295

global settings 3-248, 4-295–4-299

interface settings 3-251,
4-299–4-300

neighbor routers 3-253, 4-303

routing table 3-254, 4-302

dynamic addresses, displaying 3-103,
4-167

Dynamic Host Configuration Protocol
See DHCP

E

edge port, STA 3-115, 3-117, 4-181

event logging 4-44

F

firmware

- displaying version 3-12, 4-62
- upgrading 3-20, 4-64

GGARP VLAN Registration Protocol *See* GVRPgateway, default 3-16, 3-191, 4-238
GVRP

- global setting 3-127, 4-203
- interface configuration 3-133, 4-204

H

hardware version, displaying 3-12, 4-62

HTTPS 3-48, 4-32

HTTPS, secure server 3-48, 4-32

I

IEEE 802.1D 3-105, 4-171

IEEE 802.1s 4-171

IEEE 802.1w 3-105, 4-171

IEEE 802.1x 3-57, 4-79

IGMP

- description of protocol 3-153
- groups, displaying 3-159, 4-223, 4-234
- Layer 2 3-154, 4-221
- Layer 3 3-161, 4-229
- query 3-154, 4-224, 4-229
- query, Layer 2 3-155, 4-224
- query, Layer 3 3-161, 4-229
- services, displaying 3-164, 4-234
- snooping 3-154, 4-221
- snooping, configuring 3-155, 4-221

ingress filtering 3-133, 4-193

IP address

- BOOTP/DHCP 3-18, 4-127, 4-236
- setting 2-4, 3-15, 4-236

IP port priority

- enabling 3-149, 4-213
- mapping priorities 3-149, 4-214

IP precedence

- enabling 3-145, 4-214

mapping priorities 3-146, 4-215

IP routing 3-188, 4-244

- configuring interfaces 3-192, 4-236
- enabling or disabling 3-191, 4-244
- status 3-191, 4-244
- unicast protocols 3-190

IP, statistics 3-200, 4-248

J

jumbo frame 4-63

L

LACP

- configuration 4-163
- local parameters 3-91
- partner parameters 3-93
- protocol parameters 3-88, 4-163

Link Aggregation Control Protocol *See* LACP

link type, STA 3-115, 3-117, 4-183

logging

- syslog traps 4-47
- to syslog servers 4-46

log-in, Web interface 3-2

logon authentication 3-44, 4-70

- RADIUS client 3-46, 4-72
- RADIUS server 3-46, 4-72
- TACACS+ client 3-46, 4-75
- TACACS+ server 3-46, 4-75

logon authentication, sequence 3-46, 4-70, 4-71

M

main menu 3-4

Management Information Bases (MIBs) A-3

mirror port, configuring 3-96, 4-160

MSTP 4-171

- global settings 3-118, 4-169
- interface settings 3-116, 4-170

multicast filtering 3-153, 4-220

multicast groups 3-159, 3-164, 4-223

- displaying 3-164, 4-223
- static 3-159, 4-221, 4-223

multicast routing 3-244, 4-291

- description 3-244

DVMRP 3-248, 4-295
 enabling 3-244, 4-293
 general commands 4-293
 global settings 3-244, 4-293
 PIM-DM 3-255, 4-304
 routing table 3-245, 4-293
 multicast services
 configuring 3-160, 4-221
 displaying 3-159, 4-223
 multicast, static router port 3-158,
 4-227, 4-291

O

OSPF 3-218, 4-259
 area border router 3-219, 4-264
 AS summary route 3-236, 4-265
 autonomous system boundary
 router 3-220, 4-262
 backbone 3-222, 4-267
 default external route 3-220, 4-262
 general settings 3-219, 4-259
 normal area 3-222, 4-267
 NSSA 3-222, 4-269
 redistributing external routes 3-237,
 4-266
 stub 3-222, 4-268
 transit area 3-222, 4-270
 virtual link 3-231, 4-270

P

password, line 4-13
 passwords 2-4
 administrator setting 3-44, 4-27
 path cost 3-107, 3-114
 method 3-111, 4-174
 STA 3-107, 3-114, 4-174
 PIM-DM 3-255, 4-304
 configuring 3-255, 4-304
 global configuration 3-255, 4-304
 interface settings 3-256,
 4-305–4-309
 neighbor routers 3-259, 4-310
 port authentication 3-57, 4-79
 port priority
 configuring 3-139, 4-207
 default ingress 3-139, 4-209

STA 3-115, 4-180
 port security, configuring 3-55, 4-77
 port, statistics 3-98, 4-157
 ports
 autonegotiation 3-81, 4-151
 broadcast storm threshold 3-94,
 4-155
 capabilities 3-81, 4-152
 duplex mode 3-81, 4-150
 flow control 3-81, 4-153
 forced selection on combo
 ports 3-80, 4-154
 speed 3-81, 4-150
 ports, configuring 3-78, 4-149
 ports, mirroring 3-96, 4-160
 priority, default port ingress 3-139,
 4-209
 problems, troubleshooting B-1
 protocol migration 3-117, 4-185
 proxy ARP 3-194, 4-243

Q

queue weights 3-143, 4-210

R

RADIUS, logon authentication 3-46,
 4-72
 rate limits, setting 3-97, 4-162
 remote logging 4-47
 restarting the system 3-32, 4-23
 RIP
 configuring 3-208, 4-249–4-257
 description 3-190
 global settings 3-209, 4-249
 interface protocol settings 3-212,
 4-250–4-256
 specifying interfaces 3-211, 4-250
 statistics 3-215, 4-258
 router redundancy
 protocols 3-179, 4-311
 VRRP 3-180, 4-311
 routing table, displaying 3-207, 4-246,
 4-247
 RSTP 3-105, 4-171
 global configuration 3-106, 4-171

S

secure shell 3-50, 4-35
Secure Shell configuration 3-50, 4-38
serial port
 configuring 4-11
Simple Network Management Protocol
 See SNMP
SNMP 3-35
 community string 3-36, 4-115
 enabling traps 3-37, 4-118
 filtering IP addresses 4-125
 trap manager 3-37, 4-117
software
 displaying version 3-12, 4-62
 downloading 3-20, 4-64
Spanning Tree Protocol See STA
specifications, software A-1
SSH, configuring 3-50, 4-38
STA 3-105, 4-169
 edge port 3-115, 3-117, 4-181
 global settings, configuring 3-109,
 4-170–4-175
 global settings, displaying 3-106,
 4-186
 interface settings 3-113, 3-121,
 3-122, 4-180–4-185, 4-186
 link type 3-115, 3-117, 4-183
 path cost 3-107, 3-114, 4-180
 path cost method 3-111, 4-174
 port priority 3-115, 4-180
 protocol migration 3-117, 4-185
 transmission limit 3-111, 4-175
standards, IEEE A-2
startup files
 creating 3-23, 4-64
 displaying 3-20, 4-58
 setting 3-20, 4-69
static addresses, setting 3-102, 4-166
static routes, configuring 3-206, 4-245
statistics
 ARP 3-199, 4-248
 ICMP 3-202, 4-248
 IP 3-200, 4-248
 port 3-98, 4-157
 RIP 3-215, 4-258
 TCP 3-205, 4-248

UDP 3-204, 4-248
STP 3-109, 4-171
STP *Also see* STA
system clock, setting 3-33, 4-53
system software, downloading from
 server 3-20, 4-64

T

TACACS+, logon authentication 3-46,
 4-75
time, setting 3-33, 4-53
traffic class weights 3-143, 4-210
trap manager 2-7, 3-37, 4-117
troubleshooting B-1
trunk
 configuration 3-84, 4-163
 LACP 3-86, 4-163, 4-164
 static 3-85, 4-164

U

upgrading software 3-20, 4-64
user account 3-44
user password 3-44, 4-27, 4-28

V

Virtual Router Redundancy Protocol
 See VRRP
VLANs 3-124–3-136, 4-188–4-199
 adding static members 3-130,
 3-132, 4-195
 creating 3-129, 4-190
 description 3-124
 displaying basic information 3-127,
 4-204
 displaying port members 3-128,
 4-197
 egress mode 3-134, 4-192
 interface configuration 3-133,
 4-192–4-196
 private 3-135, 4-198
 protocol 3-136, 4-199
VRRP 3-180, 4-311
 authentication 3-182, 4-313
 configuration settings 3-180, 4-311
 group statistics 3-186, 4-316
 preemption 3-181, 3-182, 4-315

priority 3-181, 3-182, 4-313
protocol message statistics 3-185,
4-318
timers 3-182, 4-314
virtual address 3-180, 3-182, 4-312

W

Web interface
access requirements 3-1
configuration buttons 3-3
home page 3-2
menu list 3-4
panel display 3-3

Planex L3 Switch
SF-0408MGL
E092005-R01